

## M495 Series

### THREE PHASE GCU POWER SUPPLY



#### DESCRIPTION

M495 is a 600W non-isolated AC/DC converter. The converter has a wide input supply range of 25Vrms (line to line) to 135V rms (line to line) and requires no minimum load for normal operation. The converter has two D-type connectors for input and output.

In addition to the power lines the converter has an option for RPM signal responding according to line frequency, output voltage status discrete and input voltage analog signal.

The M495 is air forced cooled unit. The unit has small cooling fins and fairly close to each other which is the design for forced cooling air (the unit usually mounted near engine in a UAV application) and have airflow from that direction. The unit need about 12CFM for keeping operation at 60C ambient.

#### FEATURES

- Non-isolated AC/DC converter
- Wide input supply range of 25Vrms (line to line) to 135V rms (line to line)
- For extended input version
- two D-type connectors for input and output
- 600W non-isolated AC/DC converter
- Built-in EMI Input & Output Filters
- 25V<sub>line to line</sub> - 135 V<sub>line to line</sub> input voltage range, compatible with the rectified output of most PMG's.
- Overload, Over-voltage and Over-temp protections
- Compatible with permanent magnet generator characteristics
- No external capacitors required
- No minimum load required
- Air forced cooled
- BIT output.
- Upon request, the output voltage can be factory trimmed above or below 24Vdc.

## SPECIFICATIONS:

<b>DC Input</b>	Voltage and Frequency	Normal range: 25V <sub>line to line</sub> -135 V <sub>line to line</sub> 133Hz – 400Hz
	Isolation	Input to Chassis: 500VDC
<b>DC Output</b>	Rating	24V / 25A
	Ripple	Less than 500 mVp-p, typical
	Isolation	Output to Chassis: 500VDC
	Current Limit & Overload	<b>Short circuit protection with auto Recovery</b> When output is overloaded (typical above 27A) output voltage is reduced as a result of the overload . The converter has a fold back type protection. At short conditions output current drops to about 10A in order to reduce dissipated power.
	Overvoltage Protection	<b>Overvoltage protection with auto-recovery</b> The power supply contains an over voltage circuit that operates a shut down to the PWM circuit.
<b>Control &amp; Indication</b>	Functions and Signals	<p><b>VIN BIT</b> This signal is used to indicate the input voltage of the generator.</p> <p><b>RPM</b> This signal is used to indicate the RPM value of the generator.</p> <p><b>Under VOUT BIT</b> The BIT output is an Open/Short type logic signal that indicates that the M495 is operating properly. The BIT signal is designed to interface with a 51 Ω pull-up resistor (on the receiving side). When no-fault detected (20&lt;Vout&lt;24) the signal will be short through 51Ω, when a fault is detected (15&lt;Vout&lt;17), the signal will be an open drain.</p>
<b>Environment Designed to meet MIL-STD810F</b>	Temperature	Operating: -40°C to +85°C (at the bottom of the cooling fins) Storage: -40°C to +85°C
	Humidity	Method 507.4 - Up to 95% RH
	Salt-fog	Method 509.4
	Mechanical Shock	Saw-tooth 20g peak 10 msec
	Vibration	0.05 g <sup>2</sup> /Hz, 50Hz-2kHz
	Fungus	Does not support fungus growth, in accordance with the guidelines of MIL-STD-454, Requirement 4.

<b>EMI</b>	Built-in EMI Input & Output Filters
<b>Cooling Requirements</b>	The unit has small cooling fins and fairly close to each other which is the design for forced cooling air (the unit usually mounted near engine in a UAV application) and have airflow from that direction.
<b>Form factor</b>	12mm wide, 40mm high, 90mm long, for detailed dimensions and tolerances see Drawing: M495001
<b>Weight</b>	580gr

## ELECTRICAL CHARACTERISTICS

Unless otherwise specified:  $V_{in} = 30$  to  $200$  Vdc,  $T(amb) = -40^{\circ}C$  to  $+71^{\circ}C$ ,  $T(base) \leq 85^{\circ}C$ .

PARAMETER	CONDITIONS	MIN.	TYP.	MAX.
Recommended Input voltage (line to line)	---	25 $V_{rms}$		135 $V_{rms}$
Output voltage	$I_{out} = 25A$	23.0 $V_{DC}$	24.0	25.0 $V_{DC}$
Output current	$V_{in} > 25V$	25A		
Efficiency	$V_{in} = 80V$ / max rated $P_{out}$		90%	
Line / Load regulation	$V_{in} = 25V$ to $135V$ $P_{out} = 10\%$ to max rated $P_{out}$			$\pm 500$ mV
Output ripple	Full load (resistive) with $0.1\mu F$ , 20MHz BW			1 $V_{p-p}$
Input EMI current @ 600kHz	Input terminated through LISN			90 dB $\mu A$
Current limit threshold	$V_{in} = 90V$	15A		
Output turn-on time	$V_{in} > 25V$			200 msec
Bit OK signal Bit signal = short through $51\Omega$	$V_{out}$ ok threshold	20V		24V
Bit OK fault level Bit signal = open	$V_{out}$ fault threshold	15V		17V
Frequency at which turn-on is enabled Recommended Input voltage (line to line)	Output loaded with full load equivalent resistor ---	300 Hz		400 Hz

## PIN ASSIGNMENT: INPUT CONNECTOR J1

Connector type: M24308/24-38 or eq.  
 Mates with: M24308/1-2 or eq.

PIN No.	Function
6,7,8,14,15	Phase A
4,5,11,12,13	Phase B
1,2,3,9,10	Phase C

## PIN ASSIGNMENT: OUTPUT CONNECTOR J2

Connector type: M24308/23-27 or eq.  
 Mates with: M24308/3-3 or eq.


PIN No.	Description
1	VIN BIT
2	RPM
3-7,15-20	VOUT
8-13, 21-25	VOUT RTN
14	Under VOUT BIT

Note: All pins with identical function/designation should be connected together for optimal performance.

## HOW TO ORDER

<b>Part Number</b>	CF-02EM495	Three phase gcu power supply
--------------------	------------	---------------------------------

## OUTLINE DRAWING

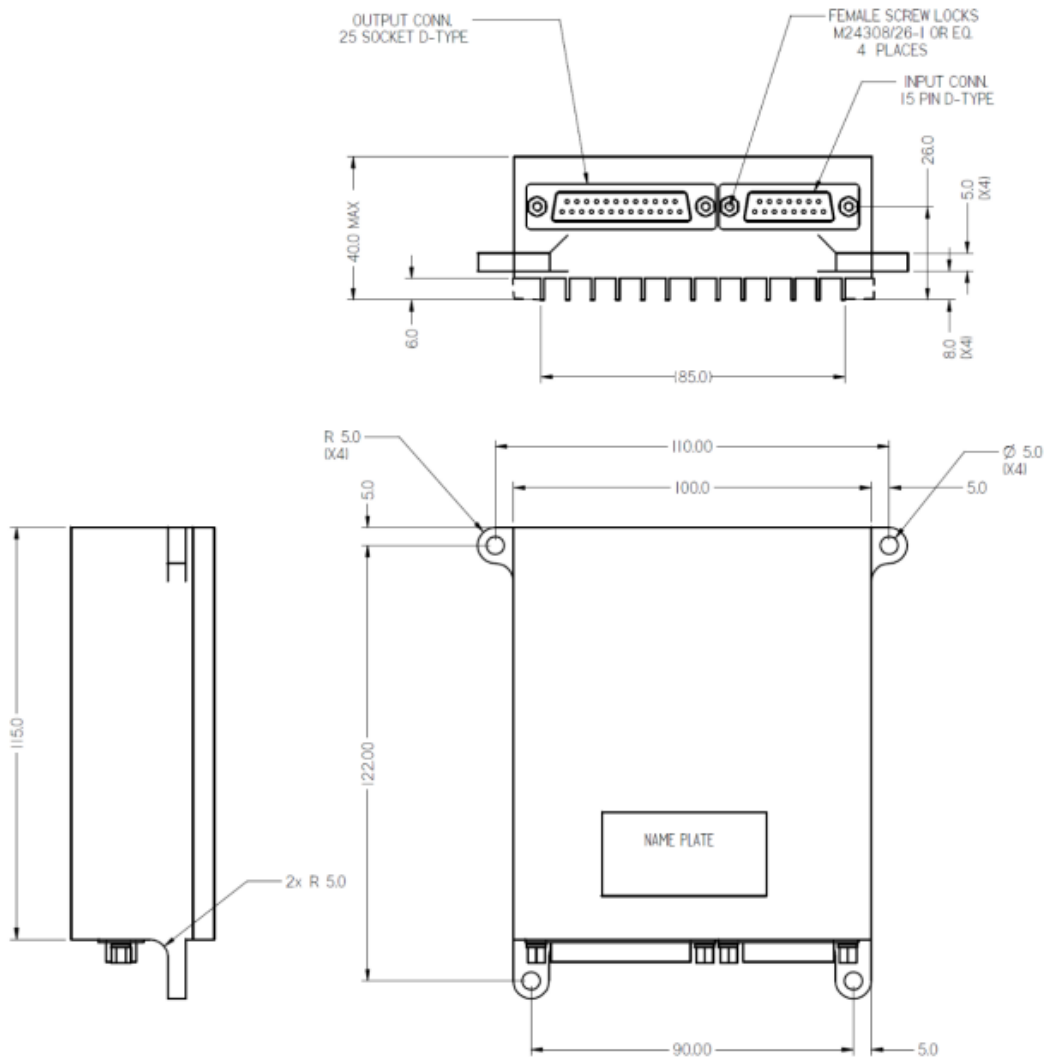

Notice: Specifications are subject to change without notice. Contact your nearest Amphenol Corporation Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all connectors.

AMPHENOL is a registered trademark of Amphenol Corporation.  
PRELIMINARY

©2023 Amphenol Corporation REV:



40-60 Delaware Avenue  
Sidney, NY 13838  
amphenol-aerospace.com | amphenolmao.com