

CF-9015

CF-9015


CF-198133-()
CF-198134-()
Fiber Optic Termini
Cable Installation Instructions

WARNING NOTE:

Caution: Looking into fibers illuminated with laser light can cause eye damage. Follow safety procedures recommended by light source manufacturers.

Extreme care should be taken when handling glass fiber to avoid penetration of skin.

1. Ref. drawings CF-198133-CD, CF-198134-CD and for identification and orientation of parts. Visually inspect cable for optical continuity.
2. Slide shrink tube back onto cable.
3. Strip cable to indicated dimensions.
Note: The right angle tube will have to be slid on before removing pyrocoating if applicable.

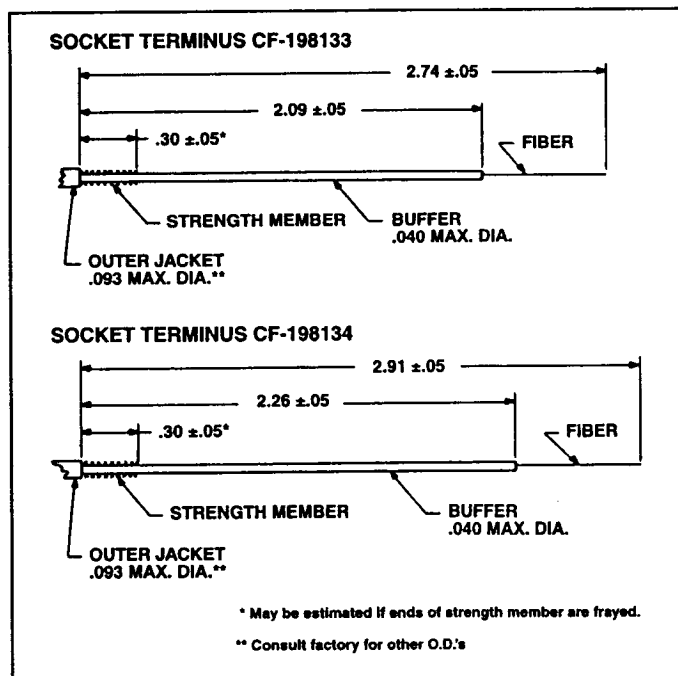

4. Slide right angle tube back onto buffer and under strength member (note orientation).
5. Wipe off bare fiber with MEK or equivalent. Fiber surfaces must be clean and dry before bonding.
6. (Optional) Push fiber into terminus and remove to insure proper fiber hole size.
7. Prepare epoxy per manufacturer's instructions.

Recommended Epoxy: 200°C Max Service Temp.; #353ND

Suggested Source:

Epoxy Technologies, Inc.
P.O. Box 567
Billerica, MA 01865

8. Fill syringe with epoxy.
 9. Wipe bare fiber with epoxy. **Use epoxy sparingly** (should resemble dew on a spider web).
 10. Add epoxy to outside of the rear end of terminus (.063 dia. for CF-198134 or .082 dia. for CF-198133) for approximately .150. This is to ensure bonding of the right angle tube to the terminus body. Carefully push stripped fiber and right angle tube into/on terminus until buffer is in contact with rear of ceramic and right angle tube is fully seated on rear of terminus. Outer jacket will be approximately .080 from rear of right angle tube. Bare fiber should be sticking out of front of terminus. There should be no epoxy on front face. If there is, additional polishing time may be required. Add epoxy to end of right angle tube (under strength member) and to outer jacket of cable for approximately .150 to insure sealing to shrink tube. Evenly distribute strength member over rear of right angle tube. Bring up shrink tube to position shown in reference drawings (see step 1).
 11. Shrink tube using heat gun. Heat gun to be rated at 475 minimum wattage and to generate between 300° - 400°C air flow temperature. Do not apply excessive heat to F.O. cable jacketing. Epoxy at rear of terminus will turn amber color at full cure. When this happens, remove heat immediately. Make sure right angle tube is fully seated on end of terminus. Cure epoxy using heat gun. Epoxy at junction of right angle tube and terminus will turn amber color at full cure. When this happens, remove heat immediately.
Note: Small bead of epoxy at junction must be visible before starting curing.
 12. To cure the epoxy at the front of the terminus between fiber and ceramic, follow either of the approved procedures listed below:
Option 1: When using a heat gun @ 475 minimum wattage
a. heat gun to generate between 300-400°C air flow temperature
b. insert end of ceramic and fiber into air flow for ten 1 second intervals.
Option 2: When using an oven - step cure per the following cure schedule:
- | Temp. (°C) | Duration (minutes) |
|--------------|--------------------|
| 80 | 120 |
| 125 | 120 |
| 150 | 120 |
13. Scribe glass fiber approximately .010 above ceramic. Grasp fiber and pull slightly until fiber breaks.
 14. Take a piece of 15 micron lapping film (approx. 8 X 3 inches long) and hold in hand so it has a slight concave radius to it. Complete 40 gentle strokes back and forth over termini to be polished. Use approximately a 4-inch stroke. This step will reduce the fiber length to the right amount for final polish. (Holding the lapping film on a radius ensures that the fiber length will not be polished flush with ceramic.) Repeat for other fibers.
 15. Thoroughly clean termini.
 16. The fully cured epoxied termini may be either hand polished or machine polished. Reference the following lists to determine which polishing fixture to use:

Hand Polishing

Termini P/N	Hand Polishing Fixture	Termini Capable of Polishing
CF-198133-()	11-12123	1
CF-198134-()		

Amphenol Aerospace

Machine Polishing

Using the Buehler Fibrmet* Optical Fiber Polisher and the Buehler Fibrscope* Portable microscope.

Amphenol Terminus P/N	Amphenol Buehler Fibrmet* Polishing Fixture P/N	Amphenol Buehler Fibrscope* Adaptor Body P/N
CF-198133-()	11-12103	11-12104
CF-198134-()		

After selecting the appropriate polishing fixture and adaptor, reference the Buehler Fibrmet* and Fibrscope* instructions for SMA type connectors to familiarize yourself with their operation. (For hand polishing go to step 27).


Machine Polishing.

17. For machine polishing Amphenol/Bendix size 16 ceramic termini, follow these instructions.
18. Bring the lobe of the cam to the vertical position by switching the Fibrmet* on and off.
19. Install .3 micron aluminum oxide polishing disc on left platen.
20. With the arm in the lock pin position, insert the terminus to be polished into the polishing fixture and secure.
21. Loosen the lock ring and rotate the arm counter clockwise to the left platen. Turn the adjustment collar in or out until the terminus just touches the surface of the disc. The contact should make only a light mark on the disc.
22. Tighten the lock ring against the adjustment collar.
23. Make a final adjustment by moving both the lock ring and the adjustment collar so that the terminus just touches the abrasive disc.
24. Polish terminus until an optically acceptable fiber end has been produced, approximately 1 minute. (See Figure 1). If a small amount of epoxy is on the polished surface, continue polishing until no epoxy can be seen with the naked eye. Inspect end of the optical fiber for desired finish by examining it with the Fibrscope* portable microscope or other microscope. Repeat polishing if required.
25. Thoroughly clean termini and fixtures.
26. After polishing has been done, go to step 31 of these instructions.

Hand Polishing

When hand polishing, follow these instructions:

27. Determine which termini are to be polished first. Use appropriate terminus holder (labeled socket) on bottom polishing plate.
28. Install terminus in bottom fixture, then screw on top fixture, capturing terminus.
29. Using a circular motion of approximately 2 inches in diameter, polish terminus on 1 micron lapping film backed by a smooth hard surface, approximately 40-50 seconds. If a small amount of epoxy is on the polished surface, continue polishing until no epoxy can be seen with the naked eye. Inspect end of the optical fiber for desired finish using a microscope. (See Figure 1). Repeat for other termini. (For an exceptionally fine finish, continue polishing terminus for 20-30 seconds using .3 micron lapping film. Thoroughly clean termini before proceeding with this step).
30. Thoroughly clean termini and fixture. Push on protection cap, when supplied. Cap must be removed before inserting termini into connector.
31. For socket terminus ONLY:
Push alignment sleeve onto socket terminus until fully seated. Note orientation of alignment sleeve in illustration below.

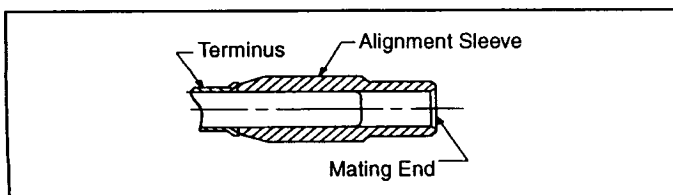

Push on protection cap, when supplied. Cap must be removed before inserting termini into connector.

32. Push termini into connector until fully seated. Care should be taken not to exceed minimum bend radius of buffered fiber. If desired, insertion tool M81969/14-03 may be used to aid assembly. For removal of termini, use extraction half of supplied tool.

Recommended Equipment

Hand Polishing

- Razor blade and/or exacto knife
- MEK
- ISO Propanol
- Epoxy, as required
- 1 syringe
- Polishing fixture: 11-12123 or equivalent, as required
- 15 & 1 micron aluminum oxide lapping film or equivalent, as required
- Optional: .3 micron aluminum oxide lapping film or equivalent, as required
- Microscope, 100 power or greater
- Cotton swabs
- Small scissors
- Cutting pliers
- Wire strippers or hot tweezers, depending on cable type
- .014 no nik wire strippers or equivalent
- Hot air gun
- Fiber scribe

Recommended Equipment:

Machine Polishing

- Buehler Fibrmet* Optical Fiber Polisher or equivalent
- Buehler Fibrscope* portable microscope or equivalent
- 4 inch dia. PSA backed .3 micron aluminum oxide polishing discs or equivalent as required
- Polishing fixture: 11-12103 or equivalent
- Fibrscope* adaptor: 11-12104 or equivalent
- Razor blade and/or exacto knife
- MEK
- ISO Propanol
- Epoxy, as required
- 1 syringe
- Cotton swabs
- Small scissors
- Cutting pliers
- Wire strippers or hot tweezers, depending on cable type
- .014 no nik wire strippers
- Hot air gun
- Fiber scribe

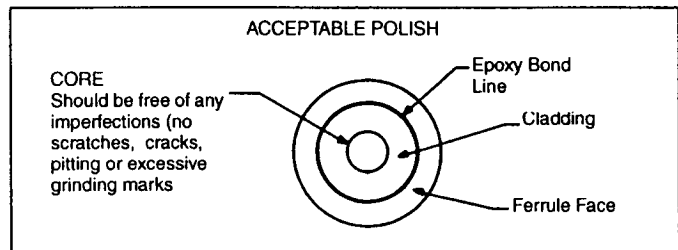


Figure 1

* Fibrmet and Fibrscope are registered trademarks of Buehler Ltd.