


# Fiber Optic Assembly Configurator

Example Part Number:

CF1000-0915CD-258A

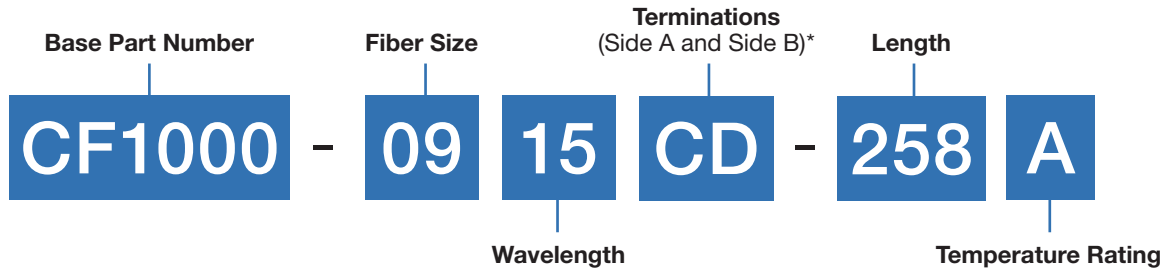

Fiber Size	
09	SM
62	62.5/125 MM
M2	50/125 MM OM2
M3	50/125 MM OM3
M4	50/125 MM OM4

Wavelength	
85	850nm
13	1310nm
15	1550nm

Terminations	
A	29504/04 style multi-mode pin
B	29504/05 style multi-mode socket
C	Same as A except single mode
D	Same as B except single mode
E	JSFC18-2 multi-mode pin
F	JSFC17-2 multi-mode socket
G	JSFC18-1 single mode pin
H	JSFC17-1 single mode socket
J	LC
K	LC-APC
L	FC
M	FC-APC
N	ST
P	SC
R	Unterminated
X	Customer specified


Length	
000	Length in inches

Temperature Rating	
A	-40°C to +85°C
B	-55°C to +125°C

**Notes:**

- All fiber optic cable is single fiber with either 1.8mm or 2.0mm jacket diameter
- Cables come tested for insertion loss and end face geometry per GR-326

\* See diagram below:



CONTACT US:  
Joe Ingold  
E-mail: [jingold@amphenol-aa.com](mailto:jingold@amphenol-aa.com)  
Phone: 607-267-0699