


REV. A	SHEET 1 OF 1	DOCUMENT NO. 21-033449-01HF
REVISIONS		
LTR	DESCRIPTION	DATE
A	INITIAL RELEASE	

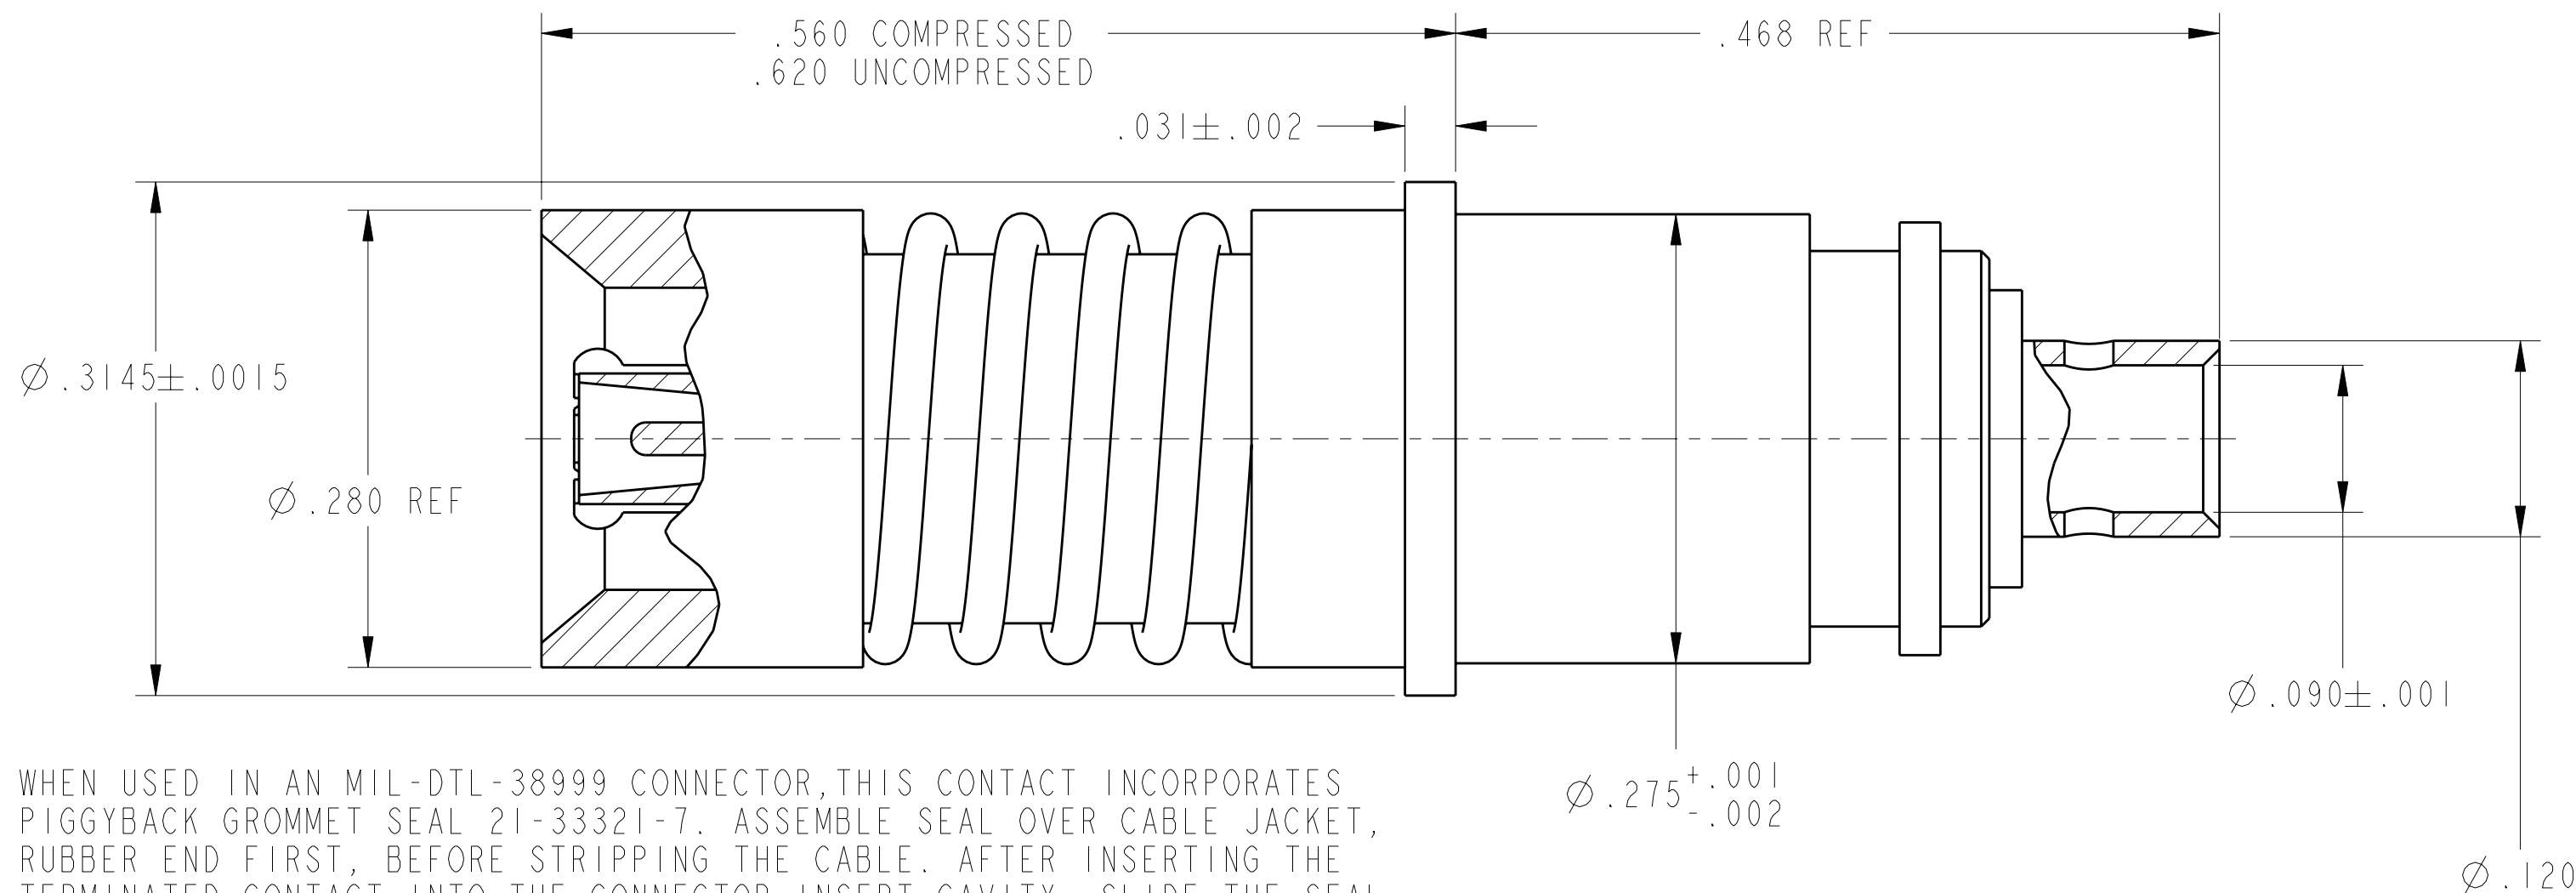

2. WHEN USED IN AN MIL-DTL-38999 CONNECTOR, THIS CONTACT INCORPORATES PIGGYBACK GROMMET SEAL 21-33321-7. ASSEMBLE SEAL OVER CABLE JACKET, RUBBER END FIRST, BEFORE STRIPPING THE CABLE. AFTER INSERTING THE TERMINATED CONTACT INTO THE CONNECTOR INSERT CAVITY, SLIDE THE SEAL INTO THE CONNECTOR GROMMET OPENING. SEAL MUST BE PURCHASED SEPARATELY.

- 1. MATERIAL:
 - BODY & SLEEVE: STAINLESS STEEL PER AMS 5640, ALLOY UNS S30300, TYPE 1
 - FERRULE: BRASS PER ASTM B16 ALLOY UNS NO. C36000
 - CONTACT & LOCK RING: BERYLLIUM COPPER PER ASTM B196, ALLOY NO. UNS C17300, TD04
 - INSULATOR: PTFE PER ASTM D1710, TYPE 1, GRADE 1, CLASS B
 - GASKET: SILICONE RUBBER PER A-A-59588, CLASS 2B, GRADE 50/60
 - SPRING: STAINLESS STEEL PER ASTM A313, TYPE 631
 - FINISH:
 - BODY, SLEEVE & SPRING: PASSIVATED PER AMS-2700, TYPE 2
 - CONTACT & FERRULE: GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27; OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.
 - LOCK RING: NICKEL PER AMS-QQ-N-290
 - PERFORMANCE:
 - IMPEDANCE: 50 OHMS
 - FREQ. RANGE: DC TO 40 GHZ
 - VSWR: 1.40:1 MAX. MATED PAIR DC TO 40 GHZ
 - INSERTION LOSS: .06 X SQRT(F(F IN GHZ))
 - DWV: 1000 VRMS
 - OPERATING TEMP: -55°C TO +125°C

NOTES:

THE USE OF THIS DOCUMENT IS UNLIMITED. HOWEVER, DOCUMENTS REFERENCED HEREON MAY CONTAIN LIMITED RIGHTS DATA.

RELEASED / Apr . 10 2012, 9:07:37 AM

21-033449-01HF

SHEET 1 OF 1

REV. A

N/A

NEXT ASSEMBLY

PRO/ENGINEER INFORMATION

Pro/e Model Used:
21-033449_DUMMY-1.ASY.ASSEM
Drawing Name:
21-033449-01HF

UNLESS OTHERWISE SPECIFIED	SPECIFICATIONS
LINEAR DIMENSIONS ARE IN INCHES TOLERANCES: .XXXX = ±.0005 ANGLES= ±2° .XXX = ±.010 .XX = ±.03 .X = ±.1	MATERIAL SPEC. N/A
DIM. & TOL. PER ASME Y14.5M; DRM PER MIL-DTL-31000; OTHER Amphenol Stds. PER 9-3800	PROCESS SPEC. N/A
LEGENDS: = FLAG NOTE CALL OUT REFERENCE ONLY	

I	I	21-033449-01M	CONTACT ASSEMBLY	
POS	QTY	PART NUMBER	DESCRIPTION	NOTE
PARTS LIST				
APPROVALS PREPARED BY LRATCHFORD ENGINEER IN CHARGE LRATCHFORD DESIGN MANAGER SHEPLER DESIGN ACTIVITY GROUP MIL-AERO-DEVELOP DATE 04-Apr-12 THIRD ANGLE PROJECTION				
AMPHENOL CORPORATION 40-60 DELAWARE AVENUE SIDNEY, N.Y. 13858 40 GHZ BMZ SOCKET, FOR TFLEX-405 CABLE, FOR M38999 SIZE 8 CAVITY				
SIZE	CAGE CODE	DOCUMENT NO.	REV.	
C	77820	21-033449-01HF	A	
SCALE: 3.0	REF	21-033449-05HF	SHEET 1 OF 1	

21-033449-01HF

SHEET 1 OF 1

REV. A

C

B

A

FORMAT: C-U-E-1

Eng. PDM Information For Reference Only

SHEET 1 OF 1

21-033449-01HF