


REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPROVED
C		(CL II) SEE CHG NOTICE ECN: 20196-1	4/5/88 MCELLIGOTT	Nesbit
D		(CL I) REM'D NOTE 3; REM'D 9-6700, 9-7530 AND 9-3856-5; UPDATED BENDIX TO AMPHENOL ECN: B0989	2-10-11 JONES	

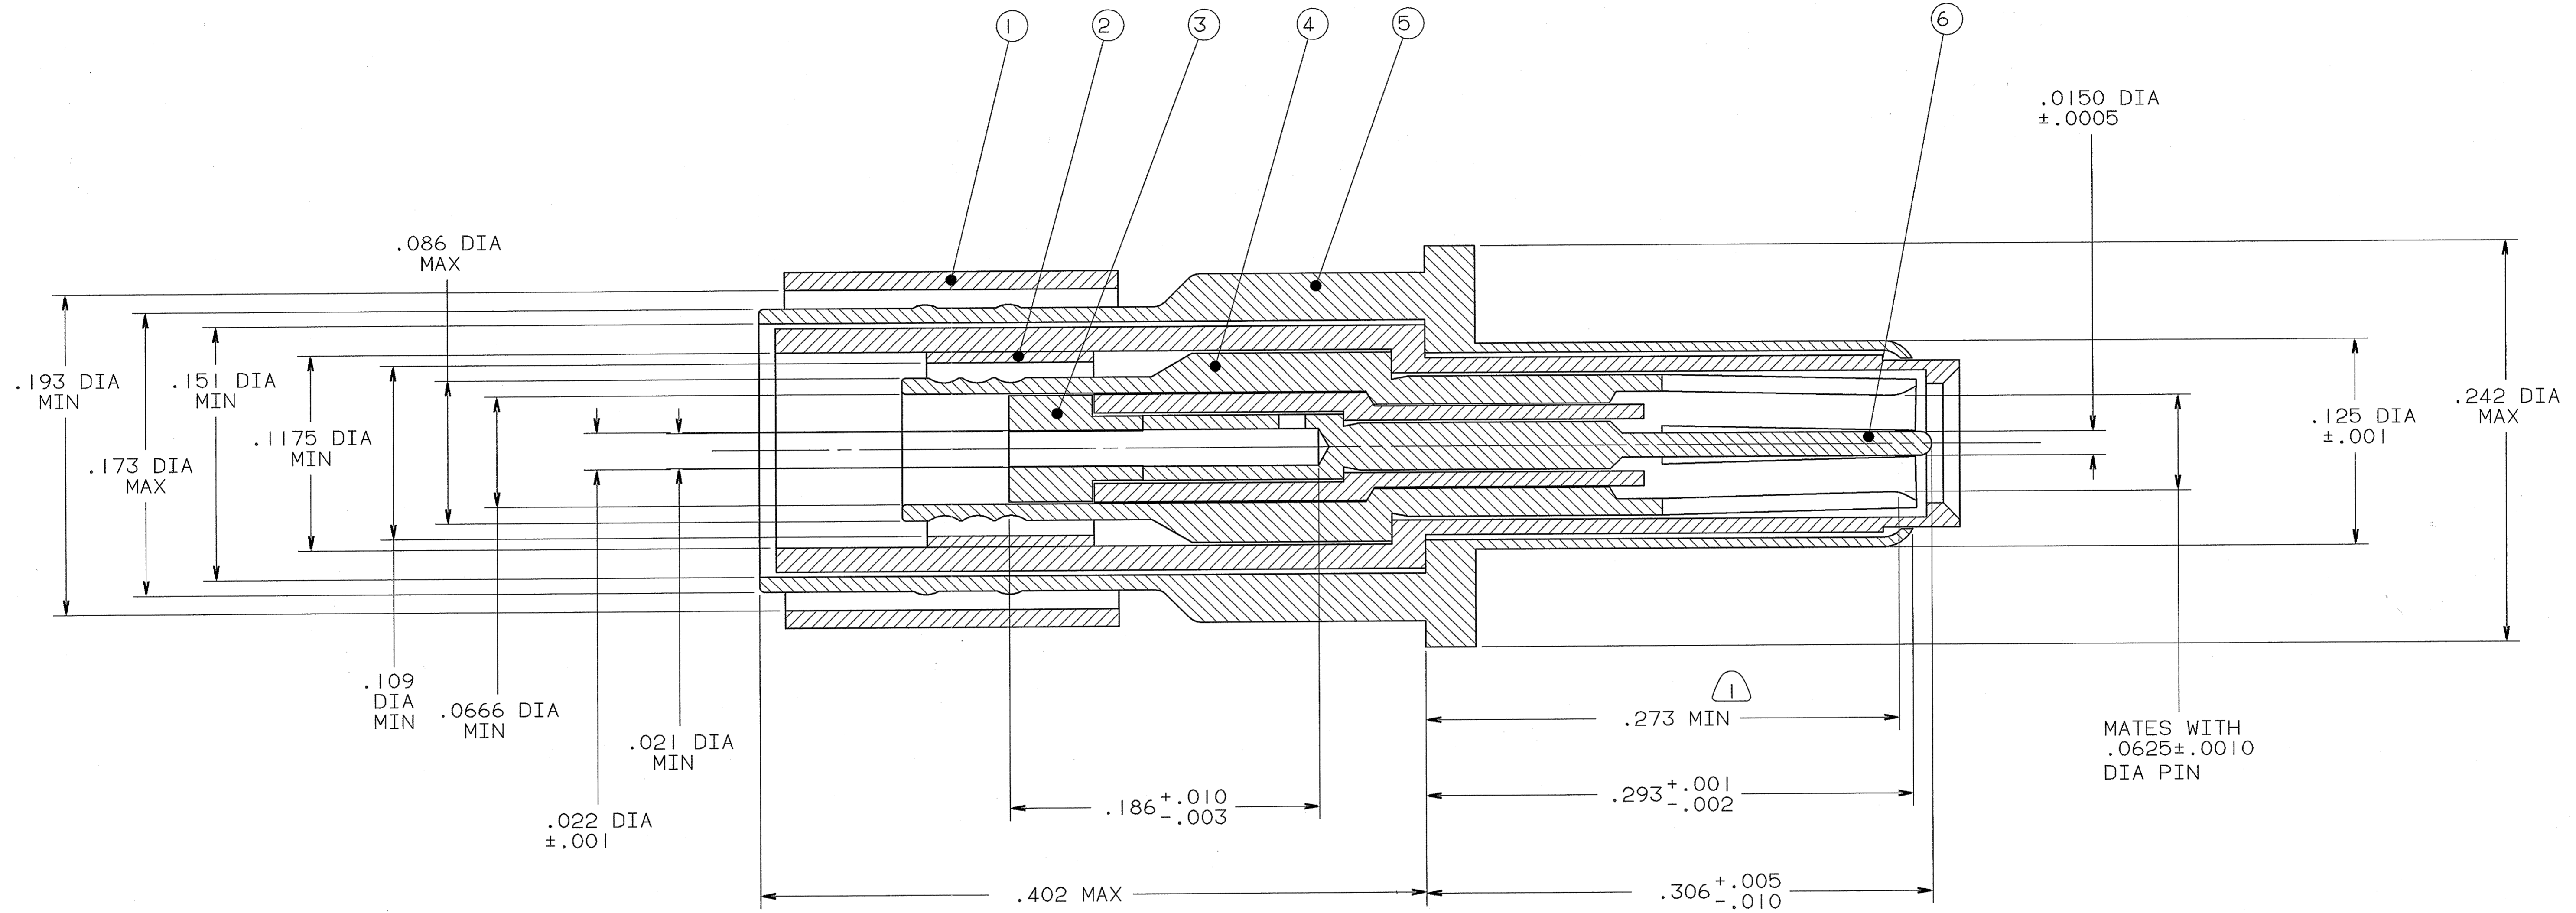

3. REMOVED ON ECN B0989, REV.D.

2. PROCESS SPEC:  
TEST 9-5272-31

1. INDICATED DIMENSION TO BE FROM REAR SHOULDER OF OUTER PIN TO THE POINT AT WHICH A .0625±.0002 DIA SQUARE ENDED PIN ENGAGES SOCKET CONTACT SPRING.

NOTES:

THE USE OF THIS DOCUMENT IS UNLIMITED. HOWEVER, DOCUMENTS REFERENCED HEREON MAY CONTAIN LIMITED RIGHTS DATA.

UNLESS OTHERWISE SPECIFIED  
LINEAR DIMENSIONS ARE IN INCHES.  
TOLERANCES: .XXX±.010,  
.XX ±.03, .X ±.1, ANGLES ±2°.  
OTHER STANDARDS PER 9-3800  
AND DOD-D-1000. NOTE REF= XX

FIND NO.	QTY RECD.	FSCM NO.	PART NUMBER	DESCRIPTION	NOTE REF.
7	1		21-33854-1	INSTALLATION INST	
6	1		21-33810-1	PIN, INNER	
5	1		21-33802-1	PIN, OUTER	
4	1		21-33806-1	SOCKET, INTERMEDIATE	
3	1		21-33816-1	INSULATOR, REAR	
2	1		21-33817-35	FERRULE, INTERMEDIATE	
1	1		21-33817-1	FERRULE, OUTER	

SPECIFICATIONS		SIGNATURES		DATES	
MATERIAL SPEC.	N/A	PREPARED	D. FREAR	4/16/86	
		CHECKED	BACHMAN	4/16/86	
PROCESS SPEC.	SEE NOTE 2	APPROVED	D. FREAR	4/21/86	
		APPROVED	AL DAVIS	4/30/86	

SCALE	20/1	WT.	REF	N/A	SHEET	N/A
-------	------	-----	-----	-----	-------	-----