

M8337 SERIES

DC/DC POWER SUPPLY



PRODUCT HIGHLIGHTS

- **MINIATURE**
- **HIGH DENSITY**
- **TRIPLE OUTPUT**
- **DC/DC CONVERTER**
- **UP TO 125W**

Applications

Military, Ruggedized, Telecom, Industrial Power Supply

Special Features

- Miniature size
- High efficiency
- Wide input range
- Input / Output isolation
- Fixed switching frequency (250 kHz)
- External synchronization capability
- TTL logic enable
- EMI filters included
- Indefinite short circuit protection with auto-recovery
- Over temperature protection

Environmental Conditions

Designed to meet MIL-STD-810F

Temperature:

Operating –55 °C to +85 °C
(baseplate) Storage –
55 °C to +125 °C

Altitude:

Method 500.4, Procedures I & II up to
70 000 ft. Operational

Humidity:

Method 507.4 - Up to 95% RH
(including condensation)

Salt Fog:

Method
509.4

Vibration

and Shock:

Shock: Saw-tooth, 20 g peak, 11 ms.
Vibration: Figure 514.5C-17 general
minimum integrity exposure (1 hour
per axis)

Reliability

150,000 hours, calculated IAW MIL-HDBK-
217F Notice 2, at +85 °C baseplate,
Ground Fixed.

Electrical Specifications

DC INPUT

Normal voltage range: 18 to
70 V_{DC} Option: 12 to 70 V_{DC} –
consult factory

Abnormal transient protection:

No damage (may shut down) when exposed
to abnormal transients IAW MIL-STD-1275A
(100 V for 50 ms) and MIL-STD-704A (80 V
for 0.1 s)

Efficiency: up to 80%

EMC: Designed to meet* MIL-STD-461F

CE101, CE102, CS101, CS114, CS115,
CS116, RE101, RE102, RS101, RS103

Isolation:

Input to Output:
200 V_{DC} Input to
Case: 200 V_{DC}

DC OUTPUT (floating)

Line/Load regulation:

Up to ±1% (no load to full load, –55 °C to
+85 °C) Ripple and Noise: 50 mV_{p-p}, typical

(max. 1%) Current limiting (Hiccup):

Continuous protection for unlimited time

Over Voltage Protection:

Passive transorbs on
outputs. Over

Temperature Protection:

Shutdown if baseplate temperature exceeds
+105 °C ± 5 °C; Automatic recovery
upon cooldown to below +95 °C ±
5 °C.


Isolation:

Output to Case: 100 V_{DC}

* Compliance achieved with 5μH
LISN, shielded harness and static resistive
load.

M8337 SERIES DC/DC POWER SUPPLY


Operational Block Diagram

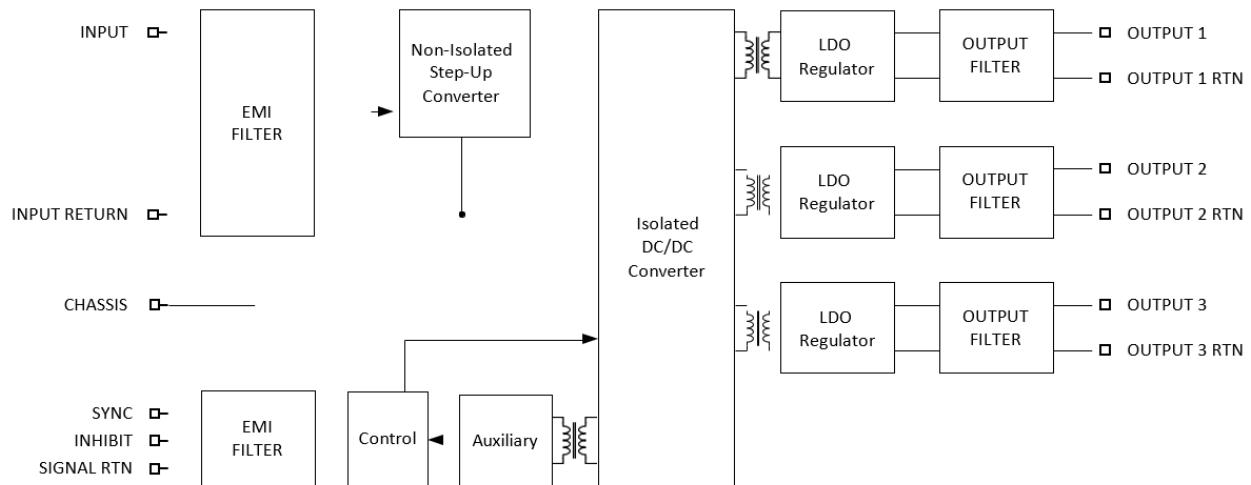

Outputs Range

Output #	Voltage Range	Current Range	Power Range
1	3.3 to 28 V _{DC}	0 to 10 A	0 to 50 W
2	3.3 to 28 V _{DC}	0 to 6 A	0 to 50 W
3	7 to 28 V _{DC}	0 to 6 A	0 to 50 W
Total			0 to 125 W

Typical Connection Diagram

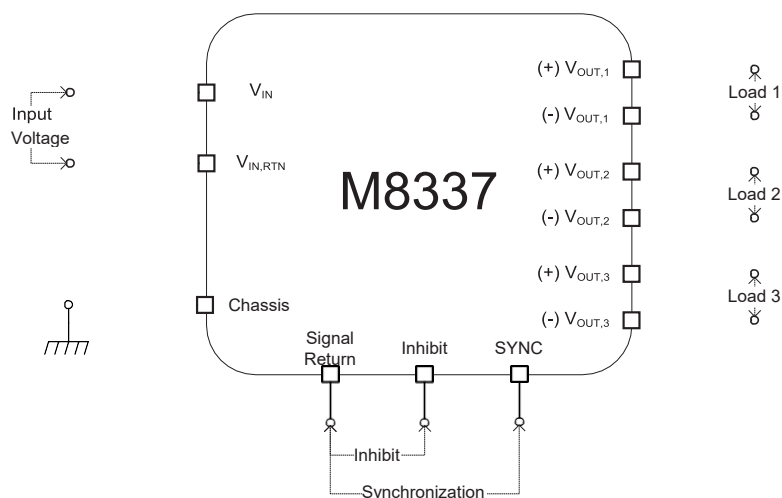

M8337 SERIES DC/DC POWER SUPPLY

Pin Assignment*


Connector type: M24308/24-39F or eq.

Mates with: M24308/2-3F or eq.

Pin No.	Function	
1	VIN (+)	●
2	VIN (+)	●
3	VIN RTN (-)	●
4	INHIBIT	●
5	SIGNAL RTN	●
6	SYNC	●
7	OUT 3 RTN (-)	○
8	OUT 3 (+)	●
9	OUT 2 RTN (-)	○

Pin No.	Function	
10	OUT 2 (+)	●
11	OUT 1 RTN (-)	○
12	OUT 1 (+)	●
13	OUT 1 (+)	●
14	VIN (+)	●
15	VIN RTN (-)	●
16	VIN RTN (-)	●
17	CHASSIS	●
18	N.C.	

Pin No.	Function	
19	OUT 3 RTN (-)	○
20	OUT 3 (+)	●
21	OUT 2 RTN (-)	○
22	OUT 2 (+)	●
23	OUT 1 RTN (-)	○
24	OUT 1 RTN (-)	○
25	OUT 1 (+)	●



Functions and Signals

INHIBIT

The **INHIBIT** signal is used to turn the power supply ON and OFF.

TTL "1" or OPEN – Power supply is ON (For normal operation, leave this pin unconnected.) TTL "0" or SHORT to **SIGNAL RTN** – Power supply is OFF.

SYNC

The **SYNC** signal is used to allow the power supply's switching frequency to sync with the system clock. The external clock's frequency can be 250 kHz \pm 10 kHz.

When this pin is left open (unconnected) the power supply will synchronize to its internal clock, set at 250 kHz \pm 10 kHz

SIGNAL RTN

The **SIGNAL RTN** is used as a return path for the **SYNC** and **INHIBIT** signals. This pin is referenced to **VIN RTN**.


CHASSIS

The **CHASSIS** pin is referenced to the device's chassis, to allow simple connection to system chassis.

* For optimal performance, connect all pins with identical designation together.

M8337 SERIES DC/DC POWER SUPPLY


Outline Draw

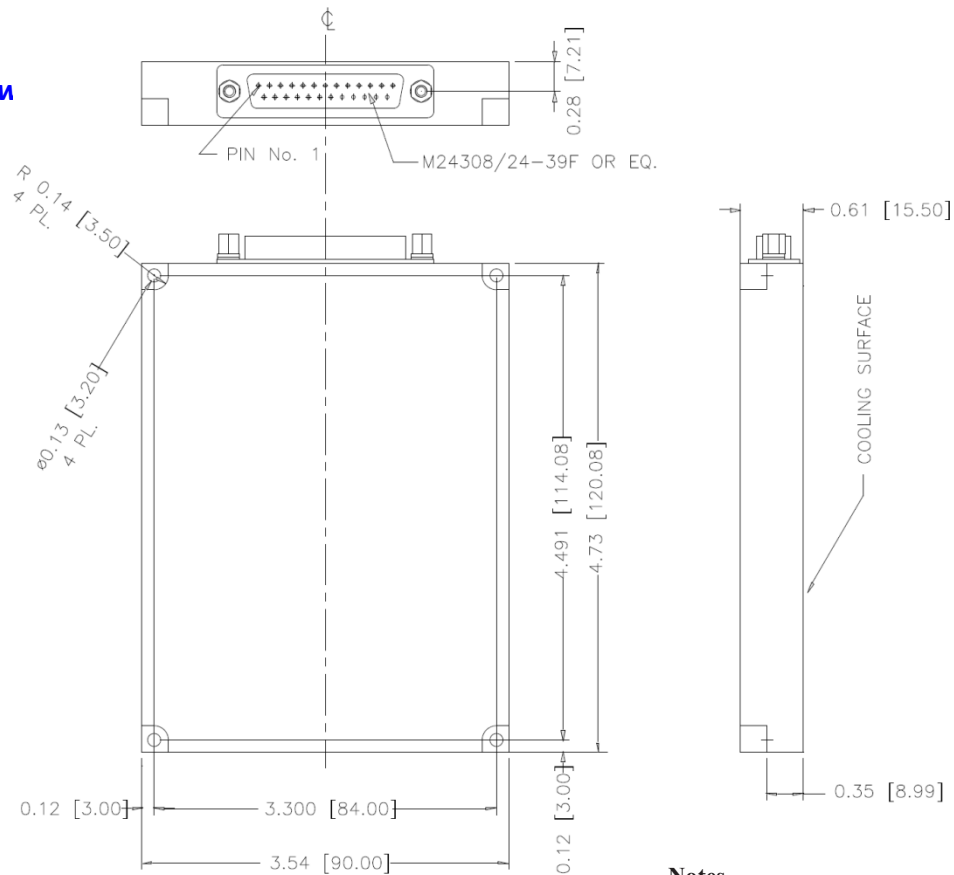

Notes

1. Dimensions are in inches [mm]
2. Tolerance is:
.XX ± 0.01 in
.XXX ± 0.005 in
3. Weight: 13.4 oz [380 g]

Heat Dissipation Surface

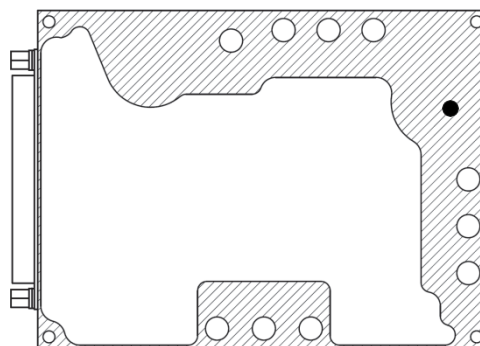

Heat Dissipation Area:
6.12 in²
[3,950 mm²]

M8337 SERIES DC/DC POWER SUPPLY

Standard Configurations

Part Number	Input	Output #1		Output #2		Output #3	
	Voltage	Voltage	Current	Voltage	Current	Voltage	Current
M8337-100	18 to 48 V _{DC}	5 V _{DC}	10 A	3.3 V _{DC}	6 A	12 V _{DC}	4 A
M8337-101	18 to 48 V _{DC}	5 V _{DC}	10 A	3.3 V _{DC}	6 A	28 V _{DC}	1.7 A
M8337-102	18 to 48 V _{DC}	5 V _{DC}	6 A	15 V _{DC}	3 A	15 V _{DC}	3 A
M8337-103	18 to 48 V _{DC}	5 V _{DC}	6 A	12 V _{DC}	4 A	12 V _{DC}	4 A
M8337-104	18 to 48 V _{DC}	15 V _{DC}	3.2 A	15 V _{DC}	3.2 A	5 V _{DC}	1.25 A

Note: Specifications are subject to change without prior notice by the manufacturer