

# MIL-DTL-5015, Matrix

CRIMP REAR RELEASE SERIES

**Amphenol**  
Aerospace



**CRIMP REAR RELEASE**

# About Amphenol® Aerospace

Your Source for Interconnect Products



## Contact Us:

Amphenol Aerospace  
40-60 Delaware Avenue  
Sidney, NY 13838-1395

## Customer Service:

Mon - Fri 8AM - 5PM  
Phone: (800) 678-0141  
Fax: (607) 563-5157  
Online: [www.amphenol-aerospace.com](http://www.amphenol-aerospace.com)



Amphenol Aerospace, Amphenol Commercial Air,  
and Amphenol Industrial Operations Main Facility in Sidney, NY USA

## About Amphenol Aerospace:

Amphenol Aerospace, a Division of Amphenol Corporation, is one of the largest manufacturers of interconnect products in the world for the Military, Commercial Aerospace and Industrial markets. Amphenol designs, manufactures and markets circular and rectangular, electronic, fiber optic, EMI/EMP filter, and a variety of special applications connectors and interconnect systems.

Our state-of-the-art facility is nestled at the foothills of the Catskill Mountains in Sidney, NY. The Amphenol complex houses many technologies including CNC machining, die-casting, molding, impact and extruding, plating, screw machining and process controls. Our fully equipped material evaluation lab and engineering organization utilize the latest in computer aided design software and analysis tools, allowing us to design, test, and qualify advanced interconnect systems. Amphenol's interconnect products are supplied to thousands of OEMs worldwide and are supported by our worldwide sales and engineering force, including the largest global network of electronic distributors.



## Customer-Centric:

Our #1 priority is our customers who deserve quality product on time.

## Accountable:

Clear owners, clear actions, clear results.

## Reliable:

What we build matters and quality is imperative.

## Enthusiastic:

Challenges create rewarding opportunities. Enthusiasm is contagious and we will spread it.



## Quality Assurance:

Amphenol Aerospace has been awarded both AS9100 - Revision C and ISO9001:2008 Quality Assurance Certifications.

# MIL-DTL-5015, Matrix®



## TABLE OF CONTENTS FOR SECTION M

|                                                                  |       |
|------------------------------------------------------------------|-------|
| Design Characteristics, Customer Options . . . . .               | 4     |
| Additional MIL-DTL-5015 connectors offered by Amphenol . . . . . | 5     |
| Insert Availability and Identification . . . . .                 | 6, 7  |
| Insert Arrangement Drawings . . . . .                            | 8-14  |
| Class Descriptions, Performance Specifications . . . . .         | 15    |
| Insert Alternate Positioning . . . . .                           | 16    |
| How to Order, Military and Commercial . . . . .                  | 17    |
| Shell Styles:                                                    |       |
| Wall mounting receptacle threaded MS3450 (9440) . . . . .        | 18    |
| Cable connecting receptacle threaded MS3451 (9441) . . . . .     | 19    |
| Box mounting receptacle threaded MS3452 (9442) . . . . .         | 20    |
| Jam nut receptacle threaded MS3454 (9444) . . . . .              | 21    |
| Straight plug threaded MS3456 (9446) . . . . .                   | 22    |
| Straight plug, self-locking threaded MS3459 (9816) . . . . .     | 23    |
| Quick disconnect plug push-pull coupling (9817/9818) . . . . .   | 24    |
| Contact information, sealing plugs, tools . . . . .              | 25    |
| Protection caps, dust caps . . . . .                             | 26-28 |

# MIL-DTL-5015 with Crimp Rear Release Contacts



**MS3450  
WALL MOUNTING  
RECEPTACLE**

**MS3451  
CABLE CONNECTING  
RECEPTACLE**

**MS3452  
BOX MOUNTING  
RECEPTACLE**



**MS3454  
JAM NUT RECEPTACLE**



**MS3456  
PLUG WITH  
THREADED COUPLING**



**MS3459  
PLUG WITH  
SELF-LOCKING  
COUPLING NUT**



**COMMERCIAL QUICK  
DISCONNECT PLUG  
WITH/WITHOUT  
LANYARD**

## AMPHENOL BROADENS THEIR MS/STANDARD FAMILY OF CONNECTORS WITH THE MIL-DTL-5015 CRIMP REAR RELEASE SERIES

This series provides an improved alternative to the older MIL-C-5015 solder type. It bridges the gap between an old connector standard and the environmental and high performance needs of current technologies.

### DESIGN CHARACTERISTICS

- Medium to heavy weight environmental cylindrical
- MS345( ) series intermateable with existing MIL-DTL-5015 solder or crimp versions on existing equipment
- Captive coupling nut mechanism, utilizes retaining rings in combination with "L" washers to prevent inadvertent disassembly
- Multiple interlock systems ensure permanent insert retention
- Positive control of dielectric separation with guaranteed ease of contact insertion
- Positive contact retention provided by a closely toleranced damage-proof metal retention clip
- Completely sealed against environmental extremes with -
  - Individual contact seals (conical risers on pin interface)
  - Interfacial seals between contacts
  - Peripheral gasket shell-to-shell seals
  - Redundant rear wire seals and insert-to-shell seals

### CUSTOMER OPTIONS

- Seven mounting styles, in shell sizes 8 to 40
- Threaded coupling or self-locking plug (MS3459) with an internal ratcheting mechanism to prevent unmating due to vibration and shock, eliminating the need for safety wiring
- Proprietary quick disconnect plug, with or without lanyard available
- Classes include aluminum or stainless steel shells, or firewall capability
- Mil-Spec and custom proprietary versions available
- Some styles are supplied to McDonnell Douglas Specification BAN 7025, DC60 Series
- Accommodation of contact sizes 0 to 16
- Over 100 insert arrangement patterns available, accommodating from a minimum of 1 to a maximum of 85 circuits
- Alternate positioning available
- High power RADSOK socket contacts available

NOTE: MIL-C-5015 is superseded to MIL-DTL-5015 for all Amphenol/Matrix rear release crimp type contacts.

# Amphenol Matrix 5015 Connector With RADSOK® Contacts

## FOR HIGH POWER APPLICATIONS



- Completely environmentally sealed with contact seals, gaskets, wire seals and insert-to-shell seals
- Special design enhanced with RADSOK contacts in the plug or receptacle instead of standard rear release crimp contacts
- All the shell styles and finishes of the Matrix 5015 family are available, including firewall styles and non-decoupling style
- Recommended for applications up to 150° operating temperature
- Up to 40% increased current carrying capability
- RADSOK contacts provide high amperage capability with minimal voltage loss and low insertion forces
- The RADSOK contact has a hyperbolic, stamped grid configuration with the socket circular. As a male pin is inserted, axial members in the female socket deflect, enabling high current flow across the connection with minimal voltage loss



**RADSOK**

| Standard Contacts |      |
|-------------------|------|
| Size              | Amps |
| 8                 | 46   |
| 4                 | 80   |
| 0                 | 150  |

| RADSOK Contacts |      |                |
|-----------------|------|----------------|
| Size            | Amps | Cartridge size |
| 8               | 70   | 3.6 MM         |
| 4               | 120  | 5.7MM          |
| 0               | 250  | 9.1MM          |

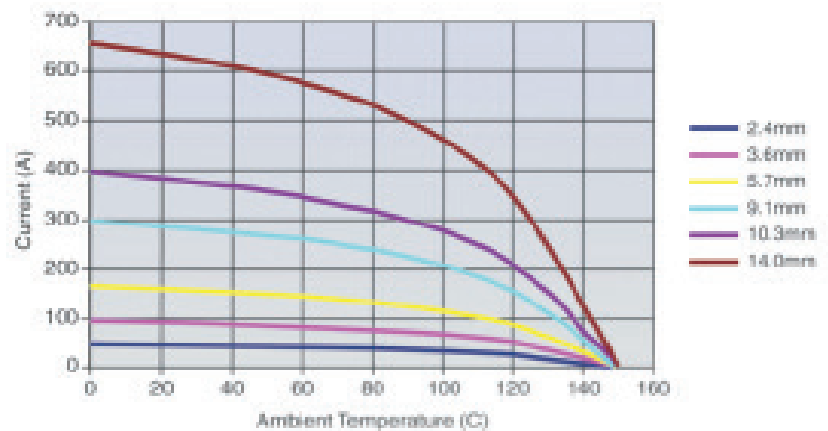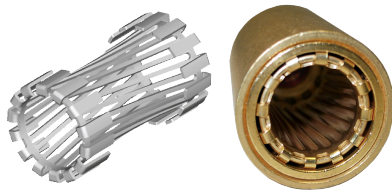

## NEW RoHS FINISHES

### BLACK ZINC NICKEL IS AMPHENOL'S 2ND RoHS COMPLIANT PLATING ALTERNATIVE TO CADMIUM

Amphenol is now offering a new RoHS compliant alternative to Cadmium. Black Zinc Nickel is a non-reflective and conductive black finish approved for 500 hrs salt spray making it an excellent choice for harsh environments. Black Zinc Nickel has been qualified by the DLA. Black Zinc Nickel is compatible with other platings and available on a wide variety of accessories.

### TRI-NICKEL ALLOY (AP-93)

Amphenol's AP-93 plating meets 1,000 hours of dynamic salt spray, combined with 500 mating cycles, and meets a 200° C temperature rating. AP-93 conforms to class 'AA' in MIL-DTL-38999 and additionally meets 360 hours of S02 corrosion resistance and is fully intermateable with cadmium.

### AMPHENOL'S DURMALON™

Durmalon, like Olive-Drab Cadmium plating (Class W), meets 500 hours of dynamic salt spray, combined with 500 mating cycles and meets specified millivolt drop shell-to-shell conductivity. Durmalon also meets a 200° C temperature rating. Durmalon has been proven to meet this requirement as well as Potassium Formate-Deicer fluid testing performed by Boeing.



**BLACK ZINC NICKLE FINISH**

# Insert Availability and Identification

| Insert Arrangement | Service Rating | Total Contacts | Contact Size |   |   |    |    | Insert Arrangement | Service Rating | Total Contacts | Contact Size |   |   |    |    |
|--------------------|----------------|----------------|--------------|---|---|----|----|--------------------|----------------|----------------|--------------|---|---|----|----|
|                    |                |                | 0            | 4 | 8 | 12 | 16 |                    |                |                | 0            | 4 | 8 | 12 | 16 |
| 8S-1               | A              | 1              |              |   |   |    | 1  | 18-24              | A/Inst.        | 10             |              |   |   |    | 10 |
| 10S-2              | A              | 1              |              |   |   |    | 1  | 18-27•             | D              | 3              |              |   |   | 2  | 1  |
| 10SL-3             | A              | 3              |              |   |   |    | 3  | 18-28•             | D              | 3              |              |   |   | 2  | 1  |
| 10SL-4             | A              | 2              |              |   |   |    | 2  | 20-2               | D              | 1              | 1            |   |   |    |    |
| 12S-1              | A              | 2              |              |   |   |    | 2  | 20-4               | D              | 4              |              |   |   | 4  |    |
| 12S-2              | A              | 2              |              |   |   |    | 2  | 20-7               | D/A            | 8              |              |   |   |    | 8  |
| 12S-3              | A              | 2              |              |   |   |    | 2  | 20-8               | Inst.          | 6              |              |   | 2 |    | 4  |
| 12S-4              | D              | 1              |              |   |   |    | 1  | 20-14              | A              | 5              |              |   | 2 | 3  |    |
| 12-5               | D              | 1              |              |   |   | 1  |    | 20-15              | A              | 7              |              |   |   | 7  |    |
| 14S-2              | Inst.          | 4              |              |   |   |    | 4  | 20-16              | A              | 9              |              |   |   | 2  | 7  |
| 14-3               | A              | 1              |              |   | 1 |    |    | 20-17              | A              | 6              |              |   |   | 5  | 1  |
| 14S-5              | Inst.          | 5              |              |   |   |    | 5  | 20-18              | A              | 9              |              |   |   | 3  | 6  |
| 14S-6              | Inst.          | 6              |              |   |   |    | 6  | 20-19              | A              | 3              |              |   | 3 |    |    |
| 14S-7              | A              | 3              |              |   |   |    | 3  | 20-21              | A              | 9              |              |   |   | 1  | 8  |
| 14S-9**            | A              | 2              |              |   |   |    | 2  | 20-22              | A              | 6              |              |   | 3 |    | 3  |
| 14S-10             | Inst.          | 4              |              |   |   |    | 4  | 20-24              | A              | 4              |              |   | 2 |    | 2  |
| 14S-11             | Inst.          | 4              |              |   |   |    | 4  | 20-27              | A              | 14             |              |   |   |    | 14 |
| 14S-12             | A              | 3              |              |   |   |    | 3  | 20-29              | A              | 17             |              |   |   |    | 17 |
| 14S-13             | A              | 3              |              |   |   |    | 3  | 20-32              | D/A            | 8              |              |   |   |    | 8  |
| 16S-1              | A              | 7              |              |   |   |    | 7  | 20-33              | A              | 11             |              |   |   |    | 11 |
| 16-2*              | E              | 1              |              |   |   | 1  |    | 22-2               | D              | 3              |              |   | 3 |    |    |
| 16S-8              | A              | 5              |              |   |   |    | 5  | 22-5               | D              | 6              |              |   |   | 2  | 4  |
| 16-9               | A              | 4              |              |   |   | 2  | 2  | 22-6*              | D              | 3              |              |   | 2 |    | 1  |
| 16-10              | A              | 3              |              |   |   | 3  |    | 22-7*              | E              | 1              | 1            |   |   |    |    |
| 16-11              | A              | 2              |              |   |   | 2  |    | 22-10*             | E              | 4              |              |   |   |    | 4  |
| 16-12              | A              | 1              |              | 1 |   |    |    | 22-11*             | B              | 2              |              |   |   |    | 2  |
| 16-13              | A              | 2              |              |   |   | 2  |    | 22-14              | A              | 19             |              |   |   |    | 19 |
| 18-1               | A/Inst.        | 10             |              |   |   |    | 10 | 22-19              | A              | 14             |              |   |   |    | 14 |
| 18-4               | D              | 4              |              |   |   |    | 4  | 22-21              | A              | 3              | 1            |   |   |    | 2  |
| 18-5 •             | D              | 3              |              |   |   | 2  | 1  | 22-22              | A              | 4              |              |   | 4 |    |    |
| 18-6*              | D              | 1              |              | 1 |   |    |    | 22-23              | D/A            | 8              |              |   |   | 8  |    |
| 18-8               | A              | 8              |              |   |   | 1  | 7  | 22-30              | A              | 19             |              |   |   |    | 19 |
| 18-9               | Inst.          | 7              |              |   |   | 2  | 5  | 22-32              | D              | 6              |              |   |   | 2  | 4  |
| 18-10**            | A              | 4              |              |   |   | 4  |    | 24-2               | D              | 7              |              |   |   | 7  |    |
| 18-11              | A              | 5              |              |   |   | 5  |    | 24-5**             | A              | 16             |              |   |   |    | 16 |
| 18-12              | A              | 6              |              |   |   |    | 6  |                    |                |                |              |   |   |    |    |
| 18-13              | A              | 4              |              |   | 1 | 3  |    |                    |                |                |              |   |   |    |    |
| 18-15              | A              | 4              |              |   |   | 4  |    |                    |                |                |              |   |   |    |    |
| 18-17              | Inst.          | 7              |              |   |   | 2  | 5  |                    |                |                |              |   |   |    |    |
| 18-18              | Inst.          | 7              |              |   |   | 2  | 5  |                    |                |                |              |   |   |    |    |
| 18-19**            | A              | 10             |              |   |   |    | 10 |                    |                |                |              |   |   |    |    |
| 18-22**            | D              | 3              |              |   |   |    | 3  |                    |                |                |              |   |   |    |    |
| 18-23              | A/Inst.        | 10             |              |   |   |    | 10 |                    |                |                |              |   |   |    |    |

\* Consult Amphenol Aerospace for availability

\*\* Inactive for new design

• Socket Only

5015

MATRIX

# Insert Availability and Identification

| Insert Arrangement | Service Rating | Total Contacts | Contact Size |   |   |    |    | Insert Arrangement                                                          | Service Rating | Total Contacts | Contact Size |   |   |    |    |
|--------------------|----------------|----------------|--------------|---|---|----|----|-----------------------------------------------------------------------------|----------------|----------------|--------------|---|---|----|----|
|                    |                |                | 0            | 4 | 8 | 12 | 16 |                                                                             |                |                | 0            | 4 | 8 | 12 | 16 |
| 24-7               | A              | 16             |              |   |   | 2  | 14 | 32-63                                                                       | D              | 5              |              | 5 |   |    |    |
| 24-10              | A              | 7              |              |   | 7 |    |    | 32-73                                                                       | A              | 46             |              |   |   |    | 46 |
| 24-11              | A              | 9              |              |   | 3 | 6  |    | 36-3                                                                        | D              | 6              | 3            |   |   | 3  |    |
| 24-12              | A              | 5              |              | 2 |   | 3  |    | 36-5                                                                        | A              | 4              | 4            |   |   |    |    |
| 24-15              | A              | 16             |              |   | 1 |    | 16 | 36-6                                                                        | A              | 6              | 2            | 4 |   |    |    |
| 24-20              | D              | 11             |              |   |   | 2  | 9  | 36-7                                                                        | A              | 47             |              |   |   | 7  | 40 |
| 24-22              | D              | 4              |              |   | 4 |    |    | 36-8                                                                        | A              | 47             |              |   |   | 1  | 46 |
| 24-24              | A              | 16             |              |   |   |    | 16 | 36-9                                                                        | A              | 31             |              | 1 | 2 | 14 | 14 |
| 24-28              | Inst.          | 24             |              |   |   |    | 24 | 36-10                                                                       | A              | 48             |              |   |   |    | 48 |
| 28-1               | D/A            | 9              |              |   | 3 | 6  |    | 36-11                                                                       | A              | 48             |              |   |   |    | 48 |
| 28-2               | D              | 14             |              |   |   | 2  | 12 | 36-12                                                                       | A              | 48             |              |   |   |    | 48 |
| 28-9               | D              | 12             |              |   |   | 6  | 6  | 36-15                                                                       | D/A            | 35             |              |   |   |    | 35 |
| 28-10              | D/A            | 7              |              | 2 | 2 | 3  |    | 36-16                                                                       | A              | 47             |              |   |   | 7  | 40 |
| 28-11              | A              | 22             |              |   |   | 4  | 18 | 36-17                                                                       | A              | 47             |              |   |   | 7  | 40 |
| 28-12              | A              | 26             |              |   |   |    | 26 | 36-18                                                                       | A              | 31             |              | 1 | 2 | 14 | 14 |
| 28-13              | A              | 26             |              |   |   |    | 26 | 36-21                                                                       | A              | 31             |              | 1 | 2 | 14 | 14 |
| 28-15              | A              | 35             |              |   |   |    | 35 | 36-52                                                                       | A              | 52             |              |   |   |    | 52 |
| 28-17              | B/D/A          | 15             |              |   |   |    | 15 | 40-1                                                                        | D              | 30             |              |   |   | 6  | 24 |
| 28-19*             | B/D/A          | 10             |              |   |   | 4  | 6  | 40-9                                                                        | A              | 47             |              |   | 1 | 22 | 24 |
| 28-20              | A              | 14             |              |   |   | 10 | 4  | 40-56                                                                       | A              | 85             |              |   |   |    | 85 |
| 28-21              | A              | 37             |              |   |   |    | 37 | * Consult Amphenol Aerospace for availability<br>** Inactive for new design |                |                |              |   |   |    |    |
| 28-22              | D              | 6              |              | 3 |   |    | 3  |                                                                             |                |                |              |   |   |    |    |
| 32-1               | E/D            | 5              | 2            |   |   | 3  |    |                                                                             |                |                |              |   |   |    |    |
| 32-6               | A              | 23             |              | 2 | 3 | 2  | 16 |                                                                             |                |                |              |   |   |    |    |
| 32-7               | Inst./A        | 35             |              |   |   | 7  | 28 |                                                                             |                |                |              |   |   |    |    |
| 32-9               | D              | 14             |              | 2 |   |    | 12 |                                                                             |                |                |              |   |   |    |    |
| 32-13              | D              | 23             |              |   |   | 5  | 18 |                                                                             |                |                |              |   |   |    |    |
| 32-15              | D              | 8              | 2            |   |   | 6  |    |                                                                             |                |                |              |   |   |    |    |
| 32-16              | A              | 23             |              | 2 | 3 | 2  | 16 |                                                                             |                |                |              |   |   |    |    |
| 32-17              | D              | 4              |              | 4 |   |    |    |                                                                             |                |                |              |   |   |    |    |
| 32-19              | E/D            | 5              | 2            |   |   | 3  |    |                                                                             |                |                |              |   |   |    |    |

# Insert Arrangements


Front Face of Pin Insert or Rear Face of Socket Insert Illustrated



| Insert Arrangement | 8S-1 | 10S-2 | 10SL-3 | 10SL-4 | 12S-1 | 12S-2 | 12S-3 |
|--------------------|------|-------|--------|--------|-------|-------|-------|
| Service Rating     | A    | A     | A***   | A      | A     | A     | A     |
| Number of Contacts | 1    | 1     | 3      | 2      | 2     | 2     | 2     |
| Contact Size       | 16   | 16    | 16     | 16     | 16    | 16    | 16    |




| Insert Arrangement | 12S-4 | 12-5 | 14S-2 | 14-3 | 14S-5 | 14S-6 |
|--------------------|-------|------|-------|------|-------|-------|
| Service Rating     | D     | D    | Inst. | A    | Inst. | Inst. |
| Number of Contacts | 1     | 1    | 4     | 1    | 5     | 6     |
| Contact Size       | 16    | 12   | 16    | 8    | 16    | 16    |

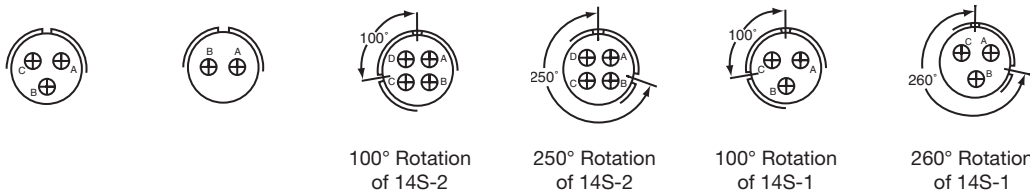

| Insert Arrangement | 14S-7 | 14S-9** | 14S-10 | 14S-11 | 14S-12 | 14S-13 |
|--------------------|-------|---------|--------|--------|--------|--------|
| Service Rating     | A     | A       | Inst.  | Inst.  | A      | A      |
| Number of Contacts | 3     | 2       | 4      | 4      | 3      | 3      |
| Contact Size       | 16    | 16      | 16     | 16     | 16     | 16     |




| Insert Arrangement | 16S-1 | 16-2* | 16S-8 | 16-9 | 16-10 | 16-11 |
|--------------------|-------|-------|-------|------|-------|-------|
| Service Rating     | A     | E     | A     | A    | A     | A     |
| Number of Contacts | 7     | 1     | 5     | 2    | 3     | 2     |
| Contact Size       | 16    | 12    | 16    | 12   | 12    | 12    |

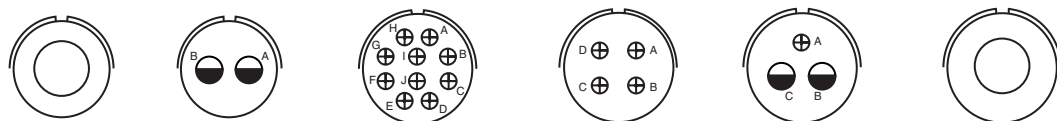

| Insert Arrangement | 16-12 | 16-13 | 18-1                            | 18-4 | 18-5 • | 18-6* |
|--------------------|-------|-------|---------------------------------|------|--------|-------|
| Service Rating     | A     | A     | B, C, F, G = A;<br>Bal. = Inst. | D    | D      | D     |
| Number of Contacts | 1     | 2†    | 10                              | 4    | 2      | 1     |
| Contact Size       | 4     | 12    | 16                              | 16   | 12     | 4     |


- \* Consult Amphenol Aerospace for availability.
- \*\* Inactive for new design
- \*\*\* Service rating Inst. Class K
- Socket only
- † One Iron contact and one Constantan contact

## CONTACT LEGEND




# Insert Arrangements


Front Face of Pin Insert or Rear Face of Socket Insert Illustrated

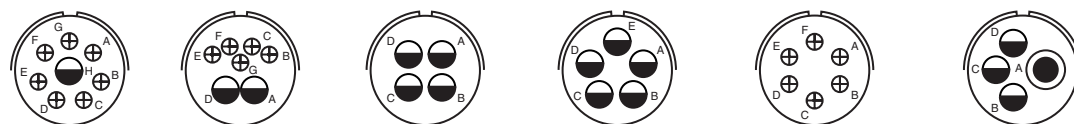


| Insert Arrangement | 18-8* |    | 18-9  |    | 18-10** |  | 18-11 |  | 18-12 |  | 18-13 |    |
|--------------------|-------|----|-------|----|---------|--|-------|--|-------|--|-------|----|
| Service Rating     | A     |    | Inst. |    | A       |  | A     |  | A     |  | A     |    |
| Number of Contacts | 1     | 7  | 2     | 5  | 4       |  | 5     |  | 6     |  | 1     | 3  |
| Contact Size       | 12    | 16 | 12    | 16 | 12      |  | 12    |  | 16    |  | 8     | 12 |

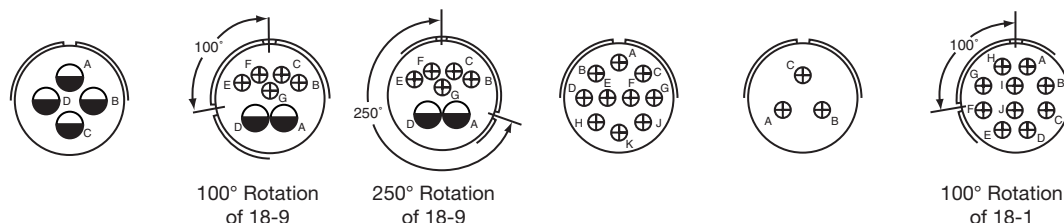

| Insert Arrangement | 18-15 |  | 18-17 |    | 18-18 |    | 18-19** |  | 18-22** |  | 18-23                        |  |
|--------------------|-------|--|-------|----|-------|----|---------|--|---------|--|------------------------------|--|
| Service Rating     | A     |  | Inst. |    | Inst. |    | A       |  | D       |  | B, C, F, G = A; Bal. = Inst. |  |
| Number of Contacts | 4††   |  | 2     | 5  | 2     | 5  | 10      |  | 3       |  | 10                           |  |
| Contact Size       | 12    |  | 12    | 16 | 12    | 16 | 16      |  | 16      |  | 16                           |  |

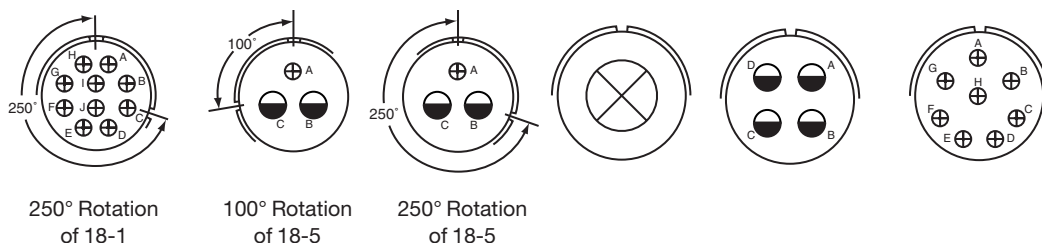

| Insert Arrangement | 18-24                        |  | 18-27 • |    | 18-28 • |    | 20-2 |  | 20-4 |  | 20-7                           |  |
|--------------------|------------------------------|--|---------|----|---------|----|------|--|------|--|--------------------------------|--|
| Service Rating     | B, C, F, G = A; Bal. = Inst. |  | D       |    | D       |    | D    |  | D    |  | A, B, G, H = D; C, D, E, F = A |  |
| Number of Contacts | 10                           |  | 2       | 1  | 2       | 1  | 1    |  | 4    |  | 8                              |  |
| Contact Size       | 16                           |  | 12      | 16 | 12      | 16 | 0    |  | 12   |  | 16                             |  |

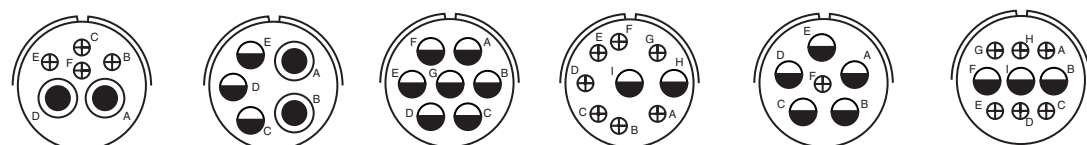

| Insert Arrangement | 20-8* |    | 20-14 |    | 20-15 |  | 20-16 |    | 20-17 |    | 20-18 |    |
|--------------------|-------|----|-------|----|-------|--|-------|----|-------|----|-------|----|
| Service Rating     | Inst. |    | A     |    | A     |  | A     |    | A     |    | A     |    |
| Number of Contacts | 2     | 4  | 2     | 3  | 7     |  | 2     | 7  | 5     | 1  | 3     | 6  |
| Contact Size       | 8     | 16 | 8     | 12 | 12    |  | 12    | 16 | 12    | 16 | 12    | 16 |


\* Consult Amphenol Aerospace for availability.

\*\* Inactive for new design

• Socket only


†† A, C = Iron; B, D = Constantan

## CONTACT LEGEND




# Insert Arrangements

Front Face of Pin Insert or Rear Face of Socket Insert Illustrated

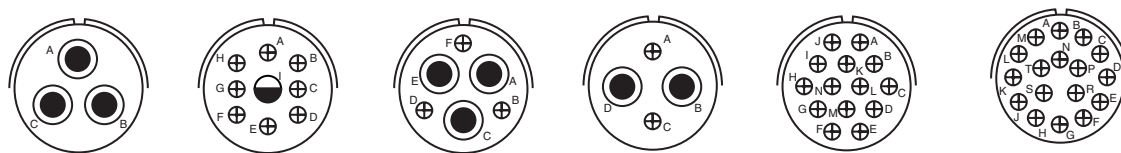


| Insert Arrangement | 20-19 | 20-21 | 20-22 | 20-24 | 20-27 | 20-29 |
|--------------------|-------|-------|-------|-------|-------|-------|
| Service Rating     | A     | A     | A     | A     | A     | A     |
| Number of Contacts | 3     | 1 8   | 3 3   | 2 2   | 14    | 17    |
| Contact Size       | 8     | 12 16 | 8 16  | 8 16  | 16    | 16    |

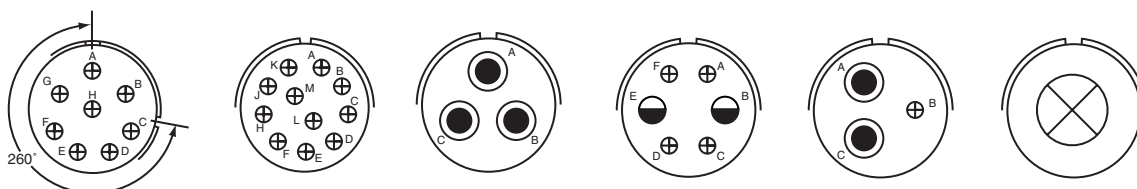


260° Rotation of 20-7

| Insert Arrangement | 20-32                    | 20-33 | 22-2 | 22-5  | 22-6** | 22-7* |
|--------------------|--------------------------|-------|------|-------|--------|-------|
| Service Rating     | A, B, G, H = D; Bal. = A | A     | D    | D     | D      | E     |
| Number of Contacts | 8                        | 11    | 3    | 2 4   | 2 1    | 1     |
| Contact Size       | 16                       | 16    | 8    | 12 16 | 8 16   | 0     |

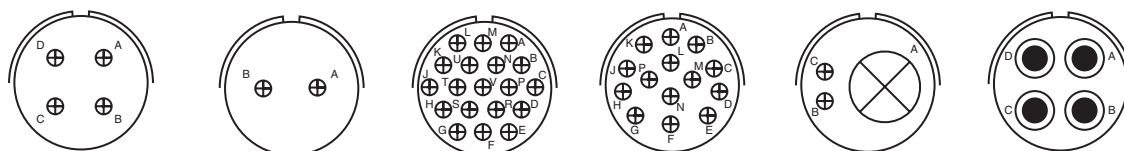

| Insert Arrangement | 22-10* | 22-11* | 22-14 | 22-19 | 22-21 | 22-22 |
|--------------------|--------|--------|-------|-------|-------|-------|
| Service Rating     | E      | B      | A     | A     | A     | A     |
| Number of Contacts | 4      | 2      | 19    | 14    | 1 2   | 4     |
| Contact Size       | 16     | 16     | 16    | 16    | 0 16  | 8     |

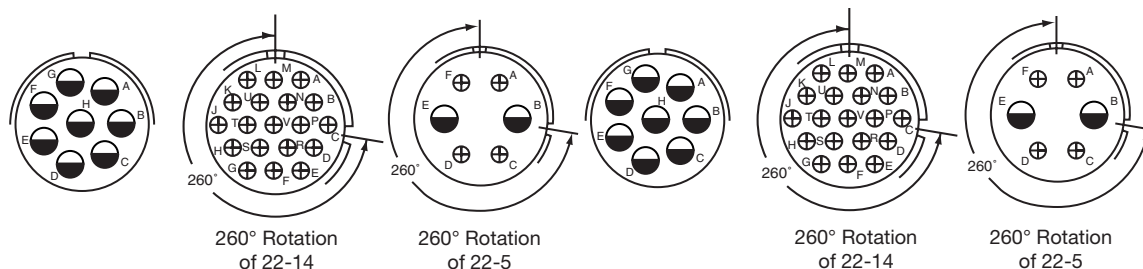


| Insert Arrangement | 22-23           | 22-30 | 22-32 | 22-23           | 22-30 | 22-32 |
|--------------------|-----------------|-------|-------|-----------------|-------|-------|
| Service Rating     | H = D; Bal. = A | A     | D     | H = D; Bal. = A | A     | D     |
| Number of Contacts | 8               | 19    | 2 4   | 8               | 19    | 2 4   |
| Contact Size       | 12              | 16    | 12 16 | 12              | 16    | 12 16 |

\*Consult Amphenol Aerospace for availability.


\*\* Inactive for new design

## CONTACT LEGEND




# Insert Arrangements


Front Face of Pin Insert or Rear Face of Socket Insert Illustrated

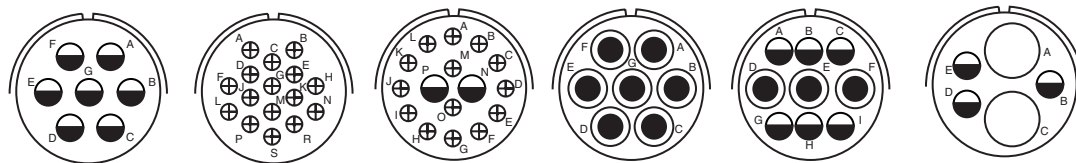


| Insert Arrangement | 24-2 | 24-5** | 24-7    | 24-10 | 24-11  | 24-12  |
|--------------------|------|--------|---------|-------|--------|--------|
| Service Rating     | D    | A      | A       | A     | A      | A      |
| Number of Contacts | 7    | 16     | 2   14  | 7     | 3   6  | 2   3  |
| Contact Size       | 12   | 16     | 12   16 | 8     | 8   12 | 4   12 |

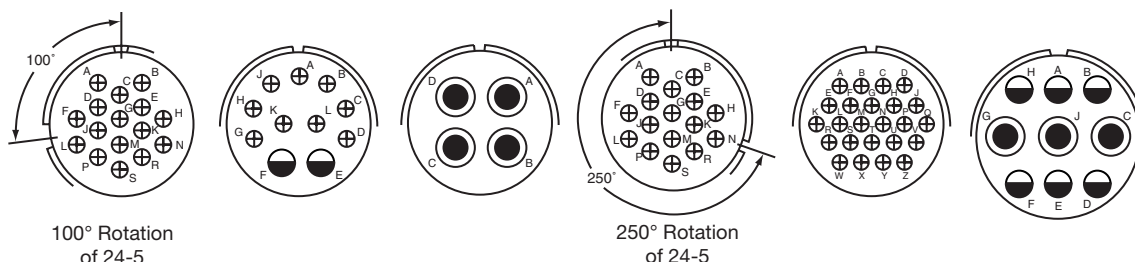

| Insert Arrangement | 24-15  | 24-20   | 24-22 | 24-24 | 24-28 | 28-1                     |
|--------------------|--------|---------|-------|-------|-------|--------------------------|
| Service Rating     | A      | D       | D     | A     | Inst. | A, J, E = D;<br>Bal. = A |
| Number of Contacts | 16   1 | 9   2   | 4     | 16    | 24    | 6   3                    |
| Contact Size       | 16   8 | 16   12 | 8     | 16    | 16    | 12   8                   |

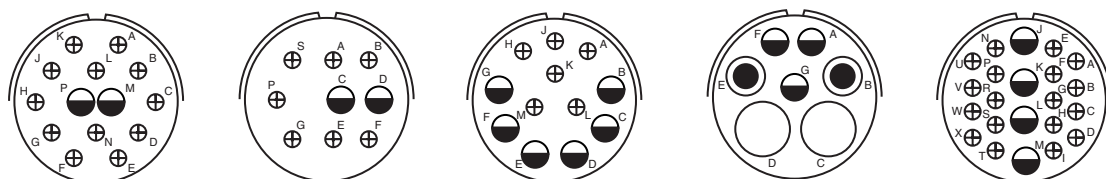

| Insert Arrangement | 28-2    | 28-4*                 | 28-9    | 28-10           | 28-11   |
|--------------------|---------|-----------------------|---------|-----------------|---------|
| Service Rating     | D       | G, P, S = E; Bal. = D | D       | G = D, Bal. = A | A       |
| Number of Contacts | 2   12  | 2   7                 | 6   6   | 2   2   3       | 4   18  |
| Contact Size       | 12   16 | 12   16               | 12   16 | 4   8   12      | 12   16 |

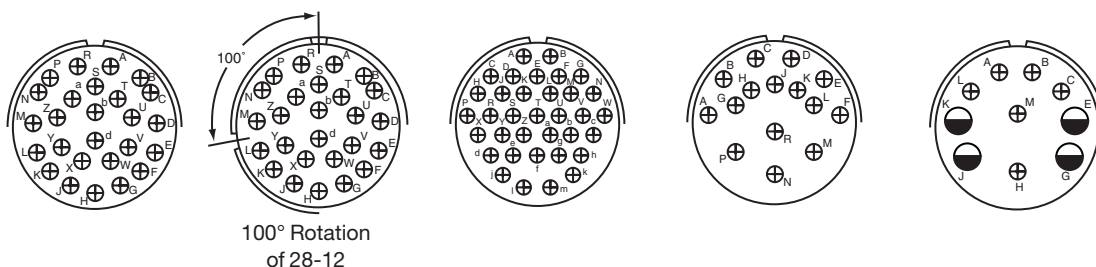


| Insert Arrangement | 28-12 | 28-13 | 28-15 | 28-17                           | 28-19*                          |
|--------------------|-------|-------|-------|---------------------------------|---------------------------------|
| Service Rating     | A     | A     | A     | R = B; M, N, P = D;<br>Bal. = A | H, M = B; A, B = D;<br>Bal. = A |
| Number of Contacts | 26    | 26    | 35    | 15                              | 4   6                           |
| Contact Size       | 16    | 16    | 16    | 16                              | 12   16                         |

\*Consult Amphenol Aerospace for availability.


\*\* Inactive for new design

## CONTACT LEGEND




# Insert Arrangements


Front Face of Pin Insert or Rear Face of Socket Insert Illustrated

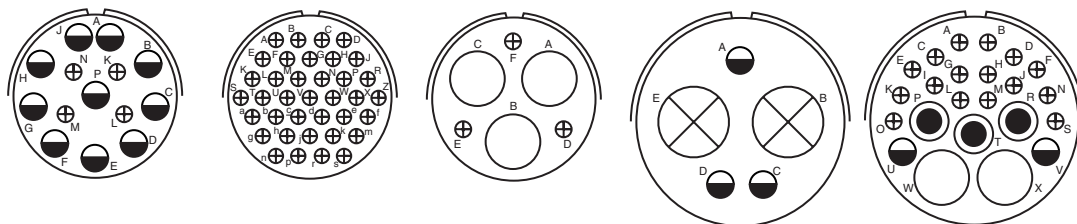


| Insert Arrangement | 28-20 |    | 28-21 |  | 28-22 |    | 32-1                  |    | 32-6 |   |    |    |
|--------------------|-------|----|-------|--|-------|----|-----------------------|----|------|---|----|----|
| Service Rating     | A     |    | A     |  | D     |    | A = E; B, C, D, E = D |    | A    |   |    |    |
| Number of Contacts | 10    | 4  | 37    |  | 3     | 3  | 2                     | 3  | 2    | 3 | 2  | 16 |
| Contact Size       | 12    | 16 | 16    |  | 4     | 16 | 0                     | 12 | 4    | 8 | 12 | 16 |

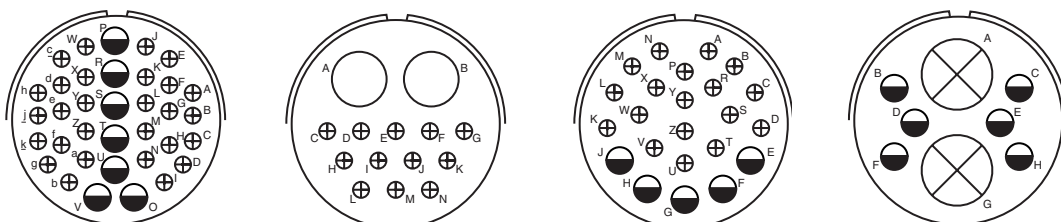



| Insert Arrangement | 32-7                         |    | 32-9 |    | 32-13 |    | 32-15 |    |
|--------------------|------------------------------|----|------|----|-------|----|-------|----|
| Service Rating     | A, B, h, j = Inst.; Bal. = A |    | D    |    | D     |    | D     |    |
| Number of Contacts | 7                            | 28 | 2    | 12 | 5     | 18 | 2     | 6  |
| Contact Size       | 12                           | 16 | 4    | 16 | 12    | 16 | 0     | 12 |




100° Rotation  
of 32-6



260° Rotation  
of 32-1




| Insert Arrangement | 32-16 |   |    |    | 32-17 |  | 32-19           |    | 32-63 |  |  |  |
|--------------------|-------|---|----|----|-------|--|-----------------|----|-------|--|--|--|
| Service Rating     | A     |   |    |    | D     |  | A = E, Bal. = D |    | D     |  |  |  |
| Number of Contacts | 2     | 3 | 2  | 16 | 4     |  | 2               | 3  | 5     |  |  |  |
| Contact Size       | 4     | 8 | 12 | 16 | 4     |  | 0               | 12 | 4     |  |  |  |




# Insert Arrangements


Front Face of Pin Insert or Rear Face of Socket Insert Illustrated

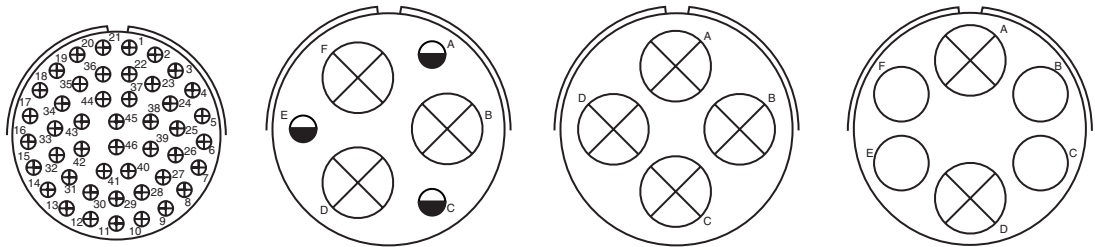

| Insert Arrangement | 32-73 | 36-3 |    | 36-5 | 36-6 |   |
|--------------------|-------|------|----|------|------|---|
| Service Rating     | A     | D    |    | A    | A    |   |
| Number of Contacts | 46    | 3    | 3  | 4    | 2    | 4 |
| Contact Size       | 16    | 0    | 12 | 0    | 0    | 4 |

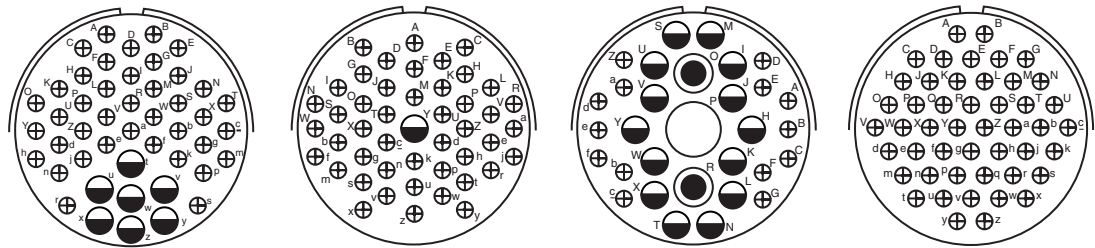


| Insert Arrangement | 36-7 |    | 36-8 |    | 36-9 |   |    |    | 36-10 |
|--------------------|------|----|------|----|------|---|----|----|-------|
| Service Rating     | A    |    | A    |    | A    |   |    |    | A     |
| Number of Contacts | 7    | 40 | 1    | 46 | 1    | 2 | 14 | 14 | 48    |
| Contact Size       | 12   | 16 | 12   | 16 | 4    | 8 | 12 | 16 | 16    |

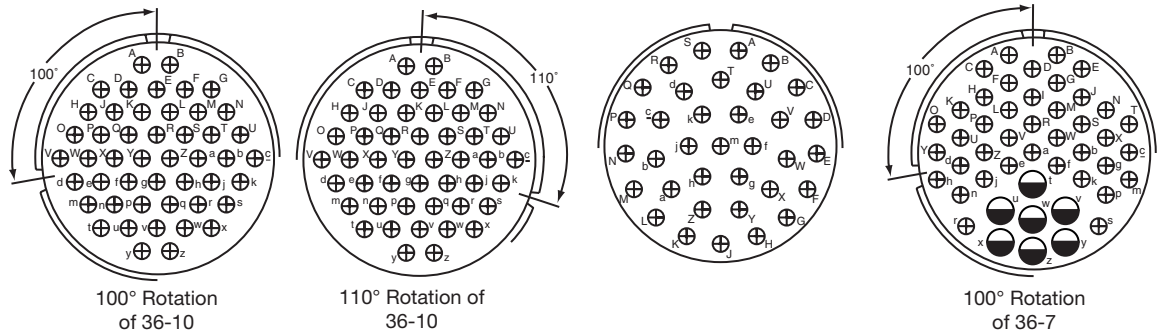

| Insert Arrangement | 36-11 | 36-12 | 36-15           | 36-16 |    |
|--------------------|-------|-------|-----------------|-------|----|
| Service Rating     | A     | A     | M = D, Bal. = A | A     |    |
| Number of Contacts | 48    | 48    | 35              | 7     | 40 |
| Contact Size       | 16    | 16    | 16              | 12    | 16 |


CONTACT LEGEND




# Insert Arrangements

Front Face of Pin Insert or Rear Face of Socket Insert Illustrated

110° Rotation of  
36-7

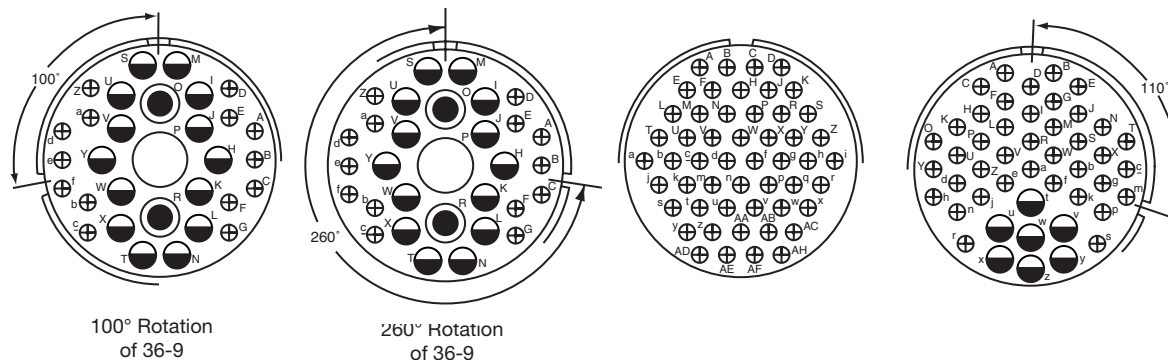


| Insert Arrangement | 36-18 |   |    |    | 36-21 |   |    |    | 36-52 |  | 36-17 |    |
|--------------------|-------|---|----|----|-------|---|----|----|-------|--|-------|----|
| Service Rating     | A     |   |    |    | A     |   |    |    | A     |  | A     |    |
| Number of Contacts | 1     | 2 | 14 | 14 | 1     | 2 | 14 | 14 | 52    |  | 7     | 40 |
| Contact Size       | 4     | 8 | 12 | 16 | 4     | 8 | 12 | 16 | 16    |  | 12    | 16 |

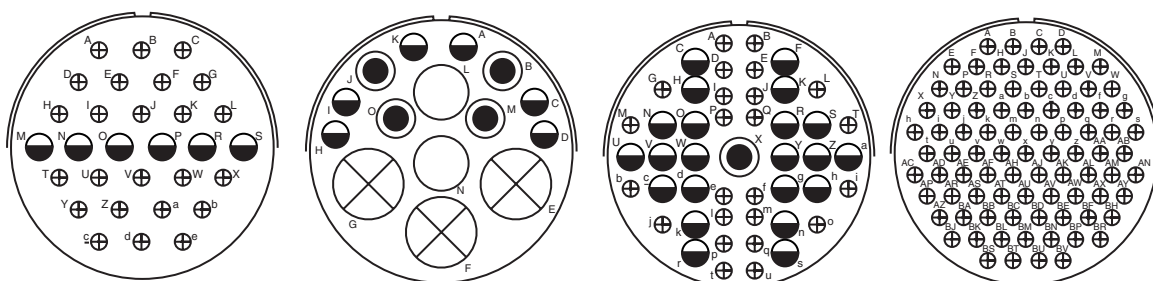

| Insert Arrangement | 40-1 |    | 40-5* |   |   |   | 40-9 |    |    | 40-56 |
|--------------------|------|----|-------|---|---|---|------|----|----|-------|
| Service Rating     | D    |    | A     |   |   |   | A    |    |    | A     |
| Number of Contacts | 6    | 24 | 3     | 2 | 4 | 6 | 1    | 22 | 24 | 85    |
| Contact Size       | 12   | 16 | 0     | 4 | 8 | 2 | 6    | 12 | 16 | 16    |

\* Consult Amphenol Aerospace for availability.

## CONTACT LEGEND



## CLASS DESCRIPTIONS

| MILITARY MIL-DTL-5015 |                                                                                                            | AMPHENOL/MATRIX |                                                                                                            |
|-----------------------|------------------------------------------------------------------------------------------------------------|-----------------|------------------------------------------------------------------------------------------------------------|
| Class L*              | Aluminum shell, electroless nickel finish, fluid resistant insert                                          | Class A         | Aluminum shell, black anodize finish, fluid resistant insert                                               |
| Class W               | Aluminum shell, cadmium olive drab finish, fluid resistant insert                                          | Class F         | Aluminum shell, electroless nickel finish, fluid resistant insert                                          |
| Class LS              | Stainless steel shell, passivated, fluid resistant insert                                                  | Class W         | Aluminum shell, cadmium/olive drab finish, fluid resistant insert                                          |
| Class KT**            | Firewall, steel shell, cadmium olive drab finish, non-flammable hard dielectric and fluid resistant insert | Class FS        | Stainless steel shell, passivated, fluid resistant insert                                                  |
| Class KS              | Firewall, stainless steel shell, passivated, non-flammable hard dielectric and fluid resistant insert      | Class KT        | Firewall, steel shell, cadmium olive drab finish, non-flammable hard dielectric and fluid resistant insert |
|                       |                                                                                                            | Class KS        | Firewall, stainless steel shell, passivated, non-flammable hard dielectric and fluid resistant insert      |
|                       |                                                                                                            | Class AB        | Marine Bronze: 2,000 hr. salt spray, -65dB@10GHz                                                           |
|                       |                                                                                                            | Class DS        | AP-93 Tri-Nickel Alloy, Aluminum, 1000 Hr., 200°C, -65dB@100Hz*                                            |
|                       |                                                                                                            | Class DT        | Aluminum shell, Durmalon (Nickel PTFE)                                                                     |
|                       |                                                                                                            | Class DZ        | Aluminum shell, Black Zinc Nickel*                                                                         |

\* Class L inactivates older Class U (aluminum, electroless nickel)

\*\* Class KT (ferrous alloy, cadmium/olive drab) inactivates older Class K (ferrous alloy, electroless nickel)

## PERFORMANCE SPECIFICATIONS

| VOLTAGE RATING |       |      |      |      |      |      |
|----------------|-------|------|------|------|------|------|
| Altitude       | Inst. | A    | D    | E    | B    | C    |
| Sea Level      | 1000  | 2000 | 2800 | 3500 | 4500 | 7000 |
| 50,000 ft.     | 400   | 600  | 675  | 750  | 825  | 975  |
| 70,000 ft.     | 260   | 360  | 400  | 440  | 480  | 560  |
| 110,000 ft.    | 200   | 200  | 200  | 200  | 200  | 200  |

### SHOCK

Wired, mated connectors are subjected to one shock in each of three mutually perpendicular axes with pulse of an approximate half sine wave of 50g magnitude for a duration of 11 milliseconds. All contacts wired in series circuit with 100 ±10 Milliampere of current flow.

### OPERATING TEMPERATURE RANGE

Classes L, LS and KS have temperature range of

-55°C (-75°F) to 200°C (392°F)

Classes W and KT have temperature range of

-55°C (-75°F) to 175°C (347°F)

### ENVIRONMENTAL SEAL

Wired, mated connectors with the specified accessory attached will meet the altitude immersion test specified in MIL-DTL-5015.

### DURABILITY


Minimum of 100 mating cycles.

# Insert Alternate Positioning

To avoid cross-plugging problems in applications requiring the use of more than one connector of the same size and arrangement, alternate rotations are available as indicated in the accompanying charts.

As shown in the diagram below, the front face of the pin insert is rotated within the shell in a clockwise direction from the normal shell key. The socket insert would be rotated counter-clockwise the same number of degrees in respect to the normal shell key.

The charts give the W, X, Y, Z positions for the alternate rotations available for the insert arrangements of the rear release MIL-DTL-5015 series of connectors. If an insert arrangement number is not given, then there is no available alternate rotation for that pattern.

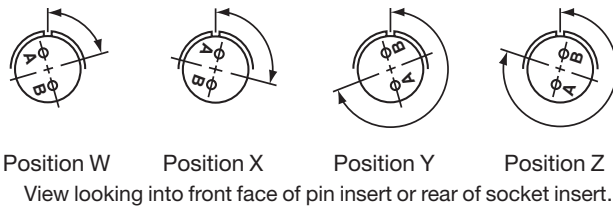

The following insert arrangements have the same alternate insert rotations for W, X, Y and Z, which are:

| Degrees |     |     |     |
|---------|-----|-----|-----|
| W       | X   | Y   | Z   |
| 80      | 110 | 250 | 280 |

|       |       |       |       |       |       |
|-------|-------|-------|-------|-------|-------|
| 16-7  | 20-22 | 24-4  | 28-4  | 28-21 | 40-3  |
| 18-5  | 22-6  | 24-5  | 28-8  | 32-1  | 40-4  |
| 18-9  | 22-12 | 24-6  | 28-9  | 32-3  | 40-5  |
| 18-13 | 22-14 | 24-7  | 28-10 | 32-6  | 40-6  |
| 18-14 | 22-15 | 24-12 | 28-11 | 32-9  | 40-7  |
| 20-7  | 22-17 | 24-16 | 28-15 | 32-13 | 40-11 |
| 20-8  | 22-18 | 24-20 | 28-16 | 32-22 |       |
| 20-9  | 22-19 | 24-21 | 28-17 | 36-7  |       |
| 20-14 | 22-21 | 24-28 | 28-19 | 36-8  |       |
| 20-16 | 24-1  | 28-1  | 28-20 | 40-2  |       |

| Insert Arrangement | Degrees |     |     |     |
|--------------------|---------|-----|-----|-----|
|                    | W       | X   | Y   | Z   |
| 12S-3              | 70      | 145 | 215 | 290 |
| 14S-2              | -       | 120 | 240 | -   |
| 14S-5              | -       | 110 | -   | -   |
| 14S-7              | 90      | 180 | 270 | -   |
| 14S-9              | 70      | 145 | 215 | 290 |
| 16S-1              | 80      | -   | -   | 280 |
| 16S-4              | 35      | 110 | 250 | 325 |
| 16S-8              | -       | 170 | 265 | -   |
| 16-9               | 35      | 110 | 250 | 325 |
| 16-10              | 90      | 180 | 270 | -   |
| 16-11              | 35      | 110 | 250 | 325 |
| 16-13              | 35      | 110 | 250 | 325 |
| 18-1               | 70      | 145 | 215 | 290 |
| 18-4               | 35      | 110 | 250 | 325 |
| 18-8               | 70      | -   | -   | 290 |
| 18-10              | -       | 120 | 240 | -   |
| 18-11              | -       | 170 | 265 | -   |
| 18-12              | 80      | -   | -   | 280 |
| 18-15              | -       | 120 | 240 | -   |
| 18-19              | -       | 120 | 240 | -   |
| 18-22              | 70      | 145 | 215 | 290 |
| 20-4               | 45      | 110 | 250 | -   |
| 20-15              | 80      | -   | -   | 280 |

| Insert Arrangement | Degrees |     |     |     |
|--------------------|---------|-----|-----|-----|
|                    | W       | X   | Y   | Z   |
| 20-17              | 90      | 180 | 270 | -   |
| 20-18              | 35      | 110 | 250 | 325 |
| 20-19              | 90      | 180 | 270 | -   |
| 20-21              | 35      | 110 | 250 | 325 |
| 20-24              | 35      | 110 | 250 | 325 |
| 20-27              | 35      | 110 | 250 | 325 |
| 20-29              | 80      | -   | -   | 280 |
| 22-2               | 70      | 145 | 215 | 290 |
| 22-4               | 35      | 110 | 250 | 325 |
| 22-5               | 35      | 110 | 250 | 325 |
| 22-9               | 70      | 145 | 215 | 290 |
| 22-10              | 35      | 110 | 250 | 325 |
| 22-11              | 35      | 110 | 250 | 325 |
| 22-22              | -       | 110 | 250 | -   |
| 22-23              | 35      | -   | 250 | -   |
| 22-27              | 80      | -   | 250 | 280 |
| 22-36              | 90      | -   | 270 | -   |
| 24-2               | 80      | -   | -   | 280 |
| 24-10              | 80      | -   | -   | 280 |
| 24-11              | 35      | 110 | 250 | 325 |
| 24-22              | 45      | 110 | 250 | -   |
| 24-27              | 80      | -   | -   | 280 |
| 24-80              | 35      | 145 | 240 | 300 |

| Insert Arrangement | Degrees |     |     |     |
|--------------------|---------|-----|-----|-----|
|                    | W       | X   | Y   | Z   |
| 28-2               | 35      | 110 | 250 | 325 |
| 28-3               | 70      | 145 | 215 | 290 |
| 28-5               | 35      | 110 | 250 | 325 |
| 28-12              | 90      | 180 | 270 | -   |
| 28-18              | 70      | 145 | 215 | 290 |
| 28-22              | 70      | 145 | 215 | 290 |
| 32-2               | 70      | 145 | 215 | 290 |
| 32-7               | 80      | 125 | 235 | 280 |
| 32-15              | 35      | 110 | 250 | 280 |
| 32-17              | 45      | 110 | 250 | -   |
| 32-73              | 36      | -   | -   | -   |
| 36-3               | 70      | 145 | 215 | 290 |
| 36-5               | -       | 120 | 240 | -   |
| 36-6               | 35      | 110 | 250 | 325 |
| 36-9               | 80      | 125 | 235 | 280 |
| 36-10              | 80      | 125 | 235 | 280 |
| 36-15              | 60      | 125 | 245 | 305 |
| 36-52              | 72      | 144 | 216 | 288 |
| 36-66              | 110     | 250 | 260 | 280 |
| 40-1               | 65      | 130 | 235 | 300 |
| 40-9               | 65      | 125 | 225 | 310 |
| 40-10              | 65      | 125 | 255 | 310 |
| 40-56              | 72      | 144 | 216 | 288 |
| 40-62              | 30      | 130 | 220 | 290 |

|                                               | 1.             | 2.          | 3.            | 4.                            | 5.            | 6.                  | 7.                  |
|-----------------------------------------------|----------------|-------------|---------------|-------------------------------|---------------|---------------------|---------------------|
| MIL-DTL-5015 with rear release crimp contacts | Connector Type | Shell Style | Service class | Shell Size–Insert Arrangement | Contact Types | Alternate Positions | Modification Number |
| MILITARY                                      | MS             | 3456        | L             | 16S–8                         | P             | W                   | NA                  |
| COMMERCIAL                                    | 944            | 6           | F             | 16S–8                         | P             | W                   | (XXX)               |

## 1. MILITARY CONNECTORY TYPE

**MS** Designates Military Standard

## 2. SHELL STYLE - THREADED COUPLING

|             |                                              |
|-------------|----------------------------------------------|
| <b>3450</b> | Wall mounting receptacle                     |
| <b>3451</b> | Cable connecting receptacle                  |
| <b>3452</b> | Box mounting receptacle                      |
| <b>3454</b> | Jam nut receptacle                           |
| <b>3456</b> | Straight plug                                |
| <b>3459</b> | Straight plug with self-locking coupling nut |

## 3. SERVICE CLASS

|           |                                                                   |
|-----------|-------------------------------------------------------------------|
| <b>L</b>  | Aluminum shell, electroless nickel finish, fluid resistant insert |
| <b>W</b>  | Aluminum shell, cadmium olive drab finish, fluid resistant insert |
| <b>LS</b> | Stainless steel shell, passivated, fluid resistant insert         |

### FIREWALL STYLES ONLY AVAILABLE FOR 3450, 3456, 3459 PER MIL SPEC:

|           |                                                                                                            |
|-----------|------------------------------------------------------------------------------------------------------------|
| <b>KT</b> | Firewall, steel shell, cadmium/olive drab finish, non-flammable hard dielectric and fluid resistant insert |
| <b>KS</b> | Firewall, stainless steel shell, passivated, non-flammable hard dielectric and fluid resistant insert      |

Note: Class L inactivates older Class U.

Class K is inactive and has been replaced by Class KT for all applications.

## 4. SHELL SIZE & INSERT ARRANGEMENT SEE PAGES 3-13

First number represents Shell Size,  
second number is the Insert Arrangement.

## 5. CONTACT TYPE

|          |              |
|----------|--------------|
| <b>P</b> | Pin          |
| <b>S</b> | Socket       |
| <b>A</b> | Less pins    |
| <b>B</b> | Less sockets |

## 6. ALTERNATE POSITIONS

“W”, “X”, “Y”, “Z” designate that insert is rotated in its shell from normal position. No letter required for normal (no rotation) position. See page 16 for description of alternate positions.

## 1. COMMERCIAL CONNECTOR TYPE

**944** Designates Amphenol/Matrix Commercial Series

**981** Designates self locking/Quick disconnect (+)(-) lanyard

## 2. SHELL STYLE - THREADED COUPLING

|          |                             |
|----------|-----------------------------|
| <b>0</b> | Wall mounting receptacle    |
| <b>1</b> | Cable connecting receptacle |
| <b>2</b> | Box mounting receptacle     |
| <b>4</b> | Jam nut receptacle          |
| <b>6</b> | Straight plug               |

## 2. SELF LOCKING/QUICK DISCONNECT (981)

|          |                                              |
|----------|----------------------------------------------|
| <b>6</b> | Straight plug with self-locking coupling nut |
| <b>7</b> | Quick disconnect plug with lanyard           |
| <b>8</b> | Quick disconnect plug without lanyard        |

## 3. SERVICE CLASS

|           |                                                                                                            |
|-----------|------------------------------------------------------------------------------------------------------------|
| <b>A</b>  | Aluminum shell, black anodize finish, fluid resistant insert (not MIL-Spec)                                |
| <b>F</b>  | Aluminum shell, electroless nickel finish, fluid resistant insert                                          |
| <b>W</b>  | Aluminum shell, cadmium olive drab finish, fluid resistant insert                                          |
| <b>FS</b> | Stainless steel shell, passivated, fluid resistant insert                                                  |
| <b>RS</b> | Fluid resistant insert                                                                                     |
| <b>KT</b> | Firewall, steel shell, cadmium/olive drab finish, non-flammable hard dielectric and fluid resistant insert |
| <b>KS</b> | Firewall, stainless steel shell, passivated, non-flammable hard dielectric and fluid resistant insert      |

**NEW AB** Marine Bronze: 2,000 hr. salt spray, -65dB@10GHz

**NEW DS** AP-93 Tri-Nickel Alloy, Aluminum, 1000 Hr., 200°C, -65dB@100Hz\*

**NEW DT** Aluminum shell, Durmalon (Nickle PTFE)

**NEW DZ** Aluminum shell, Black Zinc Nickel\*

## 4. SHELL SIZE & INSERT ARRANGEMENT SEE PAGES 3-13

First number represents Shell Size,  
second number is the Insert Arrangement.

## 5. CONTACT TYPE

|          |        |
|----------|--------|
| <b>P</b> | Pin    |
| <b>S</b> | Socket |

## 6. ALTERNATE POSITIONS

“W”, “X”, “Y”, “Z” designate that insert is rotated in its shell from normal position. No letter required for normal (no rotation) position. See page 16 for description of alternate positions.

## 7. MODIFICATION NUMBER

Consult Amphenol Aerospace for information.

For strain reliefs use the following modification codes:

|                  |                                                |
|------------------|------------------------------------------------|
| (189)            | E-nut M85049/31 configuration                  |
| (190)            | Straight strain relief M85049/52 configuration |
| (191)            | 90° strain relief M85049/51 configuration      |
| <b>NEW</b> (988) | RADSOK sockets (sizes 0-8 guage only)          |


# Wall Mounting Receptacle

## Military (MS3450), Commercial (9440)

PART NUMBER BUILDER PAGE M16

MILITARY  
MS3450

COMMERCIAL  
9440

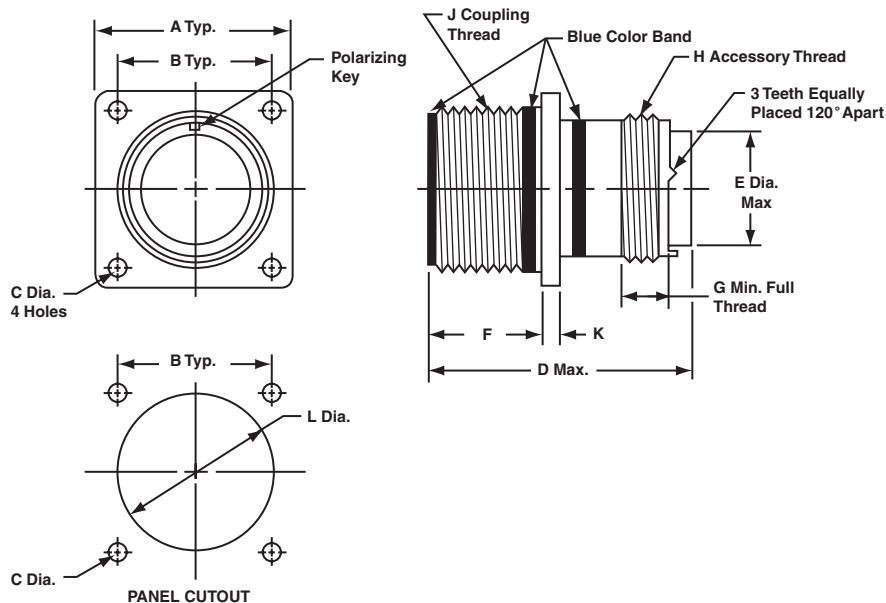

| Shell Size* | A<br>±.031 | B     | C Dia.<br>+.010<br>-.005 |         | D Max.                |                       | E Dia.<br>Max. | F         | G Min. | H Thread<br>Class 2A | J Thread<br>Class 2A | K    | L Dia.<br>±.010 |
|-------------|------------|-------|--------------------------|---------|-----------------------|-----------------------|----------------|-----------|--------|----------------------|----------------------|------|-----------------|
|             |            |       | Class A, F, R, W         | Class K | Size 16 & 12 Contacts | Size 8, 4, 0 Contacts |                |           |        |                      |                      |      |                 |
| 8S          | .875       | .594  | .120                     | .150    | 2.031                 | —                     | .305           | .593/.562 | .290   | .5000-20 UNEF        | .5000-28 UNEF        | .083 | .562            |
| 10S         | 1.000      | .719  | .120                     | .150    | 2.031                 | —                     | .405           | .593/.562 | .290   | .6250-24 UNEF        | .6250-24 UNEF        | .083 | .688            |
| 10SL        | 1.000      | .719  | .120                     | .150    | 2.031                 | —                     | .405           | .593/.562 | .290   | .6250-24 UNEF        | .6250-24 UNEF        | .083 | .688            |
| 12          | 1.094      | .812  | .120                     | .150    | 2.125                 | —                     | .549           | .781/.750 | .290   | .7500-20 UNEF        | .7500-20 UNEF        | .083 | .812            |
| 12S         | 1.094      | .812  | .120                     | .150    | 2.031                 | —                     | .549           | .593/.562 | .290   | .7500-20 UNEF        | .7500-20 UNEF        | .083 | .812            |
| 14          | 1.188      | .906  | .120                     | .150    | 2.125                 | —                     | .665           | .781/.750 | .290   | .8750-20 UNEF        | .8750-20 UNEF        | .083 | .938            |
| 14S         | 1.188      | .906  | .120                     | .150    | 2.031                 | —                     | .665           | .593/.562 | .290   | .8750-20 UNEF        | .8750-20 UNEF        | .083 | .938            |
| 16          | 1.281      | .969  | .120                     | .150    | 2.125                 | 2.500                 | .790           | .781/.750 | .290   | 1.0000-20 UNEF       | 1.0000-20 UNEF       | .083 | 1.062           |
| 16S         | 1.281      | .969  | .120                     | .150    | 2.031                 | —                     | .790           | .593/.562 | .290   | 1.0000-20 UNEF       | 1.0000-20 UNEF       | .083 | 1.062           |
| 18          | 1.375      | 1.062 | .120                     | .177    | 2.125                 | 2.500                 | .869           | .781/.750 | .290   | 1.0625-18 UNEF       | 1.1250-18 UNEF       | .125 | 1.188           |
| 20          | 1.500      | 1.156 | .120                     | .177    | 2.125                 | 2.500                 | .994           | .781/.750 | .290   | 1.1875-18 UNEF       | 1.2500-18 UNEF       | .125 | 1.312           |
| 22          | 1.625      | 1.250 | .120                     | .177    | 2.125                 | 2.500                 | 1.119          | .781/.750 | .290   | 1.3125-18 UNEF       | 1.3750-18 UNEF       | .125 | 1.438           |
| 24          | 1.750      | 1.375 | .147                     | .177    | 2.125                 | 2.500                 | 1.244          | .843/.812 | .290   | 1.4375-18 UNEF       | 1.5000-18 UNEF       | .125 | 1.562           |
| 28          | 2.000      | 1.562 | .147                     | .177    | 2.125                 | 2.500                 | 1.465          | .843/.812 | .467   | 1.7500-18 UNS        | 1.7500-18 UNS        | .125 | 1.812           |
| 32          | 2.250      | 1.750 | .173                     | .209    | 2.125                 | 2.500                 | 1.715          | .906/.875 | .467   | 2.0000-18 UNS        | 2.0000-18 UNS        | .125 | 2.062           |
| 36          | 2.500      | 1.938 | .173                     | .209    | 2.125                 | 2.500                 | 1.930          | .906/.875 | .467   | 2.2500-16 UN         | 2.2500-16 UN         | .125 | 2.312           |
| 40          | 2.750      | 2.188 | .173                     | .209    | 2.125                 | 2.500                 | 2.145          | .906/.875 | .467   | 2.5000-16 UN         | 2.5000-16 UN         | .125 | 2.562           |

\* Consult Amphenol Aerospace for availability of shell sizes 44 and 48.

5015

MATRIX


# Cable Connecting Receptacle

## Military (MS3451), Commercial (9441)

PART NUMBER BUILDER PAGE M16

**MILITARY**  
**MS3451**

**COMMERCIAL**  
**9441**

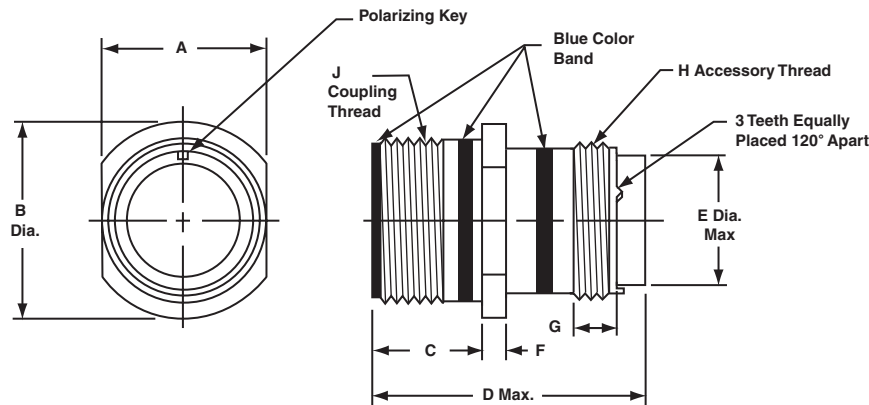

| Shell Size | A           | B Dia. ±.031 | C         | D Max.                |                       | E Dia. Max. | F ±.015 | G Min. | H Thread Class 2A | J Thread Class 2A |
|------------|-------------|--------------|-----------|-----------------------|-----------------------|-------------|---------|--------|-------------------|-------------------|
|            |             |              |           | Size 16 & 12 Contacts | Size 8, 4, 0 Contacts |             |         |        |                   |                   |
| 8S         | .504/.496   | .729         | .577/.562 | 2.031                 | —                     | .305        | .083    | .290   | .5000-20 UNEF     | .5000-28 UNEF     |
| 10S        | .629/.621   | .854         | .577/.562 | 2.031                 | —                     | .405        | .083    | .290   | .6250-24 UNEF     | .6250-24 UNEF     |
| 10SL       | .629/.621   | .854         | .577/.562 | 2.031                 | —                     | .405        | .083    | .290   | .6250-24 UNEF     | .6250-24 UNEF     |
| 12         | .754/.746   | .974         | .765/.750 | 2.125                 | —                     | .549        | .083    | .290   | .7500-20 UNEF     | .7500-20 UNEF     |
| 12S        | .754/.746   | .974         | .577/.562 | 2.031                 | —                     | .549        | .083    | .290   | .7500-20 UNEF     | .7500-20 UNEF     |
| 14         | .879/.871   | 1.099        | .765/.750 | 2.125                 | —                     | .665        | .083    | .290   | .8750-20 UNEF     | .8750-20 UNEF     |
| 14S        | .879/.871   | 1.099        | .577/.562 | 2.031                 | —                     | .665        | .083    | .290   | .8750-20 UNEF     | .8750-20 UNEF     |
| 16         | 1.005/.996  | 1.224        | .765/.750 | 2.125                 | 2.500                 | .790        | .083    | .290   | 1.0000-20 UNEF    | 1.0000-20 UNEF    |
| 16S        | 1.005/.996  | 1.224        | .577/.562 | 2.031                 | —                     | .790        | .083    | .290   | 1.0000-20 UNEF    | 1.0000-20 UNEF    |
| 18         | 1.131/1.121 | 1.349        | .765/.750 | 2.125                 | 2.500                 | .869        | .125    | .290   | 1.0625-18 UNEF    | 1.1250-18 UNEF    |
| 20         | 1.256/1.246 | 1.474        | .765/.750 | 2.125                 | 2.500                 | .994        | .125    | .290   | 1.1875-18 UNEF    | 1.2500-18 UNEF    |
| 22         | 1.381/1.371 | 1.599        | .765/.750 | 2.125                 | 2.500                 | 1.119       | .125    | .290   | 1.3125-18 UNEF    | 1.3750-18 UNEF    |
| 24         | 1.506/1.496 | 1.715        | .827/.812 | 2.125                 | 2.500                 | 1.244       | .125    | .290   | 1.4375-18 UNEF    | 1.5000-18 UNEF    |
| 28         | 1.756/1.746 | 1.974        | .827/.812 | 2.125                 | 2.500                 | 1.465       | .125    | .467   | 1.7500-18 UNS     | 1.7500-18 UNS     |
| 32         | 2.007/1.996 | 2.224        | .890/.870 | 2.125                 | 2.500                 | 1.715       | .125    | .467   | 2.0000-18 UNS     | 2.0000-18 UNS     |
| 36         | 2.257/2.246 | 2.474        | .890/.870 | 2.125                 | 2.500                 | 1.930       | .125    | .467   | 2.2500-16 UN      | 2.2500-16 UN      |
| 40         | 2.511/2.456 | 2.724        | .890/.870 | 2.125                 | 2.500                 | 2.145       | .125    | .467   | 2.5000-16 UN      | 2.5000-16 UN      |

\* Consult Amphenol Aerospace for availability of shell sizes 44 and 48.


# Box Mounting Receptacle

## Military (MS3452), Commercial (9442)

PART NUMBER BUILDER PAGE M16

MILITARY  
MS3452

COMMERCIAL  
9442

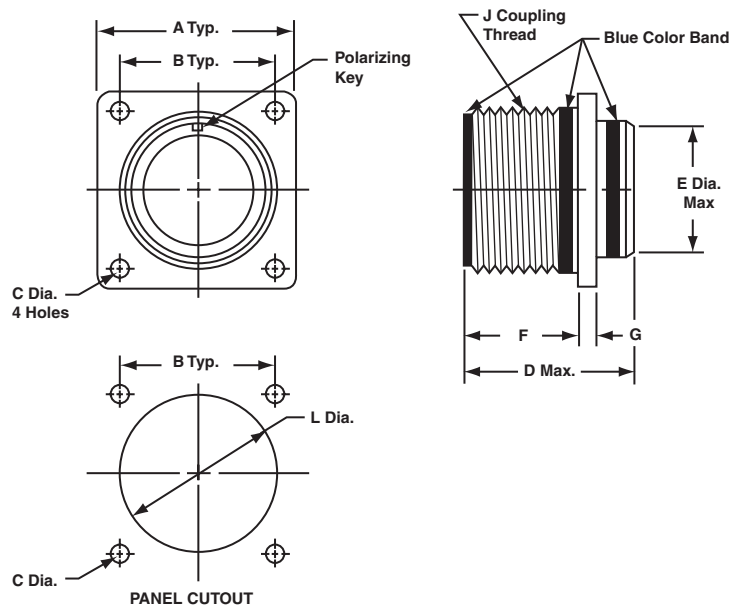

| Shell Size* | A<br>±.031 | B     | C<br>Dia. | D Max.                      |                             | E<br>Dia.<br>±.016 | F         | G<br>±.015 | J<br>Thread<br>Class 2A | L<br>Dia.<br>±.010 |
|-------------|------------|-------|-----------|-----------------------------|-----------------------------|--------------------|-----------|------------|-------------------------|--------------------|
|             |            |       |           | Size<br>16 & 12<br>Contacts | Size<br>8, 4, 0<br>Contacts |                    |           |            |                         |                    |
| 8S          | .875       | .594  | .130/.115 | 1.662                       | —                           | .500               | .578/.562 | .083       | .5000-28 UNEF           | .562               |
| 10S         | 1.000      | .719  | .130/.115 | 1.662                       | —                           | .625               | .578/.562 | .083       | .6250-24 UNEF           | .688               |
| 10SL        | 1.000      | .719  | .130/.115 | 1.662                       | —                           | .625               | .578/.562 | .083       | .6250-24 UNEF           | .688               |
| 12          | 1.094      | .812  | .130/.115 | 1.662                       | —                           | .750               | .765/.750 | .083       | .7500-20 UNEF           | .812               |
| 12S         | 1.094      | .812  | .130/.115 | 1.662                       | —                           | .750               | .578/.562 | .083       | .7500-20 UNEF           | .812               |
| 14          | 1.188      | .906  | .130/.115 | 1.662                       | —                           | .875               | .765/.750 | .083       | .8750-20 UNEF           | .938               |
| 14S         | 1.188      | .906  | .130/.115 | 1.662                       | —                           | .875               | .577/.562 | .083       | .8750-20 UNEF           | .938               |
| 16          | 1.281      | .969  | .130/.115 | 1.662                       | 1.937                       | 1.000              | .765/.750 | .083       | 1.0000-20 UNEF          | 1.062              |
| 16S         | 1.281      | .969  | .130/.115 | 1.662                       | —                           | 1.000              | .577/.562 | .083       | 1.0000-20 UNEF          | 1.062              |
| 18          | 1.375      | 1.062 | .130/.115 | 1.662                       | 1.937                       | 1.062              | .765/.750 | .125       | 1.1250-18 UNEF          | 1.188              |
| 20          | 1.500      | 1.156 | .130/.115 | 1.662                       | 1.937                       | 1.187              | .765/.750 | .125       | 1.2500-18 UNEF          | 1.312              |
| 22          | 1.625      | 1.250 | .130/.115 | 1.662                       | 1.937                       | 1.312              | .765/.750 | .125       | 1.3750-18 UNEF          | 1.438              |
| 24          | 1.750      | 1.375 | .157/.142 | 1.662                       | 1.937                       | 1.437              | .827/.812 | .125       | 1.5000-18 UNEF          | 1.562              |
| 28          | 2.000      | 1.562 | .157/.142 | 1.662                       | 1.937                       | 1.750              | .827/.812 | .125       | 1.7500-18 UNS           | 1.812              |
| 32          | 2.250      | 1.750 | .183/.168 | 1.662                       | 1.937                       | 2.000              | .988/.875 | .125       | 2.0000-18 UNS           | 2.062              |
| 36          | 2.500      | 1.938 | .183/.168 | 1.662                       | 1.937                       | 2.250              | .988/.875 | .125       | 2.2500-16 UN            | 2.312              |
| 40          | 2.750      | 2.188 | .183/.168 | 1.662                       | 1.937                       | 2.500              | .988/.875 | .125       | 2.5000-16 UN            | 2.562              |

\* Consult Amphenol Aerospace for availability of shell sizes 44 and 48.


# Jam Nut Receptacle

## Military (MS3454), Commercial (9444)

### PART NUMBER BUILDER PAGE M16

**MILITARY**  
**MS3454**

**COMMERCIAL**  
**9444**

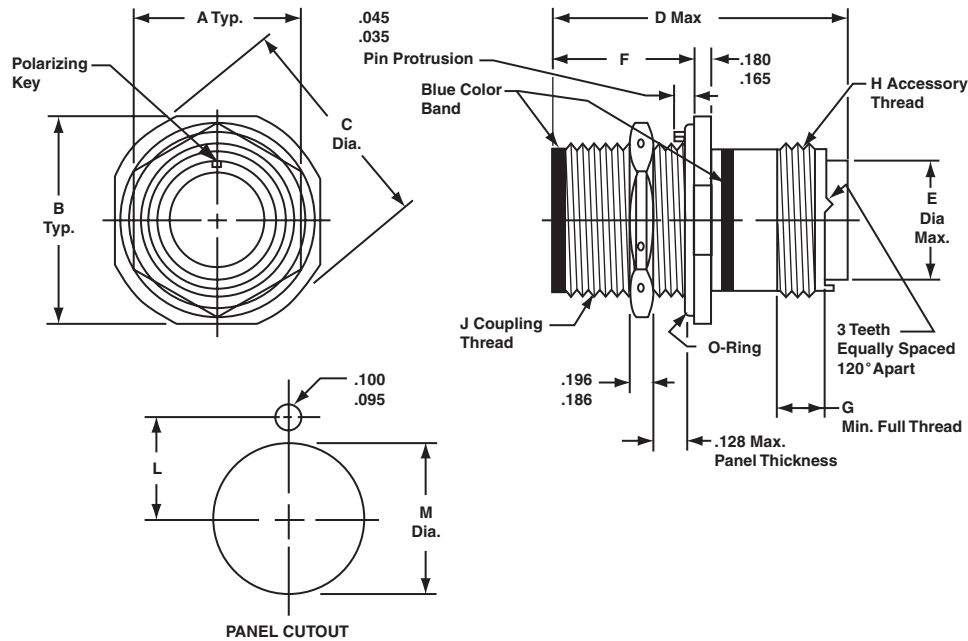

| Shell Size* | A<br>±.010 | B<br>±.005 | C Dia.<br>±.005 | D Max.                |                       | E Dia.<br>Max. | F<br>±.005 | G Min. | H Thread<br>Class 2A | J Thread<br>Class 2A | Panel Cutout Dimensions |                          |
|-------------|------------|------------|-----------------|-----------------------|-----------------------|----------------|------------|--------|----------------------|----------------------|-------------------------|--------------------------|
|             |            |            |                 | Size 16 & 12 Contacts | Size 8, 4, 0 Contacts |                |            |        |                      |                      | L<br>±.005              | M Dia.<br>+.015<br>-.000 |
| 8S          | .687       | 1.187      | 1.272           | 2.031                 | —                     | .305           | .720       | .290   | .5000-20 UNEF        | .5000-28 UNEF        | .323                    | .505                     |
| 10S         | .812       | 1.312      | 1.397           | 2.031                 | —                     | .405           | .720       | .290   | .6250-24 UNEF        | .6250-24 UNEF        | .385                    | .630                     |
| 10SL        | .812       | 1.312      | 1.397           | 2.031                 | —                     | .405           | .720       | .290   | .6250-24 UNEF        | .6250-24 UNEF        | .385                    | .630                     |
| 12          | .937       | 1.437      | 1.522           | 2.125                 | —                     | .549           | .970       | .290   | .7500-20 UNEF        | .7500-20 UNEF        | .448                    | .755                     |
| 12S         | .937       | 1.437      | 1.522           | 2.031                 | —                     | .549           | .720       | .290   | .7500-20 UNEF        | .7500-20 UNEF        | .448                    | .755                     |
| 14          | 1.125      | 1.562      | 1.647           | 2.125                 | —                     | .665           | .970       | .290   | .8750-20 UNEF        | .8750-20 UNEF        | .510                    | .880                     |
| 14S         | 1.125      | 1.562      | 1.647           | 2.031                 | —                     | .665           | .720       | .290   | .8750-20 UNEF        | .8750-20 UNEF        | .510                    | .880                     |
| 16          | 1.250      | 1.687      | 1.772           | 2.125                 | 2.500                 | .790           | .970       | .290   | 1.0000-20 UNEF       | 1.0000-20 UNEF       | .573                    | 1.005                    |
| 16S         | 1.250      | 1.687      | 1.772           | 2.031                 | —                     | .790           | .720       | .290   | 1.0000-20 UNEF       | 1.0000-20 UNEF       | .573                    | 1.005                    |
| 18          | 1.375      | 1.812      | 1.897           | 2.125                 | 2.500                 | .869           | .970       | .290   | 1.0625-18 UNEF       | 1.1250-18 UNEF       | .635                    | 1.130                    |
| 20          | 1.500      | 1.937      | 2.022           | 2.125                 | 2.500                 | .994           | .970       | .290   | 1.1875-18 UNEF       | 1.2500-18 UNEF       | .698                    | 1.255                    |
| 22          | 1.625      | 2.156      | 2.241           | 2.125                 | 2.500                 | 1.119          | .970       | .290   | 1.3125-18 UNEF       | 1.3750-18 UNEF       | .760                    | 1.380                    |
| 24          | 1.750      | 2.281      | 2.366           | 2.125                 | 2.500                 | 1.244          | .970       | .290   | 1.4375-18 UNEF       | 1.5000-18 UNEF       | .823                    | 1.505                    |
| 28          | 2.000      | 2.531      | 2.616           | 2.125                 | 2.500                 | 1.465          | .970       | .467   | 1.7500-18 UNS        | 1.7500-18 UNS        | .948                    | 1.755                    |
| 32          | 2.375      | 2.781      | 2.866           | 2.125                 | 2.500                 | 1.715          | .970       | .467   | 2.0000-18 UNS        | 2.0000-18 UNS        | 1.073                   | 2.005                    |
| 36          | 2.625      | 3.031      | 3.116           | 2.125                 | 2.500                 | 1.930          | .970       | .467   | 2.2500-16 UN         | 2.2500-16 UN         | 1.198                   | 2.255                    |
| 40          | 2.875      | 3.281      | 3.366           | 2.125                 | 2.500                 | 2.145          | .970       | .467   | 2.5000-16 UN         | 2.5000-16 UN         | 1.323                   | 2.505                    |

\* Consult Amphenol Aerospace for availability of shell sizes 44 and 48.


# Straight Plug

## Military (MS3456), Commercial (9446)

### PART NUMBER BUILDER PAGE M16

MILITARY  
MS3456

COMMERCIAL 9446

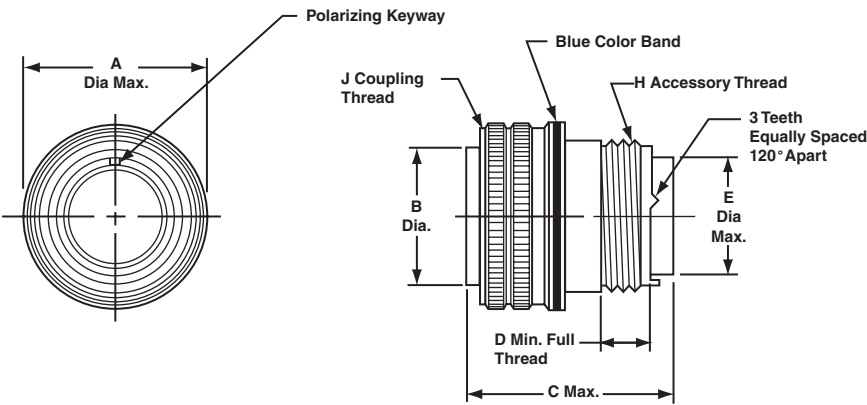

| Shell Size* | A Dia. Max. | B Dia. ±.005 | C Max.                |                       | D Min. | E Dia. Max. | H Thread Class 2A | J Thread Class 2B |
|-------------|-------------|--------------|-----------------------|-----------------------|--------|-------------|-------------------|-------------------|
|             |             |              | Size 16 & 12 Contacts | Size 8, 4, 0 Contacts |        |             |                   |                   |
| 8S          | .844        | .360         | 2.031                 | —                     | .290   | .305        | .5000-20 UNF      | .5000-28 UNEF     |
| 10S         | .969        | .435         | 2.031                 | —                     | .290   | .405        | .6250-24 UNEF     | .6250-24 UNEF     |
| 10SL        | .969        | .441**       | 2.031                 | —                     | .290   | .405        | .6250-24 UNEF     | .6250-24 UNEF     |
| 12          | 1.062       | .550         | 2.125                 | —                     | .290   | .549        | .7500-20 UNEF     | .7500-20 UNEF     |
| 12S         | 1.062       | .550         | 2.031                 | —                     | .290   | .549        | .7500-20 UNEF     | .7500-20 UNEF     |
| 14          | 1.156       | .670         | 2.125                 | —                     | .290   | .665        | .8750-20 UNEF     | .8750-20 UNEF     |
| 14S         | 1.156       | .670         | 2.031                 | —                     | .290   | .665        | .8750-20 UNEF     | .8750-20 UNEF     |
| 16          | 1.250       | .800         | 2.125                 | 2.500                 | .290   | .790        | 1.0000-20 UNEF    | 1.0000-20 UNEF    |
| 16S         | 1.250       | .800         | 2.031                 | —                     | .290   | .790        | 1.0000-20 UNEF    | 1.0000-20 UNEF    |
| 18          | 1.344       | .925         | 2.125                 | 2.500                 | .290   | .869        | 1.0625-18 UNEF    | 1.1250-18 UNEF    |
| 20          | 1.469       | 1.045        | 2.125                 | 2.500                 | .290   | .994        | 1.1875-18 UNEF    | 1.2500-18 UNEF    |
| 22          | 1.594       | 1.170        | 2.125                 | 2.500                 | .290   | 1.119       | 1.3125-18 UNEF    | 1.3750-18 UNEF    |
| 24          | 1.719       | 1.295        | 2.125                 | 2.500                 | .290   | 1.244       | 1.4375-18 UNEF    | 1.5000-18 UNEF    |
| 28          | 1.969       | 1.515        | 2.125                 | 2.500                 | .467   | 1.465       | 1.7500-18 UNS     | 1.7500-18 UNS     |
| 32          | 2.219       | 1.765        | 2.125                 | 2.500                 | .467   | 1.715       | 2.0000-18 UNS     | 2.0000-18 UNS     |
| 36          | 2.469       | 1.975        | 2.125                 | 2.500                 | .467   | 1.930       | 2.2500-16 UN      | 2.2500-16 UN      |
| 40          | 2.719       | 2.225        | 2.125                 | 2.500                 | .467   | 2.145       | 2.5000-16 UN      | 2.5000-16 UN      |

\* Consult Amphenol Aerospace for availability of shell sizes 44 and 48.

\*\* Tolerance on this dimension is +.000 –.006


# Straight Plug with Self-locking Coupling Nut

## Military (MS3459), Commercial (9816)

PART NUMBER BUILDER PAGE M16

**MILITARY**  
**MS3459**

**COMMERCIAL** **9816**

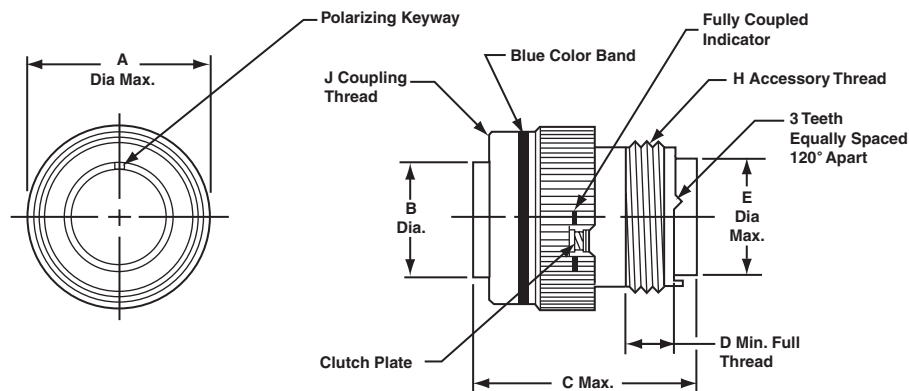

| Shell Size* | A Dia. Max. | B Dia. ±.005 | C Max.                |                       | D Min. | E Dia. Max. | H Thread Class 2A | J Thread Class 2B |
|-------------|-------------|--------------|-----------------------|-----------------------|--------|-------------|-------------------|-------------------|
|             |             |              | Size 16 & 12 Contacts | Size 8, 4, 0 Contacts |        |             |                   |                   |
| 8S          | .963        | .360         | 1.510                 | —                     | .290   | .305        | .5000-20 UNEF     | .5000-28 UNEF     |
| 10S         | 1.088       | .435         | 1.510                 | —                     | .290   | .405        | .6250-24 UNEF     | .6250-24 UNEF     |
| 10SL        | 1.088       | .441**       | 1.510                 | —                     | .290   | .405        | .6250-24 UNEF     | .6250-24 UNEF     |
| 12          | 1.213       | .550         | 1.780                 | —                     | .290   | .549        | .7500-20 UNEF     | .7500-20 UNEF     |
| 12S         | 1.213       | .550         | 1.510                 | —                     | .290   | .549        | .7500-20 UNEF     | .7500-20 UNEF     |
| 14          | 1.358       | .670         | 1.780                 | —                     | .290   | .665        | .8750-20 UNEF     | .8750-20 UNEF     |
| 14S         | 1.358       | .670         | 1.510                 | —                     | .290   | .665        | .8750-20 UNEF     | .8750-20 UNEF     |
| 16          | 1.463       | .800         | 1.780                 | 2.500                 | .290   | .790        | 1.0000-20 UNEF    | 1.0000-20 UNEF    |
| 16S         | 1.463       | .800         | 1.510                 | —                     | .290   | .790        | 1.0000-20 UNEF    | 1.0000-20 UNEF    |
| 18          | 1.588       | .925         | 1.850                 | 2.500                 | .290   | .869        | 1.0625-18 UNEF    | 1.1250-18 UNEF    |
| 20          | 1.713       | 1.045        | 1.850                 | 2.500                 | .290   | .994        | 1.1875-18 UNEF    | 1.2500-18 UNEF    |
| 22          | 1.788       | 1.170        | 1.850                 | 2.500                 | .290   | 1.119       | 1.3125-18 UNEF    | 1.3750-18 UNEF    |
| 24          | 1.963       | 1.295        | 1.850                 | 2.500                 | .290   | 1.244       | 1.4375-18 UNEF    | 1.5000-18 UNEF    |
| 28          | 2.213       | 1.515        | 1.850                 | 2.500                 | .467   | 1.465       | 1.7500-18 UNS     | 1.7500-18 UNS     |
| 32          | 2.463       | 1.765        | 1.850                 | 2.500                 | .467   | 1.715       | 2.0000-18 UNS     | 2.0000-18 UNS     |
| 36          | 2.713       | 1.975        | 1.850                 | 2.500                 | .467   | 1.930       | 2.2500-16 UN      | 2.2500-16 UN      |
| 40          | 2.963       | 2.225        | 1.850                 | 2.500                 | .467   | 2.145       | 2.5000-16 UN      | 2.5000-16 UN      |

\* Consult Amphenol Aerospace for availability of shell sizes 44 and 48.

\*\* Tolerance on this dimension is +.000 –.006

5015


MATRIX

# Quick Disconnect Plug, with/without Lanyard

## Commercial (9817)

PART NUMBER BUILDER PAGE M16

COMMERCIAL  
9818  
9817

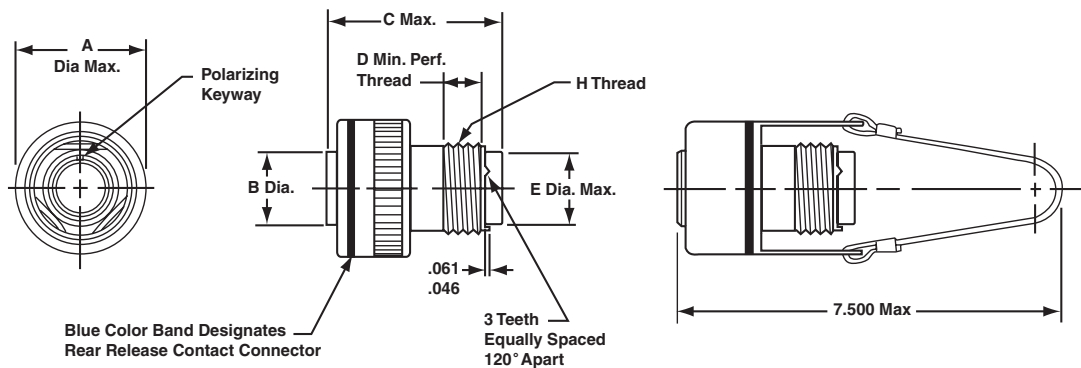


9818 CONNECTOR

9817 CONNECTOR WITH LANYARD

| Shell Size* | A Dia. Max. | B Dia. | C Max.                |                       | D Min. | E Dia. Max. | H Thread Class 2A | Amphenol/ Matrix Part Number for Adapter Ring |
|-------------|-------------|--------|-----------------------|-----------------------|--------|-------------|-------------------|-----------------------------------------------|
|             |             |        | Size 16 & 12 Contacts | Size 8, 4, 0 Contacts |        |             |                   |                                               |
| 8S          | 1.087       | .360   | 2.031                 | —                     | .290   | .305        | .5000-20 UNF      | 2500-008-0X08                                 |
| 10S         | 1.224       | .435   | 2.031                 | —                     | .290   | .405        | .6250-24 UNEF     | 2500-008-0X10                                 |
| 10SL        | 1.224       | .441   | 2.031                 | —                     | .290   | .405        | .6250-24 UNEF     | 2500-008-0X10                                 |
| 12          | 1.355       | .550   | 2.125                 | —                     | .290   | .549        | .7500-20 UNEF     | 2500-008-0X12                                 |
| 12S         | 1.355       | .550   | 2.031                 | —                     | .290   | .549        | .7500-20 UNEF     | 2500-008-0X13                                 |
| 14          | 1.482       | .670   | 2.125                 | —                     | .290   | .665        | .8750-20 UNEF     | 2500-008-0X14                                 |
| 14S         | 1.482       | .670   | 2.031                 | —                     | .290   | .665        | .8750-20 UNEF     | 2500-008-0X15                                 |
| 16          | 1.609       | .800   | 2.125                 | 2.500                 | .290   | .790        | 1.0000-20 UNEF    | 2500-008-0X16                                 |
| 16S         | 1.609       | .800   | 2.031                 | —                     | .290   | .790        | 1.0000-20 UNEF    | 2500-008-0X17                                 |
| 18          | 1.817       | .925   | 2.125                 | 2.500                 | .290   | .869        | 1.0625-18 UNEF    | 2500-008-0X18                                 |
| 20          | 1.942       | 1.045  | 2.125                 | 2.500                 | .290   | .994        | 1.1875-18 UNEF    | 2500-008-0X20                                 |
| 22          | 2.075       | 1.170  | 2.125                 | 2.500                 | .290   | 1.119       | 1.3125-18 UNEF    | 2500-008-0X22                                 |
| 24          | 2.203       | 1.295  | 2.125                 | 2.500                 | .290   | 1.244       | 1.4375-18 UNEF    | 2500-008-0X24                                 |
| 28          | 2.516       | 1.515  | 2.125                 | 2.500                 | .467   | 1.465       | 1.7500-18 UNS     | 2500-008-0X28                                 |
| 32          | 2.735       | 1.765  | 2.125                 | 2.500                 | .467   | 1.715       | 2.0000-18 UNS     | 2500-008-0X32                                 |
| 36          | 3.015       | 1.975  | 2.125                 | 2.500                 | .467   | 1.930       | 2.2500-16 UN      | 2500-008-0X36                                 |
| 40          | 3.306       | 2.225  | 2.125                 | 2.500                 | .467   | 2.145       | 2.5000-16 UN      | 2500-008-0X40                                 |

Required to mate the quick disconnect plug with receptacle. Not furnished with the quick disconnect plug and must be ordered separately.

Note: Use Locktite Material on the threads for a permanent installation to the shell. How to Order Adapter Ring



Part Number  
2500-008-0 X XX

Shell Size (varies from connector shell size designation, see last column of table at left)

Finish

- 0 - Electroless Nickel
- 1 - Black Anodize
- 2 - Cadmium/Olive Drab
- 3 - Stainless Steel, Passivated

\* Consult Amphenol Aerospace for availability of shell sizes 44 and 48.  
Receptacle Adapter Ring

# Contact Information, Sealing Plugs, Crimping and Insertion/Removal Tools

## MS/STANDARD CRIMP REAR RELEASE CONTACTS

| Contact Size | Wire Range |                 | Socket Contacts      |                             | Pin Contacts         |                             |
|--------------|------------|-----------------|----------------------|-----------------------------|----------------------|-----------------------------|
|              | AWG        | mm <sup>2</sup> | Military Part Number | Amphenol/Matrix Part Number | Military Part Number | Amphenol/Matrix Part Number |
| 16S*         | 20-16      | 0.5-1.4         | M39029/30-217        | M5100-033-1601L             | M39029/29-212        | M5000-029-0016L             |
| 16           | 20-16      | 0.5-1.4         | M39029/30-218        | M5100-033-1602L             | M39029/29-212        | M5000-029-0016L             |
| 12           | 14-12      | 2-3             | M39029/30-219        | M5100-033-0012              | M39029/29-213        | M5000-029-0012              |
| 8            | 10-8†      | 5-8.5           | M39029/30-220        | M5100-033-0008              | M39029/29-214        | M5000-029-0008              |
| 4            | 6-4†       | 13-21           | M39029/30-221        | M5100-033-0004              | M39029/29-215        | M5000-029-0004              |
| 0            | 2-0†       | 34-60           | M39029/30-222        | M5100-033-0000              | M39029/29-216        | M5000-029-0000              |

\* Shorter wire barrel

Note: For information on thermocouple contacts, consult Amphenol Aerospace

† Use MS3348 bushing kit to accommodate smaller wire.

## CONTACT CURRENT RATING AND RETENTION

| Contact Size** | Current Rating |                  |                          | Contact Retention |       |
|----------------|----------------|------------------|--------------------------|-------------------|-------|
|                | Amperes Max.   | RADSOK Amps Max. | Voltage Drops Millivolts | Axial Load        |       |
|                |                |                  |                          | lb.               | N     |
| 16             | 13             | N/A              | 50                       | 25                | 111.2 |
| 12             | 23             | N/A              | 50                       | 30                | 133.4 |
| 8              | 46             | 70               | 25                       | 50                | 222.4 |
| 4              | 80             | 120              | 14                       | 60                | 266.9 |
| 0              | 150            | 150              | 12                       | 75                | 333.6 |

\*\* Organize individual circuits to maintain heat rise within operating temperature requirements.

## SEALING PLUGS

| Contact Size | Sealing Plugs        |                             |
|--------------|----------------------|-----------------------------|
|              | Military Part Number | Amphenol/Matrix Part Number |
| 16S          | MS27488-16-3         | 10-405996-163               |
| 16           | MS27488-16-3         | 10-405996-163               |
| 12           | MS27488-12-3         | 10-405996-123               |
| 8            | MS27488-8-3          | 10-405996-083               |
| 4            | MS27488-4-3          | 10-405996-043               |
| 0            | MS27488-0-3          | 10-405996-003               |

## CRIMPING TOOLS

| Contact Size | Wire Range |                 | Finished Wire Dia. Range |            | Color Code  | Crimping Tool Part Number | Turret or Positioner Part Number |
|--------------|------------|-----------------|--------------------------|------------|-------------|---------------------------|----------------------------------|
|              | AWG        | mm <sup>2</sup> | Inch                     | mm         |             |                           |                                  |
| 16S          | 20-16      | 0.5-1.4         | .053-.103                | 1.34-2.62  | Red/White   | M22520/1-01               | M22520/1-02                      |
| 16           | 20-16      | 0.5-1.4         | .053-.103                | 1.34-2.62  | Blue/White  | M22520/1-01               | M22520/1-02                      |
| 12           | 14-12      | 2-3             | .085-.158                | 2.15-4.01  | Yell./White | M22520/1-01               | M22520/1-02                      |
| 8            | 10-8       | 5-8.5           | .132-.255                | 3.35-6.48  | White/Red   | M22520/23-01              | M22520/23-02                     |
| 4            | 6-4        | 13-21           | .237-.370                | 6.01-9.40  | White/Blue  | M22520/23-01              | M22520/23-04                     |
| 0            | 2-0        | 34-60           | .360-.550                | 9.14-13.97 | White/Yell. | M22520/23-01              | M22520/23-05                     |

## INSERTION/REMOVAL TOOLS

| Contact Size | Color Code   | Military Part Number | Amphenol/Matrix Part Number |
|--------------|--------------|----------------------|-----------------------------|
| 16           | Blue/White   | M81969/14-03         | 10-538988-016               |
| 12           | Yellow/White | M81969/14-04         | 10-538988-012               |
| 8            | Red          | M81969/14-06         | 6500-018-0008               |
| 4            | Blue         | M81969/14-07         | 6500-018-0004               |
| 0            | Yellow       | M81969/14-08         | 6500-018-0000               |

Amphenol installation instructions, L-2106, gives information on insertion, removal and crimping of contacts for Matrix MIL-DTL-5015 connectors.


5015

MATRIX


# Accessories

## Protection Caps – Plug


### PLUG PROTECTION CAP 10-329393-

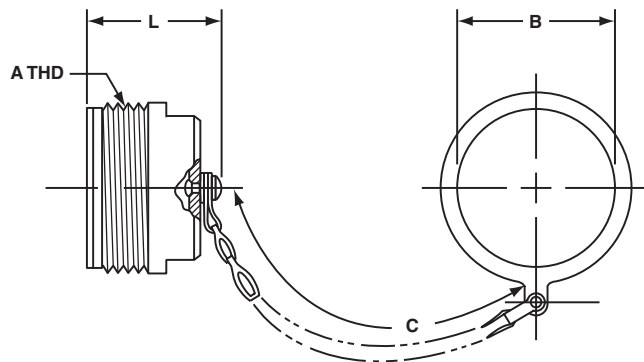

XX\*

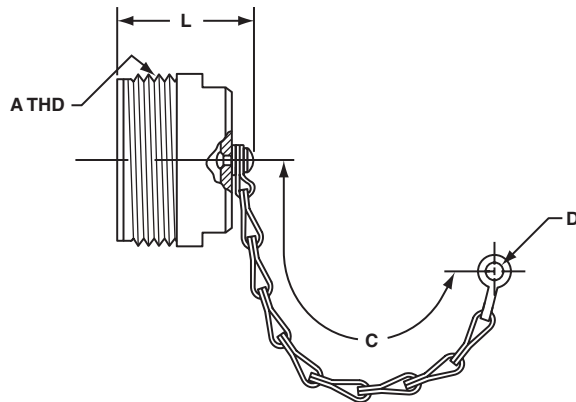

### PLUG PROTECTION CAP 10-229125-XX\*

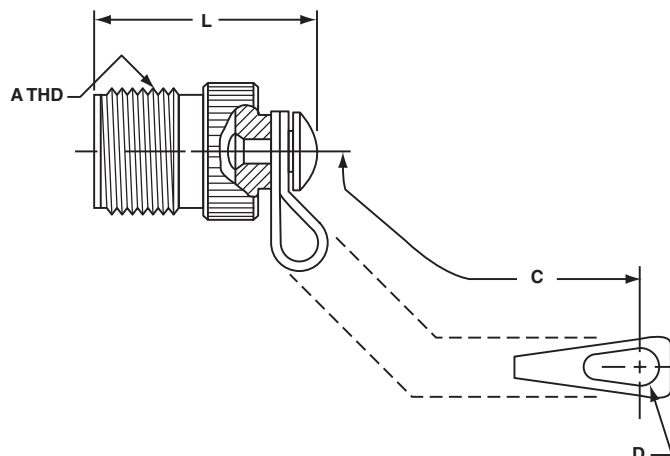

### PLUG PROTECTION CAP MS25042-XXDA\*

| Assembly Number  | A Thread Class 2A | B Dia. +.010<br>-.000 | C Approx. | L Max. |
|------------------|-------------------|-----------------------|-----------|--------|
| 10-329393-10 (*) | .625-24UNEF       | .641                  | 3.5       | 1.312  |
| 10-329393-11 (*) | .625-24UNEF       | .641                  | 3.5       | 1.312  |
| 10-329393-12 (*) | .750-20UNEF       | .766                  | 3.5       | 1.500  |
| 10-329393-14 (*) | .875-20UNEF       | .891                  | 3.5       | 1.500  |
| 10-329393-16 (*) | 1.000-20UNEF      | 1.016                 | 3.5       | 1.500  |
| 10-329393-18 (*) | 1.125-18UNEF      | 1.141                 | 3.5       | 1.500  |
| 10-329393-20 (*) | 1.250-18UNEF      | 1.266                 | 4.0       | 1.500  |
| 10-329393-22 (*) | 1.375-18UNEF      | 1.391                 | 4.0       | 1.500  |
| 10-329393-24 (*) | 1.500-18UNEF      | 1.641                 | 4.5       | 1.500  |
| 10-329393-28 (*) | 1.750-18UNS       | 1.891                 | 4.5       | 1.500  |
| 10-329393-32 (*) | 2.000-18UNS       | 2.078                 | 5.0       | 1.500  |
| 10-329393-36 (*) | 2.250-16UN        | 2.328                 | 5.0       | 1.500  |
| 10-329393-40 (*) | 2.500-16UN        | 2.641                 | 5.0       | 1.500  |

\* 3 = OD Cadmium Plating

G = Electroless Nickel Plating

| Assembly Number  | A Thread Class 2A | B Dia. +.010<br>-.000 | C Approx. | L Max. |
|------------------|-------------------|-----------------------|-----------|--------|
| 10-329393-44 (*) | 2.750-16UN        | 2.891                 | 6.0       | 1.500  |

| Assembly Number | A Thread Class 2A | C Approx. | D Ref. | L Max. |
|-----------------|-------------------|-----------|--------|--------|
| 10-229125-10    | .625-24NEF        | 3.0       | .140   | 1.233  |
| 10-229125-12    | .750-20UNEF       | 3.5       | .140   | 1.421  |
| 10-229125-14    | .875-20UNEF       | 3.5       | .140   | 1.421  |
| 10-229125-16    | 1.000-20UNEF      | 3.5       | .140   | 1.421  |
| 10-229125-18    | 1.125-18NEF       | 3.5       | .140   | 1.421  |
| 10-229125-20    | 1.250-18NEF       | 3.5       | .193   | 1.421  |
| 10-229125-22    | 1.375-18NEF       | 3.5       | .193   | 1.421  |
| 10-229125-24    | 1.500-18NEF       | 4.5       | .193   | 1.421  |

| Assembly Number | A Thread Class 2A | C Approx. | D Ref. | L Max. |
|-----------------|-------------------|-----------|--------|--------|
| 10-229125-28    | 1.750-18NS        | 4.5       | .193   | 1.421  |
| 10-229125-32    | 2.000-18NS        | 5.0       | .193   | 1.421  |
| 10-229125-36    | 2.250-16UN        | 5.0       | .193   | 1.421  |
| 10-229125-40    | 2.500-16UN        | 5.0       | .193   | 1.421  |


| MS Number    | A Thread Class 2A | B Dia. +.010<br>-.005 | C Approx. | L Max. |
|--------------|-------------------|-----------------------|-----------|--------|
| MS25042-8DA  | .500-28UNEF       | .156                  | 4.00      | .969   |
| MS25042-10DA | .625-24UNEF       | .156                  | 4.00      | .969   |
| MS25042-12DA | .750-20UNEF       | .156                  | 4.50      | 1.156  |
| MS25042-14DA | .875-20UNEF       | .156                  | 4.50      | 1.156  |
| MS25042-16DA | 1.000-20UNEF      | .156                  | 4.50      | 1.156  |
| MS25042-18DA | 1.125-18UNEF      | .156                  | 4.50      | 1.156  |
| MS25042-20DA | 1.250-18UNEF      | .187                  | 5.00      | 1.156  |
| MS25042-22DA | 1.375-18UNEF      | .187                  | 5.00      | 1.156  |
| MS25042-24DA | 1.500-18UNEF      | .187                  | 5.50      | 1.156  |
| MS25042-28DA | 1.750-18UNS       | .187                  | 7.75      | 1.156  |
| MS25042-32DA | 2.000-18UNS       | .218                  | 7.75      | 1.156  |
| MS25042-36DA | 2.250-16UN        | .218                  | 7.75      | 1.156  |
| MS25042-40DA | 2.500-16UN        | .218                  | 7.75      | 1.156  |

\* Protective caps are illustrated with sash chains and are available with beaded chains or without chains. Optional terminations are also available. Consult Amphenol Aerospace when ordering.

### RECEPTACLE PROTECTION CAP MS25043-XXDA\*


| Assembly Number | A<br>Thread<br>Class 2B | B<br>Dia.<br>Min. | C<br>Approx. | D<br>Dia.<br>Max. | L<br>Max. |
|-----------------|-------------------------|-------------------|--------------|-------------------|-----------|
| 10-329394-10    | .625-24UNEF             | .641              | 3.5          | .875              | .793      |
| 10-329394-12    | .750-20UNEF             | .766              | 3.5          | 1.000             | .793      |
| 10-329394-14    | .875-20UNEF             | .891              | 3.5          | 1.125             | .793      |
| 10-329394-16    | 1.000-20UNEF            | 1.016             | 3.5          | 1.250             | .793      |
| 10-329394-18    | 1.125-18UNEF            | 1.094             | 3.5          | 1.375             | 1.024     |
| 10-329394-20    | 1.250-18UNEF            | 1.203             | 4.0          | 1.500             | 1.024     |
| 10-329394-22    | 1.375-18UNEF            | 1.343             | 4.0          | 1.625             | 1.024     |
| 10-329394-24    | 1.500-18UNEF            | 1.453             | 4.5          | 1.750             | 1.024     |
| 10-329394-28    | 1.750-18UNS             | 1.766             | 4.5          | 2.000             | 1.024     |
| 10-329394-32    | 2.000-18UNS             | 2.016             | 5.0          | 2.250             | 1.024     |
| 10-329394-36    | 2.250-16UN              | 2.266             | 5.0          | 2.500             | 1.024     |
| 10-329394-40    | 2.500-16UN              | 2.516             | 5.0          | 2.656             | 1.024     |
| 10-329394-44    | 2.750-16UN              | 2.766             | 6.0          | 2.938             | 1.024     |

### RECEPTACLE PROTECTION CAP 10-329394-XX\*

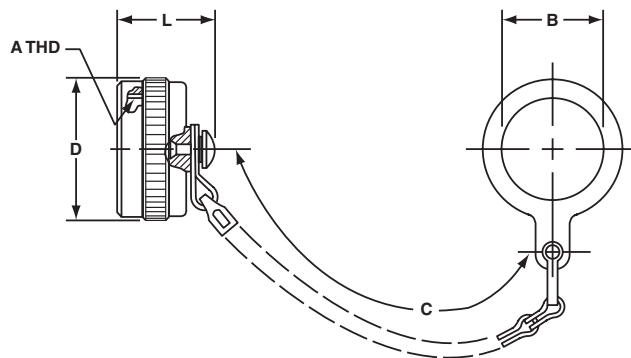

| Assembly Number | A<br>Thread<br>Class 2B | B<br>Ref. | C<br>Approx. | D<br>Dia.<br>Max. | L<br>Max. |
|-----------------|-------------------------|-----------|--------------|-------------------|-----------|
| 10-422905-103   | .625-24UNEF             | .140      | 3.0          | .875              | .812      |
| 10-422905-123   | .750-20UNEF             | .140      | 3.5          | 1.000             | .812      |
| 10-422905-143   | .875-20UNEF             | .140      | 3.5          | 1.125             | .812      |
| 10-422905-163   | 1.000-20UNEF            | .140      | 3.5          | 1.250             | .812      |
| 10-422905-183   | 1.125-18UNEF            | .193      | 3.5          | 1.375             | 1.031     |
| 10-422905-203   | 1.250-18UNEF            | .193      | 4.0          | 1.500             | 1.031     |
| 10-422905-223   | 1.375-18UNEF            | .193      | 4.0          | 1.625             | 1.031     |
| 10-422905-243   | 1.500-18UNEF            | .193      | 4.5          | 1.750             | 1.031     |
| 10-422905-283   | 1.750-18UNS             | .193      | 4.5          | 2.000             | 1.031     |
| 10-422905-323   | 2.000-18UNS             | .193      | 5.0          | 2.250             | 1.031     |

### RECEPTACLE PROTECTION CAP 10-422905-

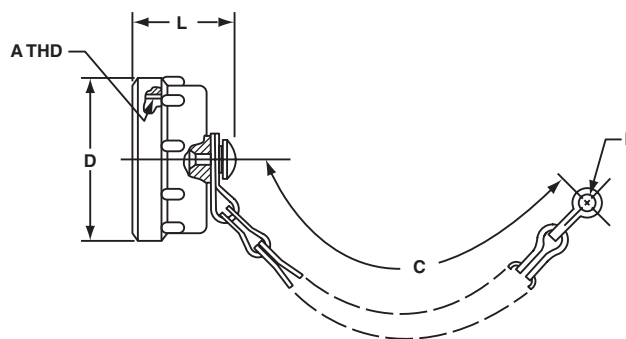


| Assembly Number | A<br>Thread<br>Class 2B | B<br>Ref. | C<br>Approx. | D<br>Dia.<br>Max. | L<br>Max. |
|-----------------|-------------------------|-----------|--------------|-------------------|-----------|
| 10-422905-363   | 2.250-16UN              | .193      | 5.0          | 2.500             | 1.031     |
| 10-422905-403   | 2.500-16UN              | .193      | 5.0          | 2.656             | 1.031     |

| MS Number    | A<br>Thread<br>Class 2B | B<br>+.010<br>-.005 | C<br>Approx. | D<br>Dia.<br>Max. | L<br>Max. |
|--------------|-------------------------|---------------------|--------------|-------------------|-----------|
| MS25043-8DA  | .500-28UNEF             | .140                | 4.00         | .688              | .750      |
| MS25043-10DA | .625-24UNEF             | .140                | 4.00         | .815              | .750      |
| MS25043-12DA | .750-20UNEF             | .140                | 4.50         | 1.000             | .750      |
| MS25043-14DA | .875-20UNEF             | .140                | 4.50         | 1.125             | .750      |
| MS25043-16DA | 1.000-20UNEF            | .140                | 4.50         | 1.188             | .750      |
| MS25043-18DA | 1.125-18UNEF            | .140                | 4.50         | 1.344             | .750      |
| MS25043-20DA | 1.250-18UNEF            | .140                | 5.00         | 1.469             | .750      |
| MS25043-22DA | 1.375-18UNEF            | .140                | 5.00         | 1.594             | .750      |
| MS25043-24DA | 1.500-18UNEF            | .171                | 5.50         | 1.719             | .750      |
| MS25043-28DA | 1.750-18UNS             | .171                | 7.75         | 1.969             | .812      |
| MS25043-32DA | 2.000-18UNS             | .187                | 7.75         | 2.219             | .812      |
| MS25043-36DA | 2.250-16UN              | .187                | 7.75         | 2.469             | .812      |
| MS25043-40DA | 2.500-16UN              | .187                | 7.75         | 2.719             | .812      |

\* Protective caps are illustrated with sash chains and are available with beaded chains or without chains. Optional terminations are also available. Consult Amphenol Aerospace when ordering.


XXX\*

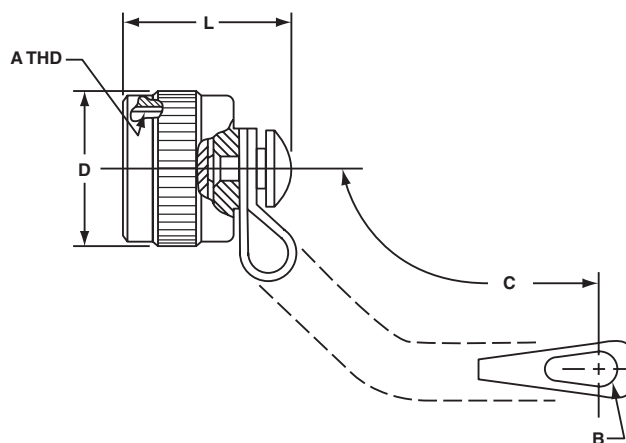

# MIL-DTL-5015 Accessories


## Dust Caps

### 10-70500 RECEPTACLE DUST CAP FOR EXTERNAL THREADS

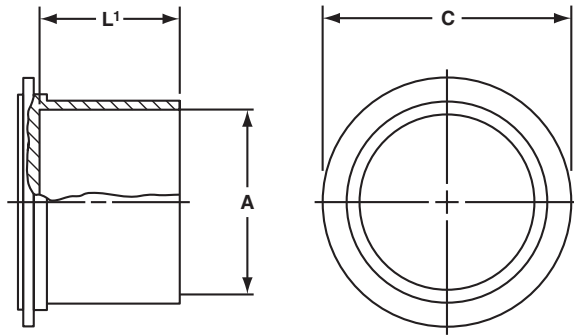

| MS Shell Size | Order Number | A Dia. Nominal Thread | C Dia. $\pm .031$ | L <sup>1</sup> $\pm .062$ |
|---------------|--------------|-----------------------|-------------------|---------------------------|
| 8S            | 10-70500-8   | .500                  | .750              | .500                      |
| 10S           | 10-70500-10  | .625                  | .875              | .500                      |
| 10SL          | 10-70500-10  | .625                  | .875              | .500                      |
| 12S           | 10-70500-12  | .750                  | 1.000             | .500                      |
| 12            | 10-70500-12  | .750                  | 1.000             | .500                      |
| 14S           | 10-70500-14  | .875                  | 1.125             | .500                      |
| 14            | 10-70500-14  | .875                  | 1.125             | .500                      |
| 16S           | 10-70500-16  | 1.000                 | 1.250             | .500                      |
| 16            | 10-70500-16  | 1.000                 | 1.250             | .500                      |
| 18            | 10-70500-18  | 1.125                 | 1.375             | .562                      |
| 20            | 10-70500-20  | 1.250                 | 1.500             | .562                      |
| 22            | 10-70500-22  | 1.375                 | 1.625             | .562                      |
| 24            | 10-70500-24  | 1.500                 | 1.750             | .562                      |
| 28            | 10-70500-28  | 1.750                 | 1.938             | .562                      |
| 32            | 10-70500-32  | 2.000                 | 2.250             | .562                      |
| 36            | 10-70500-36  | 2.250                 | 2.500             | .625                      |
| 40            | 10-70500-40  | 2.500                 | 2.750             | .625                      |

### 10-70506 PLUG DUST CAP FOR INTERNAL THREADS

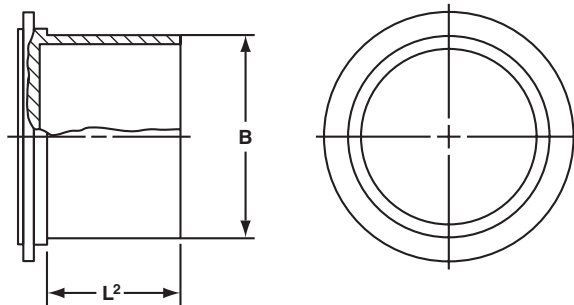

| MS Shell Size | Order Number | B Dia. Min. | L <sup>2</sup> $\pm .125$ |
|---------------|--------------|-------------|---------------------------|
| 8S            | 10-70506-8S  | .469        | .625                      |
| 10S           | 10-70506-10S | .587        | .625                      |
| 10SL          | 10-70506-10S | .587        | .625                      |
| 12S           | 10-70506-12  | .704        | .625                      |
| 12            | 10-70506-12  | .704        | .625                      |
| 14S           | 10-70506-14  | .828        | .625                      |
| 14            | 10-70506-14  | .828        | .625                      |
| 16S           | 10-70506-16  | .953        | .625                      |
| 16            | 10-70506-16  | .953        | .625                      |
| 18            | 10-70506-18  | 1.072       | .625                      |
| 20            | 10-70506-20  | 1.197       | .625                      |
| 22            | 10-70506-22  | 1.322       | .625                      |
| 24            | 10-70506-24  | 1.447       | .625                      |
| 28            | 10-70506-28  | 1.697       | .625                      |
| 32            | 10-70506-32  | 1.947       | .625                      |
| 36            | 10-70506-36  | 2.190       | .625                      |
| 40            | 10-70506-40  | 2.440       | .625                      |

## Notes

[illegible]

## Notes

# Amphenol

**Amphenol Aerospace Operations**

40-60 Delaware Avenue  
Sidney, NY 13838  
800-678-0141

**Amphenol Commercial Air Division**

40-60 Delaware Avenue  
Sidney, NY 13838  
1-800-687-0141

**Amphenol Nexus Technologies**

316 Courtland Avenue  
Stamford, CT 06906  
203-327-7300

**Amphenol PCD**

72 Cherry Hill Drive  
Beverly, MA 01915  
978-624-3400

**Amphenol SV Microwave**

2400 Centrepark West Drive  
West Palm Beach, FL  
561-840-1800

**Amphenol Times Microwave, Inc.**

358 Hall Avenue  
Wallingford, CT 06492  
800-867-2629

**Amphenol Fiber Systems International**

1300 Central Expressway North, Suite 100  
Allen, TX 75013  
214-547-2400

**Amphenol Borisch Technologies**

4511 East Paris Avenue  
Grand Rapids, MI 49512  
616-554-9820

**Amphenol Printed Circuits**

91 Northeastern Boulevard  
Nashua, NH 03062  
603-324-4500

**Amphenol Canada**

5950 14th Ave  
Markham, ON L3S 3K5  
416-291-4401

**Amphenol XMA**

7 Perimeter Road  
Manchester, NH 03103  
603-222-2256

**Amphenol Q Microwave**

1591 Pioneer Way  
El Cajon, CA 92020  
619-258-7322

**Amphenol CIT**

100 Tensolite Dr.  
St. Augustine, FL 32092  
800-458-9960

**Amphenol Invotec**

Unit 1-3, Hedging Lane Industrial Estate  
Dosthill, Tamworth, B77 5HH United Kingdom  
+44 (0) 1827 263250

**Amphenol Ionix Systems**

Prospect House, Taylor Business Park  
Risley, Warrington, WA3 6HP United Kingdom  
+44 (0) 1942 685200

**Amphenol Limited**

Thanet Way  
Whitstable, Kent, CT5 3JF United Kingdom  
+44 (0) 1227 773200

**Amphenol Socapex**

948 Promenade De L'Arve – BP 29  
74311 Thyez France  
+33 (0) 4 50 89 28 00

**Amphenol Air LB SAS**

2 Rue Clément Ader, Zac de Wé  
08110 Carignan France  
+33 (0) 03 24 22 78 49

**Amphenol AirLB GmbH**

Am Kleinbahnhof 4  
D-66740 Saarlouis Germany  
+49 (0) 68 31/98 10 0

**Amphenol SEFEE**

Z.I. des Cazes – BP243  
12402 Saint-Affrique Cedex France  
+33 (0) 5 65 98 11 00

**Amphenol Interconnect India**

105, Bhosari Industrial Area  
Pune – 411 026 India  
+91 20 27120363

**Amphenol Japan, Ltd.**

471-1, Deba, Ritto-City  
Shiga, 520 3041 Japan  
+81 77 553 8501

**Amphenol Martec Limited**

St. Augustines Business Park  
Swalecliffe, Whitstable, Kent  
CT5 2QJ United Kingdom  
+44 (0) 1227 793 733

**Amphenol Optimize**

Carretera Internacional Km 6.5  
Col. Parque Industrial  
Nogales, Sonora, México. C.P. 84094  
+52 (631) 311-160

**Amphenol Ionix Systems OÜ**

Pikk Street 59b  
Kuressaare 93815 Estonia  
+372 4521 780

**AMAO – European Sales Operations**

Via Barbaiana 5  
20020 Lainate Milano, Italy  
+39 02 932 541

**Amphenol Bar-Tec Ltd.**

3 Hagavish st  
POB 2479 Kfar-Saba 44641  
Israel  
+972-9-7644100

Notice: Specifications are subject to change without notice. Contact your nearest Amphenol Corporation Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable but are presented without guarantee, warranty, or responsibility of any kind expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all connectors.

AMPHENOL CORPORATION

40-60 Delaware Avenue, Sidney, NY 13838-1395 • 800-678-0141

[www.amphenol-aerospace.com](http://www.amphenol-aerospace.com) • [www.amphenolmao.com](http://www.amphenolmao.com)