M8637 SERIES

DC/DC POWER SUPPLY



PRODUCT HIGHLIGHTS

- MINIATURE
- HIGH DENSITY
- TRIPLE OUTPUT
- DC/DC CONVERTERS
- UP TO 125W

John Tucci • Phone: (607) 563-5388 • Email: jtucci@amphenol-aao.com
• www.amphenol-aerospace.com

Amphenol
MILITARY HIGH SPEED

M8637 SERIES DC/DC POWER SUPPLY

Applications

Military, Ruggedized, Telecom, Industrial

Special Features

- Miniature size
- High efficiency
- Wide input range
- Input / Output isolation
- Fixed switching frequency (250 kHz)
- External synchronization capability
- TTL logic enable
- EMI filters included
- Indefinite short circuit protection with auto-recovery
- Over temperature protection

Environmental Conditions

Designed to meet MIL-STD-810F

Temperature:
Operating –55 °C to +85 °C (baseplate)
Storage –55 °C to +125 °C

Altitude:
Method 500.4, Procedures I & II up to 70,000 ft. Operational

Humidity:
Method 507.4 - Up to 95% RH (including condensation)

Salt Fog:
Method 509.4

Vibration and Shock:
Shock: Saw-tooth, 20 g peak, 11 ms.
Vibration: Figure 514.5C-17 general minimum integrity exposure (1 hour per axis)

Reliability

150,000 hours calculated per MIL-STD-217F Notice 2, at +85 °C baseplate, Ground Fixed.

Electrical Specifications

DC INPUT

Normal voltage range: 18 to 70 V_{DC}
Option: 12 to 70 V_{DC} – *consult factory*

Abnormal transient protection:
No damage (may shut down) when exposed to abnormal transients IAW MIL-STD-1275A (100 V for 50 ms) and MIL-STD-704A (80 V for 0.1 s)

Efficiency: up to 80%

EMC: Designed to meet MIL-STD-461F*

CE101, CE102, CS101, CS114, CS115, CS116, RE101, RE102, RS101, RS103

Isolation:
Input to Output:
200 V_{DC} Input to Case:
200 V_{DC}

DC OUTPUT (floating)

Line/Load regulation:
Up to ±1% (no load to full load, –55 °C to +85 °C)

Ripple and Noise: 50 mV_{p-p}, typical (max. 1%)

Current limiting (Hiccup):
Continuous protection for unlimited time

Over Voltage Protection:
Passive transorbs on outputs.

Over Temperature


Protection:
Shutdown if baseplate temperature exceeds +105 °C ± 5 °C; Automatic recovery upon cooldown to below +95 °C ± 5 °C.

Isolation:
Output to Case: 100 V_{DC}

* EMC compliance achieved when tested with 5 µH LISNs, shielded harness and static resistive load.

John Tucci • Phone: (607) 563-5388 • Email: jtucci@amphenol-aao.com
• www.amphenol-aerospace.com


Operational Block Diagram

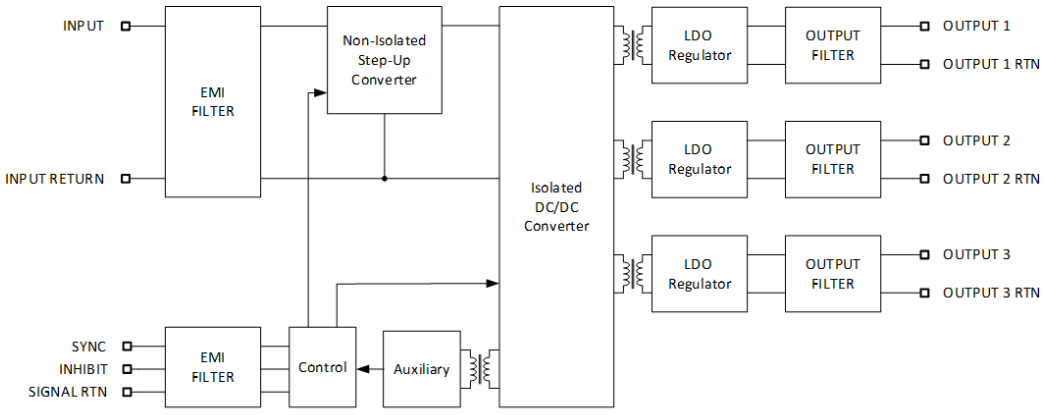

Outputs Range

Output #	Voltage Range	Current Range	Power Range
1	3.3 to 28 V_{DC}	0 to 10 A	0 to 50 W
2	3.3 to 28 V_{DC}	0 to 6 A	0 to 50 W
3	7 to 28 V_{DC}	0 to 6 A	0 to 50 W
Total			0 to 125 W

Typical Connection Diagram

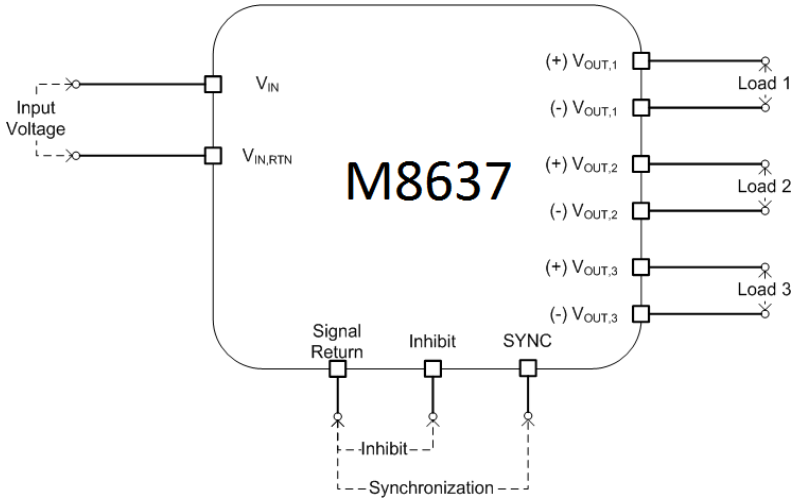

John Tucci • Phone: (607) 563-5388 • Email: jtucci@amphenol-aao.com
• www.amphenol-aerospace.com

*Pin Assignment**


Connector type: 55302/61-A30

Mates with: M55302/62-A30M (solder cup termination) or M55302/66-30M (#22 AWG crimp termination) or eq.

Pin No.	Function
1	OUT 1 (+)
2	OUT 1 (+)
3	OUT 1 (+)
4	OUT 1 RTN (–)
5	OUT 1 RTN (–)
6	OUT 2 (+)
7	OUT 2 RTN (–)
8	OUT 3 (+)
9	OUT 3 RTN (–)
10	N.C.

Pin No.	Function
11	SIGNAL RTN
12	VIN RTN (–)
13	VIN RTN (–)
14	VIN (+)
15	VIN (+)
16	OUT 1 (+)
17	OUT 1 (+)
18	OUT 1 RTN (–)
19	OUT 1 RTN (–)
20	OUT 1 RTN (–)

Pin No.	Function
21	OUT 2 (+)
22	OUT 2 RTN (–)
23	OUT 3 (+)
24	OUT 3 RTN (–)
25	INHIBIT
26	VIN RTN (–)
27	VIN RTN (–)
28	VIN (+)
29	VIN (+)
30	SYNC

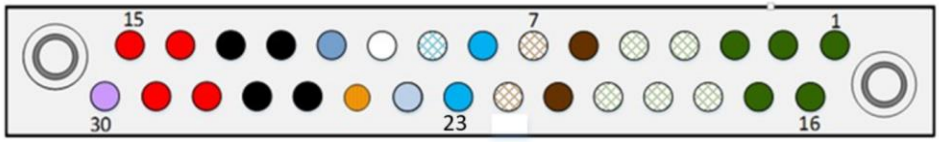

* For optimal performance, connect all pins with identical designation together.

John Tucci • Phone: (607) 563-5388 • Email: jtucci@amphenol-aao.com
• www.amphenol-aerospace.com

Functions and Signals

INHIBIT

The ***INHIBIT*** signal is used to turn the power supply ON and OFF.
TTL "1"or OPEN – Power supply is ON (For normal operation, leave this pin unconnected.)
TTL "0" or SHORT to ***SIGNAL RTN*** – Power supply is OFF.

SYNC


The ***SYNC*** signal is used to allow the power supply's switching frequency to sync with the system clock.
The external clock's frequency can be 250 kHz ± 10 kHz.
When this pin is left open (unconnected) the power supply will synchronize to its internal clock, set at 250 kHz ± 10 kHz.


SIGNAL RTN


The ***SIGNAL RTN*** is used as a return path for the ***SYNC*** and ***INHIBIT*** signals.
This pin is referenced to ***VIN RTN***.


John Tucci • Phone: (607) 563-5388 • Email: jtucci@amphenol-aao.com
• www.amphenol-aerospace.com


Outline Drawing

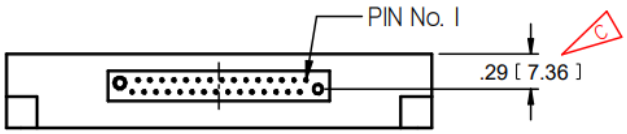

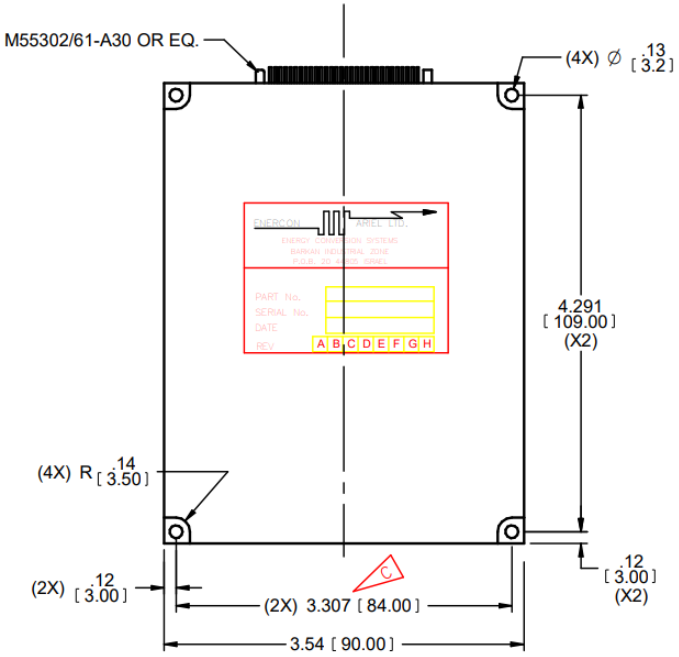

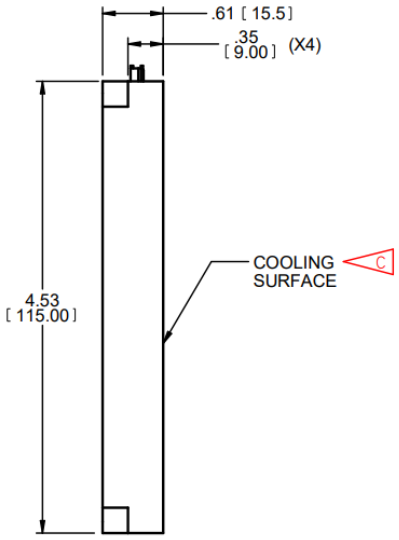





UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES (MM).
TOLERANCES ARE:

DECIMALS	ANGLES
.XX± 0.02	±
.XXX± 0.010	

DO NOT SCALE DRAWING

NOTES :

1. MATERIAL: ALUMINUM ALLOY (6061-T651 & 5052-H32)
2. FINISH: CHEMICAL CONVERSION COATING MIL-DTL-5541 LAST REV.,TYPE I, CLASS 1A
3. WORKMANSHIP SHALL BE MIL-STD-454, REQT. 9
4. HEAT DISSIPATION AREA - 6.045 IN²

John Tucci • Phone: (607) 563-5388 • Email: jtucci@amphenol-aao.com
• www.amphenol-aerospace.com

Standard Models List (for other voltages – consult factory)

Part number	Input	Output 1		Output 2		Output 3	
	Voltage range	Voltage	Current	Voltage	Current	Voltage	Current
M8637100	18 to 48 V_{DC}	5 V_{DC}	10 A	3.3 V_{DC}	6 A	12 V_{DC}	4 A
M8637101	18 to 48 V_{DC}	5 V_{DC}	10 A	3.3 V_{DC}	6 A	28 V_{DC}	1.7 A
M8637102	18 to 48 V_{DC}	5 V_{DC}	6 A	15 V_{DC}	3 A	15 V_{DC}	3 A
M8637103	18 to 48 V_{DC}	5 V_{DC}	6 A	12 V_{DC}	4 A	12 V_{DC}	4 A
M8637104	18 to 48 V_{DC}	5 V_{DC}	1.25 A	15 V_{DC}	3.2 A	15 V_{DC}	3.2 A

- Additional standard configurations available. **Contact factory for more details.**
- All of our products can be configured to comply with EU REACH regulations. **Contact factory for more details.**

Note: Specifications are subject to change without prior notice by the manufacturer.

John Tucci • Phone: (607) 563-5388 • Email: jtucci@amphenol-aao.com
• www.amphenol-aerospace.com