


# SCFF ON-BOARD TRANSCEIVER

28Gbps High-Speed 1-TRX Optical Module

PDS - 533

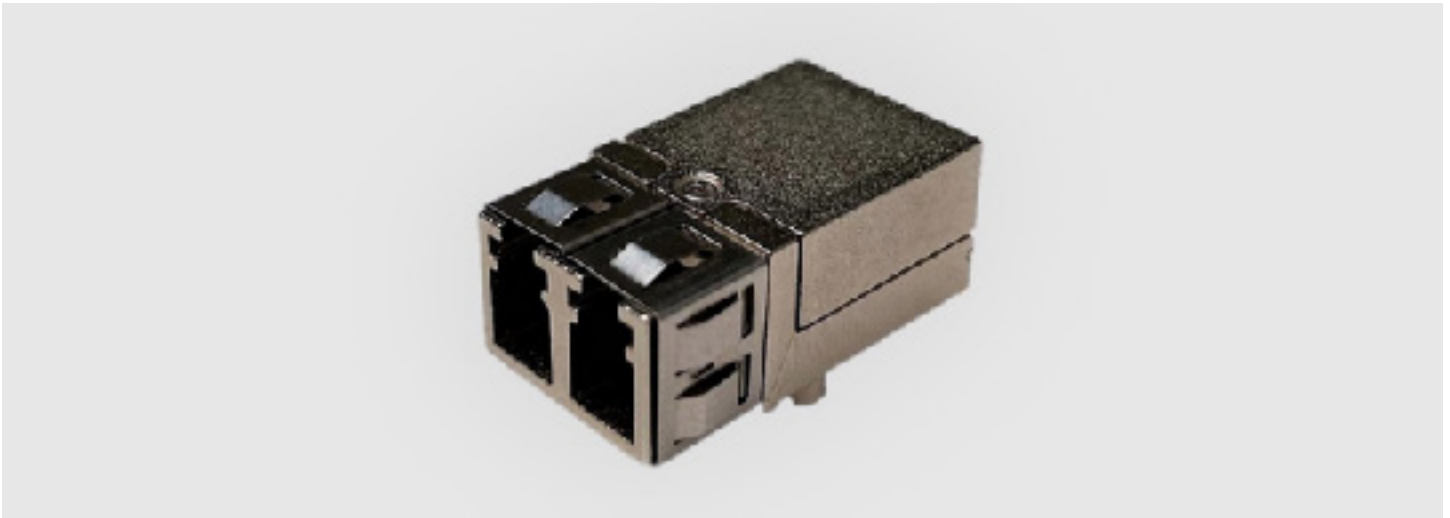

Amphenol Military High Speed 28Gbps SCFF High-Speed 1-TRX Optical Module - Small Cubic Form Factor, it is designed for extended temperatures and highly challenging, rugged applications where both reliability and performance are critical. A single channel device capable of data rates up to 28 Gbps, to support any high speed application.

## KEY FEATURES:

- **Duplex LC optical cavities** that optimizes rack space, reaching distance of 70m at 25Gbps (OM4 cable) and distances up to 300m at 10Gbps (OM3 cable).
- **Less than 1.1 W of power consumption** to power up the SCFF at 28Gbps, including CDR and FEC, transceiver optimization and monitoring connection discovery, channel diagnostics, and signal status monitoring.
- **Die casting housing that uses 2x less board space** than SFP+ form factor.
- **Embedded solderable** with a 12-pin electrical interface complying with SFF-8431 specs for high-speed interfaces, the SCFF is state of the art product.
- **Upgrade to 28Gbps without board design change** by using the same footprint pin layout. An easy swap to the next generation with a simple command.
- **Dual sourcing friendly**, the DUAL SCFF aggregates 56Gbps in one generic daughter card.

## APPLICATIONS

- Industrial Control
- Commercial Aerospace
- Military Vehicles
- Military aerospace
- Ground Vehicle
- Maritime
- Avionics
- Missiles
- Ground Stations
- Radar
- Commercial Cabin Systems
- In Flight Entertainment
- Cockpit Management
- Electronic Warfare
- AI Supercomputers
- Datacom/Telecom Networking
- Industrial Instrumentation and Control

**MIL-AERO**  
GRADE

MIL-STD-883 SHOCK & VIBE

# BUILD A PART NUMBER:

## SCFF On-Board Transceiver

Part Number	Description
<b>CF-170021-100</b>	<b>SCFF, 10G, -40°C to 85°C, Coated</b>
<b>CF-170021-103</b>	<b>SCFF, 25G, -40°C to 85°C, Uncoated</b>
<b>CF-170021-106</b>	<b>SCFF, 10G, -40°C to 85°C, Uncoated</b>
<b>CF-170021-110</b>	<b>SCFF, 25G, -40°C to 85°C, Coated</b>

### FEATURES:

- Size of 13.8 x 26.2 x 10.6 mm - including pins
- Data rate transparent from 1.25Gbps to 28.05Gbps
- Standard duplex LC optical interface
- SFF -8472 compliant two-wire control and diagnostic interface (I<sup>2</sup>c)
- Enhanced Bit Error Rate (10<sup>-12</sup>) requires no or limited FEC
- Programmable input equalization
- Programmable output amplitude and deemphasis
- Clock and Data Recovery

### SUPPORT STANDARDS:

- 25Gbps Ethernet
- 1.25Gbps to 25Gbps proprietary links
- 10GbE
- EDR Infiniband
- 8G/16G/32G Fiber Channel
- CPRI

### ELECTRICAL PERFORMANCE:

- Power Supply Voltage: 3.3V only
- Bit Error Rate
  - BER <10<sup>-12</sup> @ 25.78Gbps, PRBS31
  - BER <10<sup>-12</sup> @ 10.31Gbps, PRBS31
- Lanes per device: 1 Transmit and 1 Receive
- Low Power Consumption (1W @25G)
- Transmitter Type: 850nm VCSEL Laser
- Receiver Type: PIN Photodiode

### ENVIRONMENTAL:

- RoHS compliant
- Case Operating Temperature: -40°C to 85°C
- Conformal coating option
- Shock MIL-STD 883: Method 2002.4 (500g; 1ms)
- Vibe MIL-STD 883: Method 2007.3 (20g)

### BENEFITS:

- Supports standard and non-standard protocols in this range of data rates (10GbE, 25GbE, 8G/16G/32G Fiber Channel).
- Ideal for applications requiring safe optical connection
- Lower system latency and better system performance
- 16dB of signal peaking at 14GHz
- Compensate for PCB traces loss for proper signal conditioning
- Guaranteed performance over full data rate range

### MATING CABLES:

- Amphenol Military High Speed produces custom optical cables also! Contact us for more info.

### EVALUATION KIT:

Try out the power of the SCFF through our evaluation kits. Ships together with Application Notes and a Graphical User Interface (GUI) to simulate various scenarios in a very simply and effective way.