


WaSP

DURABLE, LIGHTWEIGHT, LOW-COST, MICROMINIATURE CIRCULAR CONNECTOR

PDS - 381

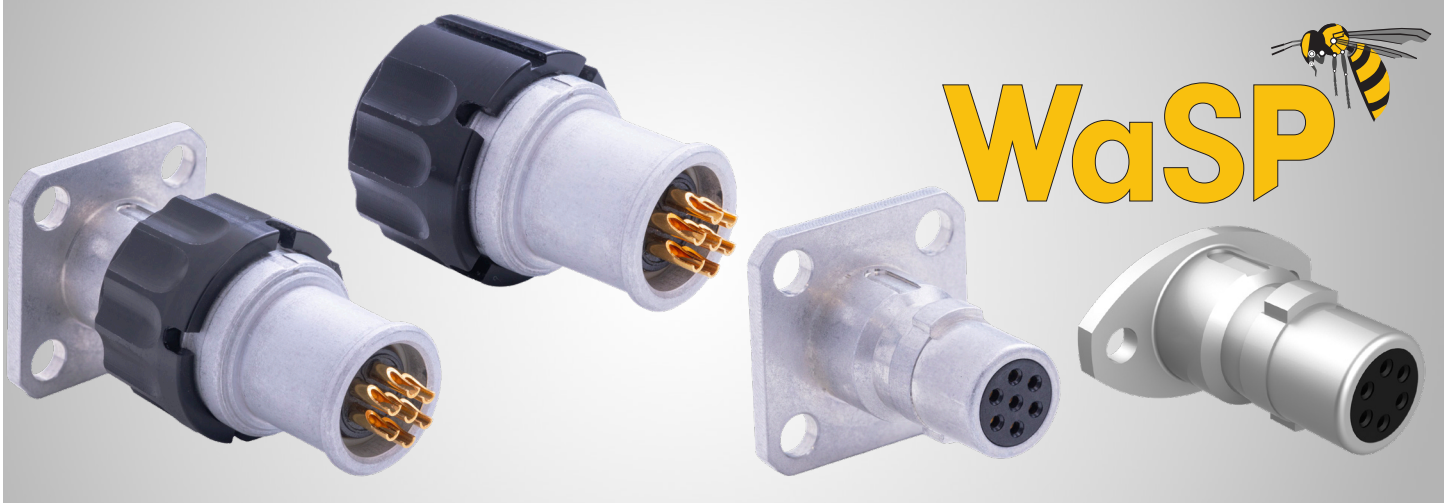

Designed for High-Volume Harsh-Environment Applications that Prioritize Size, Weight, Power, and Cost (SWaP-C)

Based on our TERRAPIN SCE2 series, the new WaSP microminiature range takes the TERRAPIN's compact, rugged, lightweight design and optimizes it even further for high-volume SWaP-C applications.

The WaSP microminiature circular connector features a simplified interface designed for ease of use, quick mating, and affordability. With no jam nut and a 1/4 turn polymer locking ring, mating the WaSP is quick and easy. Its lightweight aluminum shell and locking ring ensures the WaSP only adds minimal weight to applications that prioritize lightweight designs, and its low-profile size ensures it will take up minimal space in your assembly.

The WaSP series is designed to operate in a range of harsh environments. It features IP67 environmental sealing, a passivation anti-corrosion layer, can operate in a temperature range of -55°C (-67°F) to + 85°C (185°F), and can withstand 48 hours of salt spray. Its environmental durability makes it optimal for a wide range of smaller platforms operating on land, in the air, or at sea.

WaSP is the ideal interconnect for high-volume, low-cost SWaP-C applications such as UAVs and drone swarm technologies, UGVs, communications systems, and more. Turn to WaSP for systems intended for production and use in high-quantities that must strictly adhere to rigorous size, weight, power, and cost profiles.

FEATURES & BENEFITS:

- Lightweight aluminum shell
- Lightweight 1/4 turn polymer
- Locking ring
- Simplified geometry
- Passivation anticorrosion layer
- Sealed IP67
- 3 keying options



PERFORMANCE DATA

ELECTRICAL

Current Rating	25 AWG Contacts: 5A d.c. (subject to ambient temperature)
Shell to Shell Continuity	10mΩ
Contact Resistance	5mΩ initial 10mΩ maximum
Insulation Resistance	1000MΩ minimum, production tested to 500MΩ*
Working Voltage AC (RMS)	400V contact dependant
Dielectric Withstanding Voltage	2mA maximum leakage
Number of ways	7



TECHNICAL

Mating Durability	50 cycles minimum
Non-magnetic	Yes



ENVIRONMENTAL

Operating Temperature Range	-55°C (-67°F) to + 85°C (185°F)
Sealing (mated and unmated)	IP67
Salt Spray	48 hours
RoHS Compliant	Yes
Suitable for RoHS compliant Soldering	Yes




WALL MOUNT RECEPTACLE 7 WAY

Weight: 4.0 Grams (0.141 ounces)

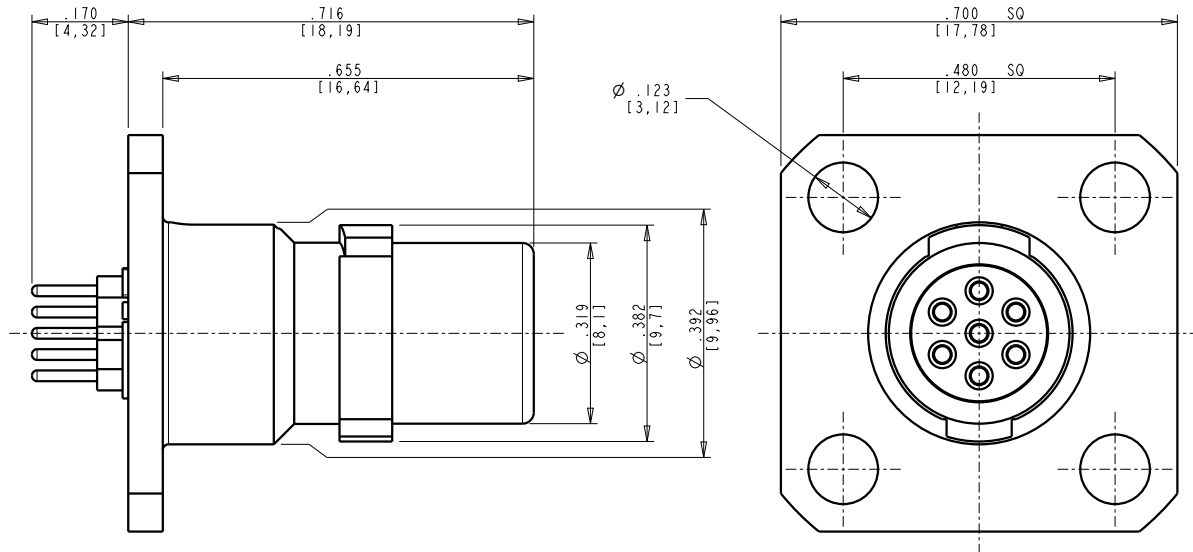



WALL MOUNT PLUG 7 WAY

Weight: 5.4 Grams (0.191 ounces)

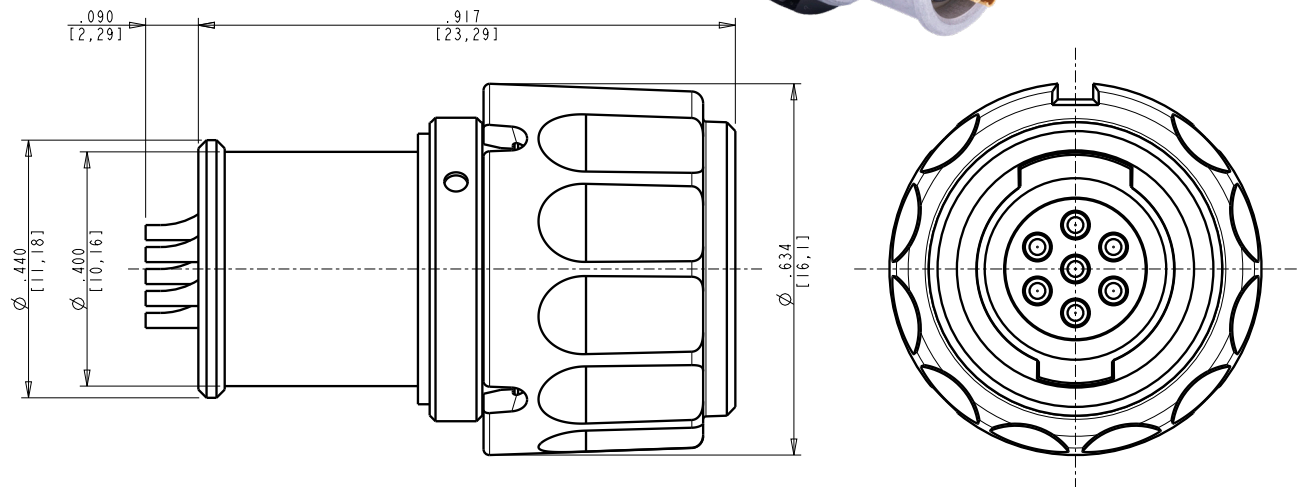

WALL MOUNT RECEPTACLE 2-HOLE FLANGE

Weight: 3.7 Grams (0.131 ounces)

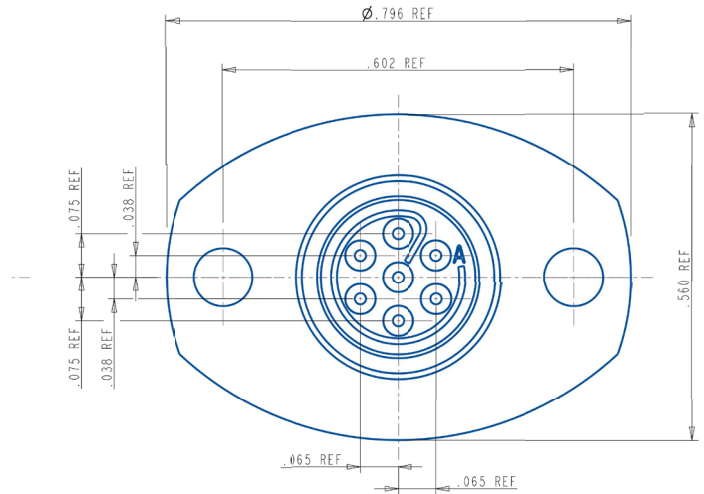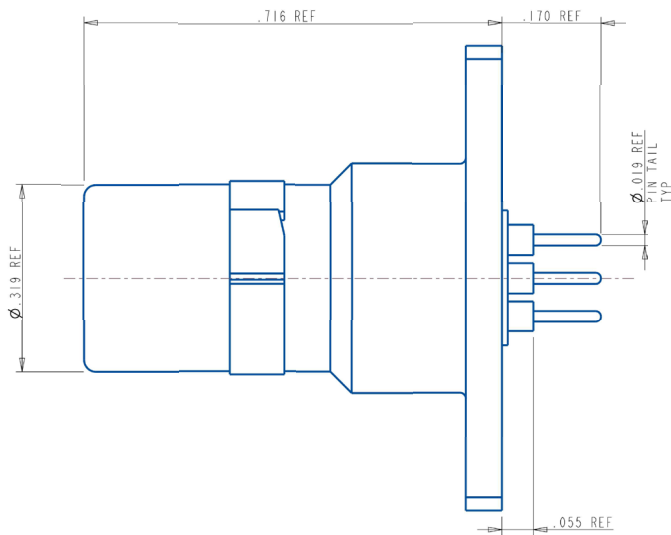

ORDERING GUIDE FOR WaSP

1.	2.	3.	4.	5.
Series	Shell Style	Shell Size & Platform	Contact Style	Keyway Orientation
WSP	06	06-07	P	N

1. Series	
WSP	Microminiature Low-Cost SWaP-C Connector

2. Shell Style	
06	Free (Cable)
02	4-hole Flange (Equipment)
03	2-hole Flange

3. Shell Size & Platform
06-07





4. Contact Style	
P	Pins*
S	Sockets**

5. Keyway Orientation	
Part Number	
N	Normal
A	
B	

*Free connector supplied with pins & solder bucket termination

**Fixed connector supplied with pins & solder bucket termination



Keyway Orientation Chart		
Part Number	Receptacle Keyway Orientation	Plug Keyway Orientation
N		
A		
B	