

88-556600/674  
91-556600/674

D38999/29, /30

### Tri-Start Failsafe Backshell Adapter Assembly Instructions

The backshell adapter assembly is removable if necessary to facilitate wiring. If removed the backshell adapter must be reassembled for proper operation of connector.

To remove adapter use a connector strap wrench such as provided in kit M83507/15.


Strap wrench to be applied to the thread area of the adapter.

**CAUTION:**

Do not use pliers or other tools which could damage threads or plating.

To reassemble, use strap wrench and tighten adapter to 50 in. lb. minimum using a torque wrench in combination with the strap wrench.

Connector plug should be coupled to a mating receptacle to facilitate loosening & tightening of the adapter.

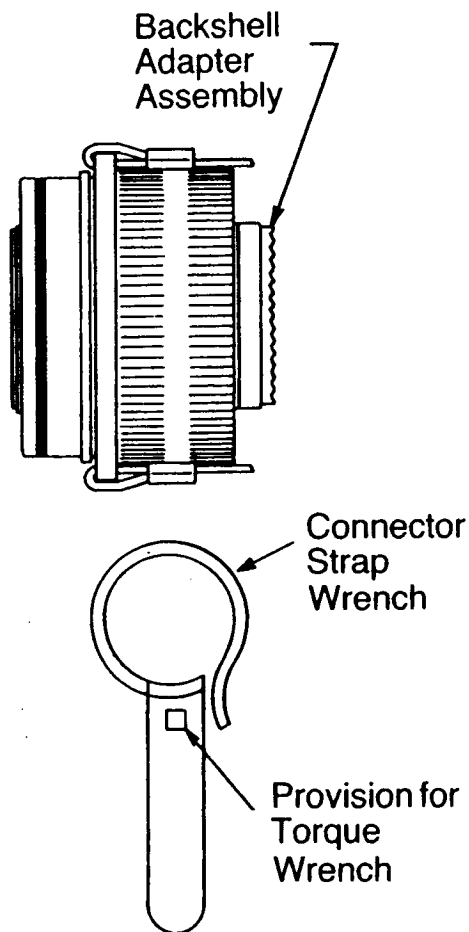

L-2065  
May 1988

FSCM 77820

---

**Amphenol**

---