


21-032911-001 (SOCKET)
21-032910-001 (PIN)

Contact, Size 8, Pin and Socket, Twinaxial,
 Type POSITRONICS Crimp
 Installation Instructions

See table on reverse side for cable recommended and crimp tool information.

- A. 1. Assemble outer ferrule over cable jacket (small diameter end first for tapered type ferrules).
 2. Strip cable as illustrated.
- B. 1. Flare cable braid back as shown.
 2. Cut off cable fillers (not shown) as close to cable braid as possible.
 3. Trim & strip blue and white wires as shown. (Optional method: wire insulation of blue and white wires may be cut at this point, and then removed after assembly of inner ferrule (step C1).)
- C. 1. Assemble inner ferrule over blue and white wires until flush against cable braid.
 2. Bend conductor of white wire as shown, to hold inner ferrule in position.
- D. 1. Assemble inner contact assembly over blue wire conductor until conductor is visible through the inner contact inspection hole.
 2. Crimp the inner contact using the crimp tool and positioner listed in table on back.
- E. 1. Form white wire conductor forward, over the rear of the inner contact assembly. Slide inner ferrule forward and over the white wire conductor as shown.
- F. 1. Slide outer contact assembly over inner contact assembly, until inner contact assembly snaps into the retention clips of the outer contact assembly (You should hear and/or feel the inner contact assembly snap into the retention clips). If uncertain, a slight pull on the inner assembly can be applied to verify inner contacts seated within the retention clips. After seating, push the inner contact assembly fully forward within the outer contact.
 2. While pushing the inner contact assembly fully forward inside the outer contact, form the cable braid over the rear of the outer contact. Slide the outer ferrule forward over the cable braid as shown. (For tapered type ferrules, slide the ferrule forward until it comes to a stop).
 3. Crimp the outer contact and ferrule using the crimp tool and positioner listed in the table. Crimp once, rotate the tool 45 degrees and crimp again. (.156 Dia. Max. over the ferrule after crimping). Rotate tool 45 degrees and crimp again if necessary.
 4. For pin contacts only: After crimping, check the center pin contact to make certain it is approximately centered inside the outer contact. If not centered, carefully bend the center contact into position using Amphenol Aerospace recommended syringe tip (EFD, Inc. Part No. 5122-B) or straightening tool (10-597492-001) (see back).

21-032911-001 (SOCKET)
21-032910-001 (PIN)

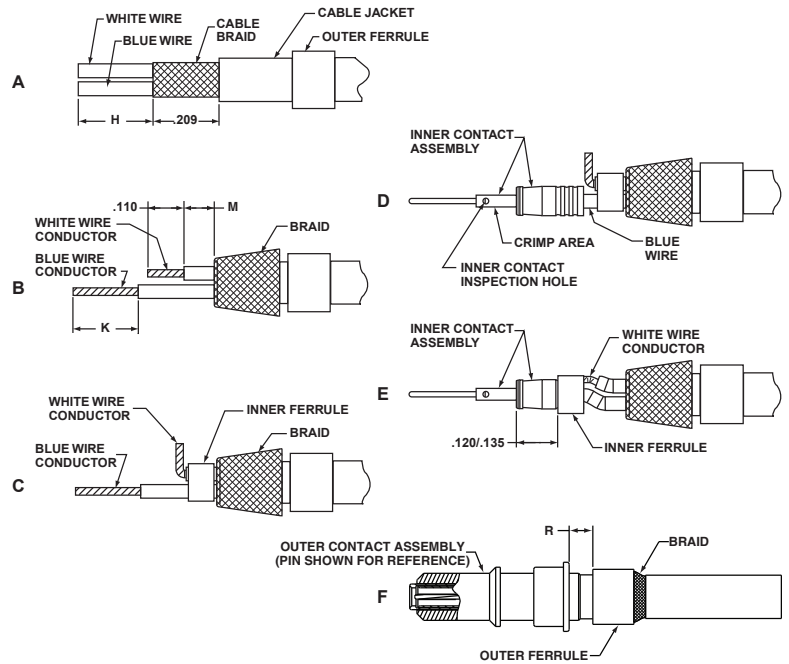

Amphenol Aerospace

AMPHENOL CORPORATION
 Amphenol Aerospace
 40-60 Delaware Avenue
 Sidney, New York 13838-1395
 www.amphenol-aerospace.com

L-2092-BA
 July 2024

FSCM77820

Contact Part Number	Description	Cable Accommodated	Inner Tool Setting	Inner Crimp Tool	Inner Tool Positioner	Intermediate Tool and Positioner	Outer Tool and Positioner	H	K	M	R
21-032911-001	Twinax Socket	M17/176-00002	3	MH992	K1365	GS221 GP1271	GS200-1 G2P1893	.200	.260	.155	.130
21-032910-001	Twinax Pin	M17/176-00002	3	MH992	K2131	GS221 GP1271	GS200-1 G2P1892	.198	.240	.100	.060

CENTER PIN STRAIGHTENING TOOL

